

BVRDCI

Compliant to BS5839-8:2013 & Certified to BSEN54


General purpose I/O interface.

VIGIL 3

VIGIL 2

BENEFITS & FEATURES:

- DIN rail mounted module.
- 16 x analogue voltage sensing inputs for monitored and unmonitored input access, ambient noise sensors, remote volume controls etc.
- 4 x volt free change over relay contacts for busy etc.
- 4 x NPN open collector outputs (max 40V @ 100mA).
- 1 x RS485 port - half duplex.
- Dimensions (mm) 139H x 111W x 25D.

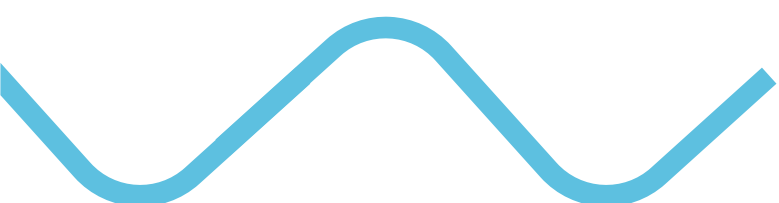

BALDWIN BOX▲LL

LEADING THE WAY TO SAFETY

Baldwin Boxall Communications Ltd
Wealden Industrial Estate, Farningham Road,
Crowborough, East Sussex, TN6 2JR, United Kingdom
T: +44 (0) 1892 664422
E: hello@baldwinboxall.co.uk
W: www.baldwinboxall.co.uk