

ROTAJET DEGREASING MACHINERY

Top Loading Spray Washer



RJ-TL1250

The compact way to degrease

Typically used for lighter components, our top loading spray washers are used worldwide for fast and reliable degreasing.

The RJ-TL series are available as a single stage (wash) or two stage (wash & rinse) system.

To increase the longevity of the system, all products within this range are manufactured from stainless steel parts.

Applications

- To wash motor blocks and parts
- To wash any parts at bus, truck, automobile and work machines
- At the workshop which manufacture machining parts and oiled part
- At the firms which engine reconditioning and cylinder head repairing


Features:

- Completely manufactured with stainless steel sheets and components
- Cleaning process timing
- Developed for minimum water, detergent and electric consumption
- Minimum water consumptions by closed water cycling system.
- Heated water (solution) dispensed through high-pressure jet nozzles
- High user safety with gas pistons
- Gear driven rotary table

Also available as
a small type
TL650 washer




RJ-TL650



ROTAJET DEGREASING MACHINERY

Top Loading Spray Washer

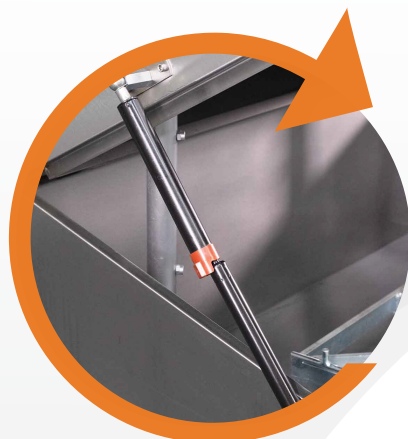

Safety Interlocks

Safety interlocks are automatically engaged during the operation of the machine and are only disengaged when the cycle has come to an end and temperatures have returned to a safe level.



Integrated control measures


We put all the measures in place to so your products are cleaned thoroughly, whilst ensuring the safety of the operator and the longevity of your machine.



Standard sizes

To account for our customers' varying needs, we have produced standardised sizes for our front loading spray washers which are perfect for the majority of degreasing applications. Find the specs below.

MODEL	RJ-TL850	RJ-TL1000	RJ-TL1250
Basket diameter	750	900	1150
Loading height (mm)	350	450	600
Loading capacity (kg)	150	300	450
Tank capacity (Lt)	60	80	200
Pump Pressure (bar)	2.5	2,5	3
Pump quantity and Power	1 Piece x 3, Hp	1 pieces x 3 Hp	1 pieces x 3 Hp
Heater (kW)	7,5	7,5	15
Electricity (V/phrse/Hz)	220-380-415/ 3-1/ 50-60	220-380-412/ 3-1/ 50-60	220-380-412/ 3-1/ 50-60
Process timer (min)	0-90	0-90	0-90
Working Temp(°C)	0-90	0-90	0-90
Rotary Basket	Standard	Standard	Standard
Oil Skimmer	Not Available	Standard	Standard
Packing size and weight (mm)	1260-950-1300 230kg	1450x1080x1340 300kg	1750x1310x1650 440kg



info@rotajet.co.uk
rotajetsystems.co.uk
14 Flanshaw Way, Wakefield
WF2 9LP