




Plain Round Bollard 1200mm Above Ground 76mm - 219mm Diameter Galvanised - Bolt Down

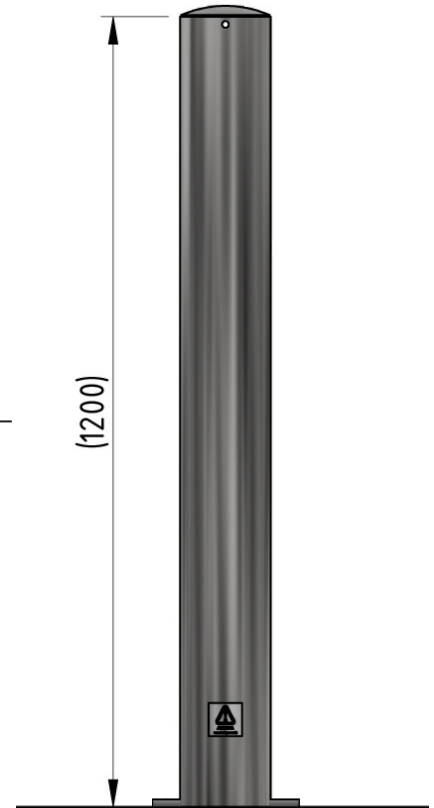

AUTOPA's range of Plain Round Bollards offers a simple and cost effective means of establishing control over parking and access. Plain Round Bollards are ideal for use around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Round Bollards is available in diameters from 76mm to 219mm and is available with extended legs for casting into concrete or with a flange plate for bolting down.

Colour coated and removable versions are also available.

<u>Part Number</u>	<u>Diameter</u>	<u>Weight (kg)</u>
138 121 244	76mm Galvanised	8kg
138 121 274	90mm Galvanised	10kg
138 121 401	114mm Galvanised	13kg
138 121 502	127mm Galvanised	15kg
138 121 607	139mm Galvanised	27kg
138 121 652	152mm Galvanised	17kg
138 121 709	168mm Galvanised	29kg
138 121 806	193mm Galvanised	33kg
138 121 916	219mm Galvanised	44kg

Product details

- 3mm wall thickness - 76mm-127mm and 152mm
- 5mm wall thickness - 139mm, 168mm-219mm
- 3 hole round plate - 133mm x 5mm - 76mm diameter
- 3 hole round plate – 180mm x 5mm – 90mm - 114mm diameters
- 4 hole square plate – 250mm x 10mm – 127mm to 193mm diameters
- 4 hole square plate – 400mm sq x 10mm – 219mm diameter

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

