

Luer Lock Tip Catalogue

Adhesive Dispensing 2026



Precision Industrial Components

Industrial Grade - Silicone Free Luer Lock Dispensing Tips



Dispensing Tip Versions




General Purpose Tips - used for many dispensing applications of most 1-part and 2-part glues, adhesives, pastes, gels and resins. Assembled using a plastic colour coded luer lock hub to a straight stainless steel blunt-end tube. In a vast number of tube diameters from 3.1mm ID to 0.08mm ID and tube lengths of 0.25", 0.5", 1", 1.5", 2", 3", 4", 5". GP tips are supplied in sealed packs of 50, 500 or 1000 pieces. **Pages 4 and 5.**



Bent Angled Tips - used for many dispensing applications of most 1-part and 2-part glues, adhesives, pastes, gels and resins. Assembled using a plastic colour coded luer lock hub to a bent stainless steel blunt-end tube. Tube diameters from 2.26mm ID to 0.08mm ID. Tube lengths of 0.5", 1", 1.5". Bend options of 30°, 45°, 60° and 90° degree. Bent tips are supplied in sealed packs of 50, 500 or 1000 pieces. **Pages 6 and 9.**




Crimped Hub Tips - for dispensing applications of most 1-part and 2-part materials and more aggressive solvent glues. Assembled with a plastic colour coded luer lock hub to a straight stainless steel blunt-end tube. The tube is crimped to the hub with an aluminium sleeve for a more robust design. Tube diameters 1.69mm ID to 0.15mm ID and tube lengths of 0.25", 0.5", 1". In sealed packs of 50, 500 or 1000 pieces. **Pages 10 and 11.**




UV Block Tips - for UV cure and light sensitive adhesives as well as other materials. Assembled using a plastic black opaque luer lock hub to a straight stainless steel blunt-end tube. The light will not impact the adhesive being used. Tube diameters from 1.90mm ID to 0.16mm ID and tube lengths of 0.25", 0.5", 1", 1.5", 2". UV tips are supplied in sealed packs of 50 pieces and bulk packs are available on request. **Page 12.**



Flat End Oval Tips - dispensing applications of most 1-part and 2-part glues, adhesives, pastes, gels and resins. Assembled using a plastic colour coded luer lock hub to a straight stainless steel flat-slit tube. The tube allows for a wider and flatter deposit of material. Lots of tube diameters from 3.1mm ID to 0.25mm ID and tube lengths of 0.25", 0.5", 1", 1.5". Oval tips are supplied in sealed packs of 50, 500 or 1000 pieces. **Page 13.**




Chamfered End Tips - dispensing applications of 1-part and 2-part glues, adhesives, pastes, gels and resins. Assembled using a plastic colour coded luer lock hub to a straight stainless steel chamfered end tube. The chamfer tip design allows for reduced surface contact and better micro-dot control. Tube diameters from 0.84mm ID to 0.10mm ID. Lengths of 0.25", 0.5". In sealed packs of 50, 500 or 1000 pieces. **Page 14.**




Aluminium Hub Tips - for dispensing of most 1-part and 2-part materials and recommended for very aggressive solvents & chemicals. Aluminium luer lock hub to a straight stainless steel blunt-end tube. The hub is welded to the tube to withstand solvent attack. Tube diameters from 1.55mm ID to 0.25mm ID and tube lengths of 0.5", 1", 1.5", 2". Tips supplied in packs of 50 pieces or bulk packs of 500. **Page 15.**




Single Tube Metal Tips - high quality tips with a nickel plated brass luer lock hub to a blunt end single stainless steel tube. The tube is welded to the hub. For use with most materials including UV cure adhesives, gels, pastes and liquids. Tube diameters from 5.08mm ID to 0.10mm ID. Tube lengths of 0.25", 0.5", 1", 1.5", 2", 3", 4", 5", 6". In sealed packs of 10 or 12 pieces. Custom lengths available. **Pages 16 and 17.**




Angled Bend Metal Tips - high quality tips with a nickel plated brass luer lock hub to a blunt end single stainless steel tube. The tube is welded to the hub. For use with most materials including UV cure adhesives, gels, pastes and liquids. Angled 30°, 45°, 60°, 90° bend for reaching into components. Tube diameters from 3.28mm ID to 0.21mm ID and tube lengths of 0.25", 0.5", 1", 1.5". In sealed packs of 12 pieces. **Pages 18 and 19.**



Twin Metal Tips - high quality tips with a nickel plated brass luer lock hub to blunt end twin stainless steel tubes. The tubes are welded to the hub. For use with most materials including UV cure adhesives, gels, pastes and liquids. Tube diameters from 2.1mm ID to 0.15mm ID and tube lengths of 0.25", 0.5", 1". All metal high precision tips are supplied in sealed packs of 10 pieces. **Page 20.**




Triple Metal Tips - high quality tips with a nickel plated brass luer lock hub to blunt end triple stainless steel tubes. The tubes are welded to the hub. For use with most materials including UV cure adhesives, gels, pastes and liquids. Tube diameters from 0.6mm ID to 0.15mm ID and tube lengths of 0.25", 0.5", 1". All metal high precision tips are supplied in sealed packs of 10 pieces. **Page 21 and 22.**



Quad Metal Tips - high quality tips with a nickel plated brass luer lock hub to blunt end four stainless steel tubes. The tubes are welded to the hub. For use with most materials including UV cure adhesives, gels, pastes and liquids. Tube diameters from 0.6mm ID to 0.15mm ID and tube lengths of 0.25", 0.5", 1". All metal high precision tips are supplied in sealed packs of 10 pieces. **Page 23.**



Oval Flat Metal Tips - high quality tips with a nickel plated brass luer lock hub to a blunt end single stainless steel tube. The tube is welded to the hub. For use with most materials including UV cure adhesives, gels, pastes and liquids. Oval flat outlet for a wider, thinner bead deposit. Tube diameters from 3.28mm ID to 0.25mm ID and tube lengths of 0.25", 0.5", 1", 1.5". In sealed packs of 12 pieces. **Page 24.**



Chamfered Metal Tips - high quality tips with a nickel plated brass luer lock hub to a blunt end single stainless steel tube. The tube is welded to the hub. For use with most materials including UV cure adhesives, gels, pastes and liquids. Chamfered outlet for micro dots. Tube diameters from 0.91mm ID to 0.15mm ID and tube lengths of 0.25", 0.5". Supplied in sealed packs of 12 pieces. **Page 25.**

Dispensing Tip Versions



Tapered Tips - used for many dispensing applications of most 1-part and 2-part glues, adhesives, pastes, gels and resins. Made from a plastic colour coded polyethylene material. Tapered tips reduce back pressure and improve material flow for higher viscosity materials & heavy pastes. With a wide number of outlet hole diameters from 3.5mm ID to 0.10mm ID. Smooth flow tapered tips allow for lower pressures. Total tip length is 1.25". These tips are supplied in sealed packs of 50, 500 or 1000 pieces. **Pages 26 and 27.**



Extended Tapered Tips - used for many dispensing applications of most 1-part and 2-part glues, adhesives, pastes, gels and resins. Made from a plastic colour coded polyethylene material. Tapered tips reduce back pressure and improve material flow for higher viscosity materials. A wide number of tube diameters from 3.5mm ID to 0.10mm ID. This extra long tapered tip provides more reach and is useful for potting applications. Total tip length is 2.36" (60mm). Smooth flow tapered tips are supplied in sealed packs of 50, 500 or 1000 pieces. **Page 28.**



Angled Tapered Tips - for dispensing applications of most 1-part and 2-part glues, adhesives, pastes, gels and resins. A plastic colour coded luer lock tip with the smooth flow taper design to reduce back pressure and less resistance. A 30° angle bend tip for easy reach inside parts or under a recess. Outlet hole diameters from 3.1mm ID to 0.08mm ID. The tip 1.25" total length. Angled tapered tips are supplied in sealed packs of 50, 500 or 1000 pieces. **Page 29.**



UV Tapered Tips - for dispensing applications of most 1-part and 2-part glues, UV adhesives, pastes, gels and resins. Made from a plastic black colour polyethylene material. Tapered tips reduce back pressure and improve material flow for higher viscosity materials. Black opaque for UV cure & light sensitive adhesives. Outlet hole diameters from 1.6mm ID to 0.15mm ID. Total tip length is 1.25". UV tapered tips are supplied in sealed packs of 50 with bulk packs of 500 or 1000 pieces on request. **Page 30.**



ESD Safe Tapered Tips - for dispensing applications of most 1-part and 2-part glues, adhesives, pastes, gels and resins. Made from a plastic black ESD safe polyethylene material. Tapered tips reduce back pressure and improve material flow for higher viscosity materials. ESD safe to eliminate static build-up and avoid damage to sensitive components. Outlet hole diameters from 1.6mm ID to 0.2mm ID. Total tip length is 1.25". ESD tapered tips are supplied in sealed packs of 50 with bulk packs of 500 or 1000 pieces on request. **Page 31.**




Tapered Metal Tips - highest quality stainless steel luer lock tips. A tapered design for reduced back pressure and optimal flow. Suitable for use with most materials including UV cure adhesives, gels, pastes, silicones and liquids. Outlet tube hole diameters from 2.0mm ID to 0.10mm ID. Total tip length is 18.25mm. MMT version are single luer lock thread. MMTL are double helix luer lock thread. All metal stainless steel tapered tips are supplied each. **Pages 32 and 33.**



Teflon Flexible Tips - tips designed for dispensing Cyanoacrylate adhesives. A plastic colour coded luer lock hub to a straight flexible soft PTFE tube. The PTFE soft tube prevents the adhesive from rapidly curing inside the tip allowing for longer use. Tube diameters from 2.16mm ID to 0.30mm ID and tube lengths of 0.25", 0.5", 1", 1.5", 2", 3", 4", 5", 6". Teflon PTFE tips are supplied in sealed packs of 50 pieces with bulk packs of 500 or 1000 on request. Custom lengths are also available. **Page 34.**




Teflon Lined Tips - the tips designed for dispensing Cyanoacrylate adhesives. A plastic colour coded luer lock hub to a straight rigid stainless steel blunt-end tube that has a PTFE tube inserted inside. The PTFE soft tube prevents the adhesive from rapidly curing inside the tip allowing for longer use. Tube diameters from 1.40mm ID to 0.20mm ID and tube lengths of 0.25", 0.5", 1", 1.5". PTFE lined tips are supplied in sealed packs of 50 pieces with bulk packs of 500 or 1000 on request. **Page 35.**




Teflon Lined Angled Tips - the tips designed for dispensing Cyanoacrylate adhesives. A plastic colour coded luer lock hub to a 45° bend in stainless steel blunt-end tube with a PTFE tube inserted inside. The PTFE tube prevents the adhesive from rapidly curing inside the tip. Angled design allows access inside parts or into a recess. Tube diameters from 1.40mm ID to 0.20mm ID and tube lengths of 0.5", 1", 1.5". PTFE lined angled tips are supplied in sealed packs of 50 pieces with bulk packs of 500 or 1000 on request. **Page 35.**



Polypro Flexible Tips - for dispensing Cyanoacrylate adhesives, inks, primers, activators, glues. A plastic colour coded luer lock hub to a straight flexible soft polypro tube. The flexible tube will not damage sensitive surfaces and can be cut to suit. Tube diameters are from 1.6mm ID to 0.21mm ID and tube lengths of 0.25", 0.5", 1", 1.5", 2", 3". Polypro flexible tube tips are supplied in sealed packs of 50, 500 or 1000 pieces. Custom lengths are available on request. **Page 36.**



Polypro TSP Flexible Tips - the tips designed for dispensing Cyanoacrylate adhesives and many other materials. A plastic luer lock hub to a straight flexible colour coded polypro tube. The polypro tube will not damage sensitive surfaces and can be cut to suit. Tube diameters from 1.95mm ID to 0.67mm ID and tube lengths of 0.5", 1", 1.5". TSP polypro tips are supplied in sealed packs of 50 pieces with bulk packs of 500 or 1000 on request. **Page 37.**



Brush Tips - spreading applications for glues, inks, paints, primers, activators and more. A luer lock plastic hub and body surrounds a tube that feeds liquid to a bristle for controlled application. The brush bristles range from 2mm wide to 14mm wide. Tube diameters range from 1.6mm ID to 0.2mm ID. Nylon or Sable bristle types. Suitable for use on manual and air-powered dispensing systems. Supplied in a sealed pack of 1 tip or 10 tips. **Pages 38 to 41.**



Sponge Tips - dosing, coating and spreading deposits of low viscosity liquids. A full plastic tip with a sponge shaped outlet. The liquid will coat the sponge allowing for light spreading to surfaces. A luer lock hub provides a leak free attachment to a syringe barrel, luer bottle or dispense valve. With tube sizes ranging from 3.10mm ID to 0.20mm ID. Sponge dispensing tips are supplied each but bulk pack pricing is available on request. **Page 42.**



Assorted Tip Kits - a range of kits with a selection of dispensing tips allowing customers to test and evaluate for different applications. Versions in hard cases and smaller kits in sealed boxes. We can also custom assemble a dispensing tip kit to suit a material type or process. For example, a kit with plastic only tubes and hubs for dispensing Cyanoacrylate adhesives or all-metal tips for an automated robot application. **Page 43.**

AD Series General Purpose Tips

Colour Coded Plastic Luer Lock Hub to Stainless Steel Blunt End Tube



AD Series Blunt End General Purpose Tips

Materials: Polypropylene Hub, Stainless Steel Tube
 Attachment: Luer Lock Thread (Double-Helix)
 Flow Pattern: Straight
 Maximum Pressure: 100 PSI
 Tube Length: 0.25", 0.5", 1", 1.5", 2", 3", 4", 5"
 Pack Sizes: 50, 500 or 1000 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 90289090
 Brand: Adhesive Dispensing Ltd



Our industrial-grade luer lock tips are silicone-free and chloride-free, ensuring contamination-free dispensing while safely operating at up to 100 PSI fluid pressure. Ideal for handling fluids, pastes, adhesives, lubricants, and solvent-based liquids, they deliver consistent flow and superior accuracy.

Enhanced Flow Design for Optimal Performance

The AD series tips feature an advanced tapered internal design, where the stainless steel tube seamlessly integrates with the polypropylene hub, minimizing back pressure and flow restriction.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our general-purpose AD series blunt tips are available in:

- Gauge sizes: 10 to 34 (3.10mm ID to 0.08mm ID)
- Tube lengths: 0.25" (6.35mm), 0.5" (12.70mm), 1" (25.4mm), 1.5" (38.1mm), 2" (50.8mm), 3" (76.2mm), 4" (101.6mm), 5" (127mm)
- Industry-standard hub colour coding for quick identification
- UV-filtered hubs to protect against light exposure



Suitable for dispensing:

- Adhesives
- Glues
- Silicones
- Primers
- Activators
- Solder Pastes
- Solder Fluxes
- Braze Pastes
- SMT Adhesives
- UV Adhesives
- Inks
- Grease
- Many more...

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50, bulk sealed packs 500 or 1000
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide



Gauge	Hub Colour	0.25" Long	0.5 Long	1" Long	1.5" Long	2" Long	3" Long	4" Long	5" Long	Tube ID	Tube OD	Pack Sizes
10	Pale Green	AD710025	AD710050	AD710100	AD710150	AD710200	n/a	n/a	n/a	3.10mm	3.50mm	50, 500 or 1000 pcs
11	Light Orange	AD711025	AD711050	AD711100	AD711150	AD711200	n/a	n/a	n/a	2.60mm	3.00mm	50, 500 or 1000 pcs
12	Light Blue	AD712025	AD712050	AD712100	AD712150	AD712200	n/a	n/a	n/a	2.26mm	2.75mm	50, 500 or 1000 pcs
13	Magenta Red	AD713025	AD713050	AD713100	AD713150	AD713200	n/a	n/a	n/a	1.90mm	2.40mm	50, 500 or 1000 pcs
14	Olive	AD714025	AD714050	AD714100	AD714150	AD714200	AD714300	AD714400	AD714500	1.55mm	1.80mm	50, 500 or 1000 pcs
15	Amber	AD715025	AD715050	AD715100	AD715150	AD715200	AD715300	AD715400	AD715500	1.37mm	1.81mm	50, 500 or 1000 pcs
16	Grey	AD716025	AD716050	AD716100	AD716150	AD716200	AD716300	AD716400	AD716500	1.20mm	1.64mm	50, 500 or 1000 pcs
17	Light Brown	AD717025	AD717050	AD717100	AD717150	AD717200	AD717300	AD717400	AD717500	1.00mm	1.47mm	50, 500 or 1000 pcs
18	Green	AD718025	AD718050	AD718100	AD718150	AD718200	AD718300	AD718400	AD718500	0.84mm	1.27mm	50, 500 or 1000 pcs
19	Dark Brown	AD719025	AD19050	AD719100	AD719150	AD719200	AD719300	AD719400	AD719500	0.72mm	1.03mm	50, 500 or 1000 pcs
20	Pink	AD720025	AD720050	AD720100	AD720150	AD720200	AD720300	AD720400	AD720500	0.61mm	0.91mm	50, 500 or 1000 pcs
21	Purple	AD721025	AD721050	AD721100	AD721150	AD721200	AD721300	AD721400	AD721500	0.51mm	0.79mm	50, 500 or 1000 pcs
22	Blue	AD722025	AD722050	AD722100	AD722150	AD722200	AD722300	AD722400	AD722500	0.41mm	0.71mm	50, 500 or 1000 pcs
23	Orange	AD723025	AD723050	AD723100	AD723150	AD723200	AD723300	n/a	n/a	0.36mm	0.60mm	50, 500 or 1000 pcs
24	Light Red	AD724025	AD724050	AD724100	AD724150	AD724200	n/a	n/a	n/a	0.30mm	0.55mm	50, 500 or 1000 pcs
25	Red	AD725025	AD725050	AD725100	AD725150	AD725200	n/a	n/a	n/a	0.25mm	0.51mm	50, 500 or 1000 pcs
26	Peach	AD726025	AD726050	AD726100	AD726150	AD726200	n/a	n/a	n/a	0.24mm	0.45mm	50, 500 or 1000 pcs
27	Clear	AD727025	AD727050	AD727100	AD727150	AD727200	n/a	n/a	n/a	0.21mm	0.41mm	50, 500 or 1000 pcs
28	White	AD728025	AD728050	AD728100	AD728150	AD728200	n/a	n/a	n/a	0.18mm	0.35mm	50, 500 or 1000 pcs
30	Lavender	AD730025	AD730050	AD730100	AD730150	n/a	n/a	n/a	n/a	0.16mm	0.30mm	50, 500 or 1000 pcs
32	Bright Yellow	AD732025	AD732050	AD732100	n/a	n/a	n/a	n/a	n/a	0.12mm	0.24mm	50, 500 or 1000 pcs
34	Lime Green	AD734025	AD734050	n/a	n/a	n/a	n/a	n/a	n/a	0.08mm	0.23mm	50, 500 or 1000 pcs

TE Series General Purpose Tips

Colour Coded Plastic Luer Lock Hub to Stainless Steel Blunt End Tube



TE Series Blunt End General Purpose Tips

Materials: Polypropylene Hub, Stainless Steel Tube
 Attachment: Luer Lock Thread (Double-Helix)
 Flow Pattern: Straight
 Maximum Pressure: 100 PSI
 Tube Lengths: 0.25", 0.5", 1", 1.5
 Pack Sizes: 50 or 1000 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 90289090
 Brand: Adhesive Dispensing Ltd



Our industrial-grade luer lock tips are silicone-free and chloride-free, ensuring contamination-free dispensing while safely operating at up to 100 PSI fluid pressure. Ideal for handling fluids, pastes, adhesives, lubricants, and solvent-based liquids, they deliver consistent flow and superior accuracy.

Enhanced Flow Design for Optimal Performance

The TE series tips feature an advanced tapered internal design, where the stainless steel tube seamlessly integrates with the polypropylene hub, minimizing back pressure and flow restriction.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our general-purpose AD series blunt tips are available in:

- Gauge sizes: 14 to 34 (1.55 ID to 0.08mm ID)
- Tube lengths: 0.25" (6.35mm), 0.5" (12.70mm), 1" (25.4mm), 1.5" (38.1mm)
- Industry-standard hub colour coding for quick identification
- UV-filtered hubs to protect against light exposure



Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50, bulk sealed packs of 1000
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide


Suitable for dispensing:

- Adhesives
- Glues
- Silicones
- Primers
- Activators
- Solder Pastes
- Solder Fluxes
- Braze Pastes
- SMT Adhesives
- UV Adhesives
- Inks
- Grease
- Many more...

Gauge Size	Hub Colour	0.25" Long	0.5 Long	1" Long	1.5" Long	Tube ID	Tube OD	Pack Sizes
14	Olive	TE714025	TE714050	TE714100	TE714150	1.55mm	1.80mm	50, 1000 pcs
15	Amber	TE715025	TE715050	TE715100	TE715150	1.37mm	1.81mm	50, 1000 pcs
16	Grey	TE716025	TE716050	TE716100	TE716150	1.20mm	1.64mm	50, 1000 pcs
18	Green	TE718025	TE718050	TE718100	TE718150	0.84mm	1.27mm	50, 1000 pcs
20	Pink	TE720025	TE720050	TE720100	TE720150	0.61mm	0.91mm	50, 1000 pcs
21	Purple	TE721025	TE721050	TE721100	TE721150	0.51mm	0.79mm	50, 1000 pcs
22	Blue	TE722025	TE722050	TE722100	TE722150	0.41mm	0.71mm	50, 1000 pcs
23	Orange	TE723025	TE723050	TE723100	TE723150	0.36mm	0.60mm	50, 1000 pcs
25	Red	TE725025	TE725050	TE725100	TE725150	0.25mm	0.51mm	50, 1000 pcs
27	Clear	TE727025	TE727050	TE727100	TE727150	0.21mm	0.41mm	50, 1000 pcs
30	Lavender	TE730025	TE730050	TE730100	TE730150	0.16mm	0.30mm	50, 1000 pcs
32	Bright Yellow	TE732025	TE732050	TE732100	n/a	0.12mm	0.24mm	50, 1000 pcs
34	Lime Green	TE734025	TE734050	n/a	n/a	0.08mm	0.23mm	50, 1000 pcs




AD Series 0.5" Long Angled Tips 45°, 90°, 30°, 60° Colour Coded Plastic Luer Lock Hub to Stainless Steel Blunt End Tube

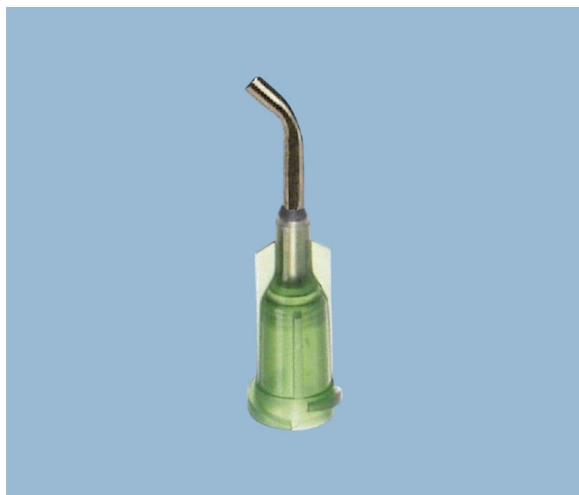

AD Series Blunt End Angled Tips 0.5" Long Angled Tube

Materials: Polypropylene Hub, Stainless Steel Tube
Attachment: Luer Lock Thread (Double-Helix)
Flow Pattern: Angled
Maximum Pressure: 100 PSI
Tube Length: 0.5" - 12.7mm
Pack Sizes: 50, 500 or 1000 Pieces
Details: Industrial Grade, Silicone Free
Commodity Code: 90289090
Brand: Adhesive Dispensing Ltd



Our industrial-grade luer lock tips are silicone-free and chloride-free, ensuring contamination-free dispensing while safely operating at up to 100 PSI fluid pressure. Ideal for handling fluids, pastes, adhesives, lubricants, and solvent-based liquids, they deliver consistent flow and superior accuracy. With a 45°, 90°, 30° or 60° bend angled tube length of 0.5 inch.

Enhanced Flow Design for Optimal Performance

The AD series tips feature an advanced tapered internal design, where the stainless steel tube seamlessly integrates with the polypropylene hub, minimizing back pressure and flow restriction. The bend design is ideal for dispensing into hard to reach places.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our angled-bend AD series blunt end tips are available in:

- Gauge sizes: 12 to 34 (2.26mm ID to 0.08mm ID)
- Tube lengths: 0.5" (12.70mm)
- Industry-standard hub colour coding for quick identification
- UV-filtered hubs to protect against light exposure

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50, bulk packs of 500 or 1000
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide



Suitable for dispensing:

Adhesives
Glues
Silicones
Primers
Activators
Solder Pastes
Solder Fluxes
Brazing Pastes
SMT Adhesives
UV Adhesives
Inks
Grease
Many more...

Gauge Size	Hub Colour	0.5" Long 45°	0.5" Long 90°	0.5" Long 30°	0.5" Long 60°	Tube ID	Tube OD	Pack Sizes
12	Light Blue	AD71205045	AD71205090	n/a	n/a	2.26mm	2.75mm	50, 500, 1000 pcs
13	Magenta Red	AD71305045	AD71305090	n/a	n/a	1.90mm	2.40mm	50, 500, 1000 pcs
14	Olive	AD71405045	AD71405090	AD714005030	AD71405060	1.55mm	1.80mm	50, 500, 1000 pcs
15	Amber	AD71505045	AD71505090	AD715005030	AD71505060	1.37mm	1.81mm	50, 500, 1000 pcs
16	Grey	AD71605045	AD71605090	AD716005030	AD71605060	1.20mm	1.64mm	50, 500, 1000 pcs
17	Light Brown	AD71705045	AD71705090	AD717005030	AD71705060	1.00mm	1.47mm	50, 500, 1000 pcs
18	Green	AD71805045	AD71805090	AD718005030	AD71805060	0.84mm	1.27mm	50, 500, 1000 pcs
19	Dark Brown	AD71905045	AD71905090	AD719005030	AD71905060	0.72mm	1.03mm	50, 500, 1000 pcs
20	Pink	AD72005045	AD72005090	AD720005030	AD72005060	0.61mm	0.91mm	50, 500, 1000 pcs
21	Purple	AD72105045	AD72105090	AD721005030	AD72105060	0.51mm	0.79mm	50, 500, 1000 pcs
22	Blue	AD72205045	AD72205090	AD722005030	AD72205060	0.41mm	0.71mm	50, 500, 1000 pcs
23	Orange	AD72305045	AD72305090	AD723005030	AD72305060	0.36mm	0.60mm	50, 500, 1000 pcs
24	Light Red	AD72405045	AD72405090	AD724005030	AD72405060	0.30mm	0.55mm	50, 500, 1000 pcs
25	Red	AD72505045	AD72505090	AD725005030	AD72505060	0.25mm	0.51mm	50, 500, 1000 pcs
26	Peach	AD72605045	AD72605090	AD726005030	AD72605060	0.24mm	0.45mm	50, 500, 1000 pcs
27	Clear	AD72705045	AD72705090	AD727005030	AD72705060	0.21mm	0.41mm	50, 500, 1000 pcs
28	White	AD72805045	AD72805090	AD728005030	AD72805060	0.18mm	0.35mm	50, 500, 1000 pcs
30	Lavender	AD73005045	AD73005090	AD730005030	AD73005060	0.16mm	0.30mm	50, 500, 1000 pcs
32	Bright Yellow	AD73205045	AD73205090	AD732005030	AD73205060	0.12mm	0.24mm	50, 500, 1000 pcs
34	Lime Green	AD73405045	AD73405090	AD734005030	AD73405060	0.08mm	0.23mm	50, 500, 1000 pcs

AD Series 1" Long Angled Tips 45°, 90°, 30°, 60° Colour Coded Plastic Luer Lock Hub to Stainless Steel Blunt End Tube



AD Series Blunt End Angled Tips 1" Long Angled Tube

Materials: Polypropylene Hub, Stainless Steel Tube
Attachment: Luer Lock Thread (Double-Helix)
Flow Pattern: Angled
Maximum Pressure: 100 PSI
Tube Length: 1.0" - 25.4mm
Pack Sizes: 50, 500 or 1000 Pieces
Details: Industrial Grade, Silicone Free
Commodity Code: 90289090
Brand: Adhesive Dispensing Ltd



Our industrial-grade luer lock tips are silicone-free and chloride-free, ensuring contamination-free dispensing while safely operating at up to 100 PSI fluid pressure. Ideal for handling fluids, pastes, adhesives, lubricants, and solvent-based liquids, they deliver consistent flow and superior accuracy. With a 45°, 90°, 30° or 60° bend angled tube length of 1 inch.

Enhanced Flow Design for Optimal Performance

The AD series tips feature an advanced tapered internal design, where the stainless steel tube seamlessly integrates with the polypropylene hub, minimizing back pressure and flow restriction. The bend design is ideal for dispensing into hard to reach places.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our angled-bend AD series blunt end tips are available in:

- Gauge sizes: 12 to 34 (2.26mm ID to 0.08mm ID)
- Tube lengths: 1.0" (25.40mm)
- Industry-standard hub colour coding for quick identification
- UV-filtered hubs to protect against light exposure

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50, bulk packs of 500 or 1000
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide

Suitable for dispensing:

- Adhesives
- Glues
- Silicones
- Primers
- Activators
- Solder Pastes
- Solder Fluxes
- Braze Pastes
- SMT Adhesives
- UV Adhesives
- Inks
- Grease
- Many more...




Gauge Size	Hub Colour	1" Long 45°	1" Long 90°	1" Long 30°	1" Long 60°	Tube ID	Tube OD	Pack Sizes
14	Olive	AD71410045	AD71410090	AD714010030	AD71410060	1.55mm	1.80mm	50, 500, 1000 pcs
15	Amber	AD71510045	AD71510090	AD715010030	AD71510060	1.37mm	1.81mm	50, 500, 1000 pcs
16	Grey	AD71610045	AD71610090	AD716010030	AD71610060	1.20mm	1.64mm	50, 500, 1000 pcs
17	Light Brown	AD71710045	AD71710090	AD717010030	AD71710060	1.00mm	1.47mm	50, 500, 1000 pcs
18	Green	AD71810045	AD71810090	AD718010030	AD71810060	0.84mm	1.27mm	50, 500, 1000 pcs
19	Dark Brown	AD71910045	AD71910090	AD719010030	AD71910060	0.72mm	1.03mm	50, 500, 1000 pcs
20	Pink	AD72010045	AD72010090	AD720010030	AD72010060	0.61mm	0.91mm	50, 500, 1000 pcs
21	Purple	AD72110045	AD72110090	AD721010030	AD72110060	0.51mm	0.79mm	50, 500, 1000 pcs
22	Blue	AD72210045	AD72210090	AD722010030	AD72210060	0.41mm	0.71mm	50, 500, 1000 pcs
23	Orange	AD72310045	AD72310090	AD723010030	AD72310060	0.36mm	0.60mm	50, 500, 1000 pcs
24	Light Red	AD72410045	AD72410090	AD724010030	AD72410060	0.30mm	0.55mm	50, 500, 1000 pcs
25	Red	AD72510045	AD72510090	AD725010030	AD72510060	0.25mm	0.51mm	50, 500, 1000 pcs
26	Peach	AD72610045	AD72610090	AD726010030	AD72610060	0.24mm	0.45mm	50, 500, 1000 pcs
27	Clear	AD72710045	AD72710090	AD727010030	AD72710060	0.21mm	0.41mm	50, 500, 1000 pcs
28	White	AD72810045	AD72810090	AD728010030	AD72810060	0.18mm	0.35mm	50, 500, 1000 pcs
30	Lavender	AD73010045	AD73010090	AD730010030	AD73010060	0.16mm	0.30mm	50, 500, 1000 pcs
32	Bright Yellow	AD73210045	AD73210090	AD732010030	AD73210060	0.12mm	0.24mm	50, 500, 1000 pcs
34	Lime Green	AD73410045	AD73410090	AD734010030	AD73410060	0.08mm	0.23mm	50, 500, 1000 pcs

AD Series 1.5" Long Angled Tips 45°, 90°, 30°, 60° Colour Coded Plastic Luer Lock Hub to Stainless Steel Blunt End Tube



AD Series Blunt End Angled Tips 1.5" Long Angled Tube

Materials: Polypropylene Hub, Stainless Steel Tube
Attachment: Luer Lock Thread (Double-Helix)
Flow Pattern: Angled
Maximum Pressure: 100 PSI
Tube Length: 1.5" - 38.1mm
Pack Sizes: 50, 500 or 1000 Pieces
Details: Industrial Grade, Silicone Free
Commodity Code: 90289090
Brand: Adhesive Dispensing Ltd



Our industrial-grade luer lock tips are silicone-free and chloride-free, ensuring contamination-free dispensing while safely operating at up to 100 PSI fluid pressure. Ideal for handling fluids, pastes, adhesives, lubricants, and solvent-based liquids, they deliver consistent flow and superior accuracy. With a 45°, 90°, 30° or 60° bend angled tube length of 1.5 inch.

Enhanced Flow Design for Optimal Performance

The AD series tips feature an advanced tapered internal design, where the stainless steel tube seamlessly integrates with the polypropylene hub, minimizing back pressure and flow restriction. The bend design is ideal for dispensing into hard to reach places.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our angled-bend AD series blunt end tips are available in:

- Gauge sizes: 12 to 34 (2.26mm ID to 0.08mm ID)
- Tube lengths: 1.5" (38.10mm)
- Industry-standard hub colour coding for quick identification
- UV-filtered hubs to protect against light exposure

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50, bulk packs of 500 or 1000
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide

Suitable for dispensing:

- Adhesives
- Glues
- Silicones
- Primers
- Activators
- Solder Pastes
- Solder Fluxes
- Braze Pastes
- SMT Adhesives
- UV Adhesives
- Inks
- Grease
- Many more...



Gauge Size	Hub Colour	1.5" Long 45°	1.5" Long 90°	1.5" Long 30°	1".5 Long 60°	Tube ID	Tube OD	Pack Sizes
14	Olive	AD71415045	AD71415090	AD714015030	AD71415060	1.55mm	1.80mm	50, 500, 1000 pcs
15	Amber	AD71515045	AD71515090	AD715015030	AD71515060	1.37mm	1.81mm	50, 500, 1000 pcs
16	Grey	AD71615045	AD71615090	AD716015030	AD71615060	1.20mm	1.64mm	50, 500, 1000 pcs
17	Light Brown	AD71715045	AD71715090	AD717015030	AD71715060	1.00mm	1.47mm	50, 500, 1000 pcs
18	Green	AD71815045	AD71815090	AD718015030	AD71815060	0.84mm	1.27mm	50, 500, 1000 pcs
19	Dark Brown	AD71915045	AD71915090	AD719015030	AD71915060	0.72mm	1.03mm	50, 500, 1000 pcs
20	Pink	AD72015045	AD72015090	AD720015030	AD72015060	0.61mm	0.91mm	50, 500, 1000 pcs
21	Purple	AD72115045	AD72115090	AD721015030	AD72115060	0.51mm	0.79mm	50, 500, 1000 pcs
22	Blue	AD72215045	AD72215090	AD722015030	AD72215060	0.41mm	0.71mm	50, 500, 1000 pcs
23	Orange	AD72315045	AD72315090	AD723015030	AD72315060	0.36mm	0.60mm	50, 500, 1000 pcs
24	Light Red	AD72415045	AD72415090	AD724015030	AD72415060	0.30mm	0.55mm	50, 500, 1000 pcs
25	Red	AD72515045	AD72515090	AD725015030	AD72515060	0.25mm	0.51mm	50, 500, 1000 pcs
26	Peach	AD72615045	AD72615090	AD726015030	AD72615060	0.24mm	0.45mm	50, 500, 1000 pcs
27	Clear	AD72715045	AD72715090	AD727015030	AD72715060	0.21mm	0.41mm	50, 500, 1000 pcs
28	White	AD72815045	AD72815090	AD728015030	AD72815060	0.18mm	0.35mm	50, 500, 1000 pcs
30	Lavender	AD73015045	AD73015090	AD730015030	AD73015060	0.16mm	0.30mm	50, 500, 1000 pcs
32	Bright Yellow	AD73215045	AD73215090	AD732015030	AD73215060	0.12mm	0.24mm	50, 500, 1000 pcs
34	Lime Green	AD73415045	AD73415090	AD734015030	AD73415060	0.08mm	0.23mm	50, 500, 1000 pcs

TE Series 0.5" & 1.5" Long Angled Tips 45°, 90° Colour Coded Plastic Luer Lock Hub to Stainless Steel Blunt End Tube



TE Series Blunt End Angled Tips 0.5", 1.5" Long Angled Tube

Materials: Polypropylene Hub, Stainless Steel Tube
Attachment: Luer Lock Thread (Double-Helix)
Flow Pattern: Angled
Maximum Pressure: 100 PSI
Tube Length: 0.5" - 12.7mm, 1.50" - 38.1mm
Pack Sizes: 50 or 1000 Pieces
Details: Industrial Grade, Silicone Free
Commodity Code: 90289090
Brand: Techcon



TE industrial-grade luer lock tips are silicone-free and chloride-free, ensuring contamination-free dispensing while safely operating at up to 100 PSI fluid pressure. These tips are ideal for handling fluids, pastes, adhesives, lubricants, and solvent-based liquids, they deliver consistent flow and superior accuracy. With a 45°, 90° bend angled tube length of 0.5 inch or 1.50".

Enhanced Flow Design for Optimal Performance

The TE series tips feature an advanced tapered internal design, where the stainless steel tube seamlessly integrates with the polypropylene hub, minimizing back pressure and flow restriction. The bend design is ideal for dispensing materials into hard to reach places.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our angled-bend TE series blunt end tips are available in:

- Gauge sizes: 14 to 30 (1.60mm ID to 0.15mm ID)
- Tube lengths: 0.5" (12.70mm), 1.50" (38.1mm)
- Industry-standard hub colour coding for quick identification
- UV-filtered hubs to protect against light exposure

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50, bulk packs of 1000
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide



Suitable for dispensing:

- Adhesives
- Glues
- Silicones
- Primers
- Activators
- Solder Pastes
- Solder Fluxes
- Braze Pastes
- SMT Adhesives
- UV Adhesives
- Inks
- Grease
- Many more...

For Cyanoacrylate instant adhesives, please consider our angled Teflon-Lined angled tips that will prevent the glues from reacting and blocking prematurely.

When ordering packs of 1000 pieces, the part code ends with -1000 not PK.

Gauge Size	Hub Colour	0.5" Long 45°	0.5" Long 90°	1.5" Long 45°	Tube ID	Tube OD	Pack Sizes
14	Olive	TE714050B45PK	TE714050B90PK	TE714150B45PK	1.60mm	1.80mm	50, 1000 pcs
15	Amber	TE715050B45PK	TE715050B90PK	n/a	1.37mm	1.81mm	50, 1000 pcs
18	Green	TE718050B45PK	TE718050B90PK	TE718150B45PK	0.84mm	1.27mm	50, 1000 pcs
20	Pink	TE720050B45PK	TE720050B90PK	n/a	0.61mm	0.91mm	50, 1000 pcs
21	Purple	TE721050B45PK	TE721050B90PK	TE721150B45PK	0.51mm	0.79mm	50, 1000 pcs
22	Blue	TE722050B45PK	TE722050B90PK	n/a	0.41mm	0.71mm	50, 1000 pcs
23	Orange	TE723050B45PK	TE723050B90PK	n/a	0.33mm	0.60mm	50, 1000 pcs
25	Red	TE725050B45PK	TE725050B90PK	n/a	0.25mm	0.51mm	50, 1000 pcs
27	Clear	TE727050B45PK	TE727050B90PK	n/a	0.21mm	0.41mm	50, 1000 pcs
30	Lavender	TE730050B45PK	TE730050B90PK	n/a	0.16mm	0.30mm	50, 1000 pcs

TES Series 0.25", 0.5", 1" Long Crimped Hub Tips

Colour Coded Plastic Luer Lock Hub to Stainless Steel Blunt End Tube



TES Series Blunt End Crimped Hub Tips

Materials: Polypropylene, Stainless Steel, Aluminium
 Attachment: Luer Lock Thread (Double-Helix)
 Flow Pattern: Straight
 Maximum Pressure: 100 PSI
 Tube Length: 0.25", 0.50", 1.0"
 Pack Sizes: 50, 500 or 1000 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 90289090
 Brand: Adhesive Dispensing Ltd



Our industrial-grade luer lock tips are silicone-free and chloride-free, ensuring contamination-free dispensing while safely operating at up to 100 PSI fluid pressure. Ideal for handling fluids, pastes, adhesives, lubricants, and solvent-based liquids, they deliver consistent flow and superior accuracy.

Enhanced Flow Design for Optimal Performance

The TES series tips feature a more robust design, where the stainless steel is secured with an aluminium crimp to the polypropylene hub, providing a tough defence against more aggressive materials such as solvents.

- ✓ Metal crimp provides a higher strength against solvents and glues
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our TES Crimped series blunt tips are available in:

- Gauge sizes: 14 to 30 (1.69mm ID to 0.15mm ID)
- Tube lengths: 0.25" (6.35mm), 0.5" (12.70mm), 1" (25.4mm)
- Industry-standard hub colour coding for quick identification
- UV-filtered hubs to protect against light exposure

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50, bulk packs of 500 or 1000
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide

Crimped hub tips are suitable for most applications on manual and pneumatic dispensing equipment.

For dispensing extremely aggressive chemicals, consider our all-metal or aluminium tips.



Suitable for dispensing:

- Most Adhesives & Glues
- Solvent Based Glues
- UV Cure Adhesives
- Silicones & RTVs
- Activators & Primers
- Solder Pastes & Fluxes
- Braze Pastes & Fluxes
- SMT Adhesives
- Threadlockers
- Paints & Inks
- Lubricants & Grease
- Many more...

Gauge Size	Hub Colour	0.25" Long	0.50" Long	1.0" Long	Tube ID	Tube OD	Pack Sizes
14	Olive	TES14025	TES14050	TES14100	1.69mm	2.11mm	50, 500, 1000 pcs
15	Light Grey	TES15025	TES15050	TES15100	1.36mm	1.80mm	50, 500, 1000 pcs
16	Dark Grey	TES16025	TES16050	TES1600	1.25mm	1.61mm	50, 500, 1000 pcs
17	Light Brown	TES17025	TES17050	TES17100	1.12mm	1.48mm	50, 500, 1000 pcs
18	Green	TES18025	TES18050	TES18100	0.90mm	1.26mm	50, 500, 1000 pcs
19	Bright Green	TES19025	TES19050	TES19100	0.70mm	1.06mm	50, 500, 1000 pcs
20	Pink	TES20025	TES20050	TES20100	0.60mm	0.90mm	50, 500, 1000 pcs
21	Purple	TES21025	TES21050	TES21100	0.51mm	0.81mm	50, 500, 1000 pcs
22	Blue	TES22025	TES22050	TES22100	0.41mm	0.71mm	50, 500, 1000 pcs
23	Orange	TES23025	TES23050	TES23100	0.33mm	0.63mm	50, 500, 1000 pcs
24	Light Green	TES24025	TES24050	TES24100	0.32mm	0.55mm	50, 500, 1000 pcs
25	Red	TES25025	TES25050	TES25100	0.30mm	0.54mm	50, 500, 1000 pcs
26	Yellow	TES26025	TES26060	TES26100	0.25mm	0.46mm	50, 500, 1000 pcs
27	Clear	TES27025	TES27050	TES27100	0.21mm	0.41mm	50, 500, 1000 pcs
30	Lavender	TES30025	TES30050	TES30100	0.15mm	0.31mm	50, 500, 1000 pcs

TS Series Crimped Hub Tips

Colour Coded Plastic Luer Lock Hub to Stainless Steel Blunt End Tube



TS Series Blunt End Crimped Hub Tips

Materials:	Polyethylene, Stainless Steel, Aluminium
Attachment:	Luer Lock Thread (Single-Helix)
Flow Pattern:	Straight
Maximum Pressure:	100 PSI
Tube Lengths:	3/16", 1/4", 5/16", 1/2", 1.0"
Pack Sizes:	50, 500 or 1000 Pieces
Details:	Industrial Grade, Silicone Free
Commodity Code:	90289090
Brand:	Techcon



TS series industrial-grade luer lock tips are silicone-free and chloride-free, ensuring contamination-free dispensing while safely operating at up to 100 PSI maximum fluid pressure. Ideal for handling fluids, pastes, adhesives, lubricants, and solvent-based liquids, they deliver consistent flow and superior accuracy. With a range of tube lengths.

Enhanced Flow Design for Optimal Performance

TS series tips feature a more robust design, where the stainless steel is secured with an aluminium crimp to the polypropylene hub, providing a tough defence against more aggressive materials such as solvents.

- ✓ Metal crimp provides a higher strength against solvents and glues
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

The TS Crimped series blunt tips are available in:

- Gauge sizes: 18 to 30 (0.84mm ID to 0.15mm ID)
- Tube lengths: 0.25", 0.5", 1", 3/16", 5/16"
- Industry-standard hub colour coding for quick identification
- UV-filtered hubs to protect against light exposure

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50, bulk packs of 500 or 1000
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide

Crimped hub tips are suitable for most applications on manual and pneumatic dispensing equipment.

For dispensing extremely aggressive chemicals, consider our all-metal or aluminium tips.




Suitable for dispensing:

- Most Adhesives & Glues
- Solvent Based Glues
- UV Cure Adhesives
- Silicones & RTVs
- Activators & Primers
- Solder Pastes & Fluxes
- Braze Pastes & Fluxes
- SMT Adhesives
- Threadlockers
- Paints & Inks
- Lubricants & Grease
- Many more...

Gauge Size	Part Code	Hub Colour	Tube Attachment	Connection	Tube Length	Tube ID	Tube OD	Pack Sizes
18	TS18-1/2	Pink	Aluminium Sleeve Crimp	Single Luer Lock	0.50" - 12.7mm	0.84mm	1.27mm	50, 500, 1000 pcs
18	TS18-1	Pink	Aluminium Sleeve Crimp	Single Luer Lock	1.00" - 25.4mm	0.84mm	1.27mm	50, 500, 1000 pcs
19	TS19-1/2	Brown	Aluminium Sleeve Crimp	Single Luer Lock	0.50" - 12.7mm	0.71mm	1.14mm	50, 500, 1000 pcs
19	TS19-1	Brown	Aluminium Sleeve Crimp	Single Luer Lock	1.00" - 25.4mm	0.71mm	1.14mm	50, 500, 1000 pcs
20	TS20-1/2	Yellow	Aluminium Sleeve Crimp	Single Luer Lock	0.50" - 12.7mm	0.61mm	0.91mm	50, 500, 1000 pcs
20	TS20-1	Yellow	Aluminium Sleeve Crimp	Single Luer Lock	1.00" - 25.4mm	0.61mm	0.91mm	50, 500, 1000 pcs
21	TS21-1/2	Green	Aluminium Sleeve Crimp	Single Luer Lock	0.50" - 12.7mm	0.51mm	0.81mm	50, 500, 1000 pcs
22	TS22-1/2	Black	Aluminium Sleeve Crimp	Single Luer Lock	0.50" - 12.7mm	0.41mm	0.71mm	50, 500, 1000 pcs
22	TS22-1	Black	Aluminium Sleeve Crimp	Single Luer Lock	1.00" - 25.4mm	0.41mm	0.71mm	50, 500, 1000 pcs
23	TS23-1/2	Blue	Aluminium Sleeve Crimp	Single Luer Lock	0.50" - 12.7mm	0.33mm	0.64mm	50, 500, 1000 pcs
26	TS26-1	Beige	Aluminium Sleeve Crimp	Single Luer Lock	1.00" - 25.4mm	0.25mm	0.51mm	50, 500, 1000 pcs
27	TS27-1/4	Grey	Aluminium Sleeve Crimp	Single Luer Lock	0.25" - 6.63mm	0.20mm	0.41mm	50, 500, 1000 pcs
30	TS30-3/16	Lavender	Aluminium Sleeve Crimp	Single Luer Lock	3/16" - 4.76mm	0.15mm	0.30mm	50, 500, 1000 pcs
30	TS30-1/4	Lavender	Aluminium Sleeve Crimp	Single Luer Lock	0.25" - 6.35mm	0.15mm	0.30mm	50, 500, 1000 pcs
30	TS30-1/2	Lavender	Aluminium Sleeve Crimp	Single Luer Lock	0.50" - 12.7mm	0.15mm	0.30mm	50, 500, 1000 pcs
30	TS30-5/16	Lavender	Aluminium Sleeve Crimp	Single Luer Lock	5/16" - 7.94mm	0.15mm	0.30mm	50, 500, 1000 pcs

UV Block Black Hub Precision Tips

UV Black Plastic Luer Lock Hub to Stainless Steel Blunt End Tube

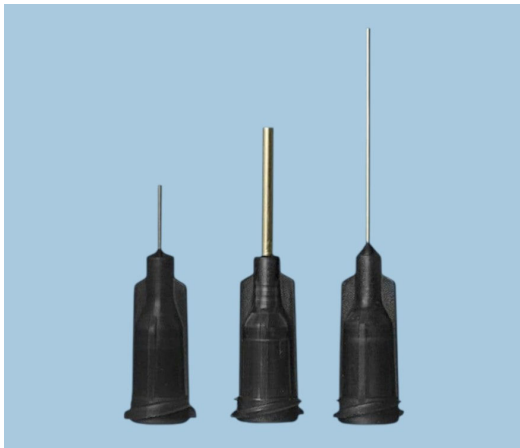

AD Series Blunt End UV Black Hub Tips 0.25" Long Tube

Materials: Polypropylene Hub, Stainless Steel Tube
 Attachment: Luer Lock Thread (Double-Helix)
 Flow Pattern: Straight
 Maximum Pressure: 100 PSI
 Tube Length: 0.25" - 6.35mm
 Pack Sizes: 50 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 90289090
 Brand: Adhesive Dispensing Ltd



New premium industrial-grade luer lock tips are silicone-free and chloride-free, ensuring no contamination when dispensing while safely operating at up to 100 PSI fluid pressure. The opaque black hubs on these tips are ideal for handling most materials but especially UV Cure adhesives, for consistent flow and superior accuracy. Short blunt-end tube length of 0.25 inches.

Enhanced Flow Design for Optimal Performance

The UV series tips feature a more robust design, where the stainless steel is bonded to the polypropylene hub, and the black hub provides 100% protection against UV light.

- ✓ Suitable for dispensing most adhesives and glues
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our general-purpose AD series blunt tips are available in:

- Gauge sizes: 12 to 34 (2.40mm ID to 0.08mm ID)
- Tube lengths: 0.25" (6.35mm), 0.5" (12.70mm), 1" (25.4mm), 1.5" (38.1mm), 2" (50.8mm)
- Black-colour hub for total protection
- Leak free attachment to syringe barrel

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide

UV block tips are suitable for most applications on manual and pneumatic dispensing equipment but are the guarantee protection for UV adhesives.



Suitable for dispensing:

- UV Cure Adhesives
- Other Adhesives
- Flowable Silicones & RTVs
- Activators & Primers
- Solder Pastes & Fluxes
- Braze Pastes & Fluxes
- SMT Adhesives
- Threadlockers
- Paints & Inks
- Lubricants & Grease
- Many more...

Gauge	Size	Hub Colour	0.25" Long	0.5 Long	1" Long	1.5" Long	2" Long	Tube ID	Tube OD	Pack Size
12		Black	AD712025UV	AD712050UV	AD712100UV	AD712150UV	AD712200UV	2.40mm	2.75mm	50 pcs
13		Black	AD713025UV	AD713050UV	AD713100UV	AD713150UV	AD713200UV	1.90mm	2.40mm	50 pcs
14		Black	AD714025UV	AD714050UV	AD714100UV	AD714150UV	AD714200UV	1.55mm	1.80mm	50 pcs
15		Black	AD715025UV	AD715050UV	AD715100UV	AD715150UV	AD715200UV	1.35mm	1.80mm	50 pcs
16		Black	AD716025UV	AD716050UV	AD716100UV	AD716150UV	AD716200UV	1.25mm	1.63mm	50 pcs
17		Black	AD717025UV	AD717050UV	AD717100UV	AD717150UV	AD717200UV	1.00mm	1.48mm	50 pcs
18		Black	AD718025UV	AD718050UV	AD718100UV	AD718150UV	AD718200UV	0.84mm	1.27mm	50 pcs
19		Black	AD719025UV	AD719050UV	AD719100UV	AD719150UV	AD719200UV	0.72mm	1.03mm	50 pcs
20		Black	AD720025UV	AD720050UV	AD720100UV	AD720150UV	AD720200UV	0.61mm	0.91mm	50 pcs
21		Black	AD721025UV	AD721050UV	AD721100UV	AD721150UV	AD721200UV	0.51mm	0.82mm	50 pcs
22		Black	AD722025UV	AD722050UV	AD722100UV	AD722150UV	AD722200UV	0.41mm	0.72mm	50 pcs
23		Black	AD723025UV	AD723050UV	AD723100UV	AD723150UV	AD723200UV	0.33mm	0.63mm	50 pcs
24		Black	AD724025UV	AD724050UV	AD724100UV	AD724150UV	AD724200UV	0.30mm	0.55mm	50 pcs
25		Black	AD725025UV	AD725050UV	AD725100UV	AD725150UV	AD725200UV	0.25mm	0.52mm	50 pcs
26		Black	AD726025UV	AD726050UV	AD726100UV	AD726150UV	AD726200UV	0.23mm	0.45mm	50 pcs
27		Black	AD727025UV	AD727050UV	AD727100UV	AD727150UV	AD727200UV	0.21mm	0.40mm	50 pcs
28		Black	AD728025UV	AD728050UV	AD728100UV	AD728150UV	AD728200UV	0.18mm	0.35mm	50 pcs
30		Black	AD730025UV	AD730050UV	AD730100UV	n/a	n/a	0.16mm	0.31mm	50 pcs
32		Black	AD732025UV	AD732050UV	n/a	n/a	n/a	0.12mm	0.24mm	50 pcs
34		Black	AD734025UV	AD734050UV	n/a	n/a	n/a	0.08mm	0.21mm	50 pcs

Flat End Oval 0.25", 0.5", 1", 1.5" Long Tips

Colour Coded Plastic Luer Lock Hub to Stainless Steel Flat End Tube



AD Series Blunt End General Purpose Tips 0.25" Long Tube

Materials: Polypropylene Hub, Stainless Steel Tube
 Attachment: Luer Lock Thread (Double-Helix)
 Flow Pattern: Straight
 Maximum Pressure: 100 PSI
 Tube Length: 0.25" - 6.35mm
 Pack Sizes: 50 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 90289090
 Brand: Adhesive Dispensing Ltd



Our industrial-grade luer lock tips are silicone-free and chloride-free, ensuring contamination-free dispensing while safely operating at up to 100 PSI fluid pressure. Ideal for handling fluids, pastes, adhesives, lubricants, and solvent-based liquids, they deliver consistent flow and superior accuracy. Short blunt-end tube length of 0.25 inches. Oval type precision tips have a flat design at the end of the stainless steel tube instead of a standard circular hole to apply a wider ribbon type deposit when dispensing material beads. As the liquid or paste is dispensed, it can be applied to surfaces with a thinner, wider deposit.

Enhanced Flow Design for Optimal Performance

The AD series tips feature an advanced tapered internal design, where the stainless steel tube seamlessly integrates with the polypropylene hub, minimizing back pressure and flow restriction.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our general-purpose AD series blunt tips are available in:

- Gauge sizes: 10 to 25 (3.10mm ID to 0.25mm ID)
- Tube lengths: 0.25" (6.35mm), 0.5" (12.70mm), 1" (25.4mm), 1.5" (38.1mm)
- Industry-standard hub colour coding for quick identification
- UV-filtered hubs to protect against light exposure

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide

Oval flat end tips are suitable for most applications on manual and pneumatic dispensing equipment.

Avoid cleaning dispensing tips with aggressive solvents for re-use if dispensing at high pressures.



Suitable for dispensing:

- Adhesives
- Glues
- Silicones
- Primers
- Activators
- Solder Pastes
- Solder Fluxes
- Braze Pastes
- SMT Adhesives
- UV Adhesives
- Inks
- Grease
- Many more...

Gauge	Hub Colour	0.25" Long	0.5 Long	1" Long	1.5" Long	Tube ID	Tube OD	Pack Size
10	Pale Green	AD710025VL	AD710050VL	AD710100VL	AD710150VL	3.10mm	3.50mm	50 pcs
11	Light Orange	AD711025VL	AD711050VL	AD711100VL	AD711150VL	2.60mm	3.00mm	50 pcs
12	Light Blue	AD712025VL	AD712050VL	AD712100VL	AD712150VL	2.40mm	2.75mm	50 pcs
13	Magenta Red	AD713025VL	AD713050VL	AD713100VL	AD713150VL	1.90mm	2.40mm	50 pcs
14	Olive	AD714025VL	AD714050VL	AD714100VL	AD714150VL	1.55mm	1.80mm	50 pcs
15	Amber	AD715025VL	AD715050VL	AD715100VL	AD715150VL	1.35mm	1.70mm	50 pcs
16	Grey	AD716025VL	AD716050VL	AD716100VL	AD716150VL	1.25mm	1.63mm	50 pcs
17	Light Brown	AD717025VL	AD717050VL	AD717100VL	AD717150VL	1.00mm	1.47mm	50 pcs
18	Green	AD718025VL	AD718050VL	AD718100VL	AD718150VL	0.84mm	1.27mm	50 pcs
19	Dark Brown	AD719025VL	AD719050VL	AD719100VL	AD719150VL	0.72mm	1.03mm	50 pcs
20	Pink	AD720025VL	AD720050VL	AD720100VL	AD720150VL	0.61mm	0.91mm	50 pcs
21	Purple	AD721025VL	AD721050VL	AD721100VL	AD721150VL	0.51mm	0.81mm	50 pcs
22	Blue	AD722025VL	AD722050VL	AD722100VL	AD722150VL	0.41mm	0.71mm	50 pcs
23	Orange	AD723025VL	AD723050VL	AD723100VL	AD723150VL	0.36mm	0.64mm	50 pcs
25	Red	AD725025VL	AD725050VL	AD725100VL	AD725150VL	0.25mm	0.51mm	50 pcs

For the full website range, click [here](#)

Chamfered Micro Precision 0.25", 0.5" Long Tips

Colour Coded Plastic Luer Lock Hub to Stainless Steel Chamfered End



AD Series Chamfered Tips 0.25", 0.50" Long Tube

Materials:	Polypropylene Hub, Stainless Steel Tube
Attachment:	Luer Lock Thread (Double-Helix)
Flow Pattern:	Straight
Maximum Pressure:	100 PSI
Tube Length:	0.25", 0.50"
Pack Sizes:	50 Pieces
Details:	Industrial Grade, Silicone Free
Commodity Code:	90289090
Brand:	Adhesive Dispensing Ltd



Our industrial-grade luer lock tips are silicone-free and chloride-free, ensuring contamination-free dispensing while safely operating at up to 100 PSI fluid pressure. Ideal for handling fluids, pastes, adhesives, lubricants, and solvent-based liquids, they deliver consistent flow and superior accuracy. Chamfered tube tips for dispensing solvents, many other liquids as well as difficult to dispense adhesives or materials. The tapered point at the end outlet of the tip reduces the needle area that a liquid or paste can grip to, providing better dispensing control and less curl onto the tip tube. Our chamfered tips are ideal for dispensing between delicate surfaces or making exact, repeatable micro-deposits. Tube length of 0.50 inch.

Enhanced Flow Design for Optimal Performance

The AD series tips feature an advanced tapered internal design, where the stainless steel tube seamlessly integrates with the polypropylene hub, minimizing back pressure and flow restriction.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our chamfered-end AD series blunt tips are available in:


- Gauge sizes: 18 to 30 (0.84mm ID to 0.15mm ID)
- Tube lengths: 0.25" (6.35mm), 0.5" (12.70mm), 1.0" (25.40mm)
- Industry-standard hub colour coding for quick identification
- UV-filtered hubs to protect against light exposure

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide

Oval flat end tips are suitable for most applications on manual and pneumatic dispensing equipment.

Avoid cleaning dispensing tips with aggressive solvents for re-use if dispensing at high pressures.

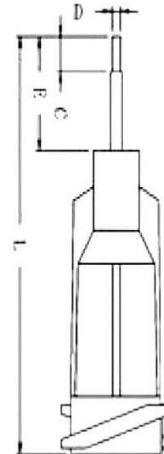

Suitable for dispensing:

- Adhesives
- Glues
- Flowable Silicones
- Primers
- Activators
- Solder Fluxes
- Braze Fluxes
- SMT Adhesives
- UV Cure Adhesives
- Solvents
- Lubricants & Grease
- Many more...

Gauge Size	Hub Colour	0.25" Long	0.50" Long	Tube ID	Tube OD	Pack Size
18	Green	CHT18025	CHT18050	0.84mm	1.28mm	50 pcs
19	Black	CHT19025	CHT19050	0.75mm	1.05mm	50 pcs
20	Pink	CHT20025	CHT20050	0.61mm	0.91mm	50 pcs
21	Purple	CHT21025	CHT21050	0.51mm	0.82mm	50 pcs
22	Blue	CHT22025	CHT22050	0.41mm	0.72mm	50 pcs
23	Orange	CHT23025	CHT23050	0.33mm	0.65mm	50 pcs
24	Light Red	CHT02425	CHT02450	0.30mm	0.56mm	50 pcs
25	Dark Red	CHT25025	CHT25050	0.25mm	0.52mm	50 pcs
26	Beige	CHT26025	CHT26050	0.24mm	0.46mm	50 pcs
27	Clear	CHT27025	CHT27050	0.21mm	0.40mm	50 pcs
30	Lavender	CHT30025	CHT30050	0.15mm	0.31mm	50 pcs

Aluminium Hub Precision Tips

Aluminium Luer Lock Hub to Stainless Steel Blunt End



AD Series Aluminium Blunt End Tips 0.50", 1", 1.5", 2" Long Tubes

Materials:	Aluminium Hub, Stainless Steel Tube
Attachment:	Luer Lock Thread (Single-Helix)
Flow Pattern:	Straight
Maximum Pressure:	100 PSI
Tube Length:	0.50" - 12.7mm, 1.0" - 25.4mm, 1.5" - 38.1mm, 2" - 50.8mm
Pack Sizes:	50 Pieces
Details:	Industrial Grade, Silicone Free
Commodity Code:	90289090
Brand:	Adhesive Dispensing Ltd



Our industrial-grade luer lock tips are silicone-free and chloride-free, ensuring contamination-free dispensing while safely operating at up to 100 PSI fluid pressure. Ideal for handling fluids, pastes, adhesives, lubricants, and solvent-based liquids, they deliver consistent flow and superior accuracy. Precision aluminium hub to burr-free stainless steel blunt-end tube. This tip range suits the most aggressive of fluids, chemicals, solvents and many adhesives and gels. The luer lock hub is welded to the tube and providing a more robust assembly. Tube lengths of 0.50 inch, 1.0 inch, 1.5 inch or 2.0 inch.

Enhanced Flow Design for Optimal Performance

The TSM series tips feature an advanced tapered internal design, where the stainless steel tube seamlessly integrates with the hub, minimizing back pressure and flow restriction.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our aluminium hub series blunt tips are available in:

- Gauge sizes: 14 to 25 (1.55mm ID to 0.25mm ID)
- Tube lengths: 0.50" (12.7mm), 1.0" (25.4mm), 1.5" (38.1mm), 2" (50.8mm)
- Aluminium hubs to protect against aggressive solvents and chemicals

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50 or 500
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide

Suitable for dispensing:

- Adhesives
- Glues
- Flowable Silicones
- Primers & Activators
- Solder Pastes & Fluxes
- Braze Pastes & Fluxes
- Chemicals
- UV Cure Adhesives
- Solvents
- Lubricants & Grease
- Many more...



ADL brand Aluminium version



Gauge Size	Colour	Connection	0.50 Long	1.0" Long	1.5" Long	2.0" Long	Tube ID	Tube OD	Pack Sizes
14	Silver	Single Luer Lock	AD14-1/2M	AD14-1M	AD14-15M	AD14-2M	1.55mm	1.82mm	50 or 500 pcs
15	Silver	Single Luer Lock	AD15-1/2M	AD15-1M	AD15-15M	AD15-2M	1.37mm	1.69mm	50 or 500 pcs
16	Silver	Single Luer Lock	AD16-1/2M	AD16-1M	AD16-15M	AD16-2M	1.26mm	1.62mm	50 or 500 pcs
17	Silver	Single Luer Lock	AD17-1/2M	AD17-1M	AD17-15M	AD17-2M	1.04mm	1.32mm	50 or 500 pcs
18	Silver	Single Luer Lock	AD18-1/2M	AD18-1M	n/a	AD18-2M	0.84mm	1.27mm	50 or 500 pcs
20	Silver	Single Luer Lock	AD20-1/2M	n/a	n/a	n/a	0.71mm	1.14mm	50 or 500 pcs
25	Silver	Single Luer Lock	n/a	AD25-1M	n/a	n/a	0.25mm	0.51mm	50 or 500 pcs

TECHCON brand Aluminium version



Gauge Size	Colour	Connection	0.50 Long	1.0" Long	2.0" Long	Tube ID	Tube OD	Pack Sizes
14	Silver	Single Luer Lock	TS14-1/2M-500	TS14-1M-500	TS14-2M-500	1.55mm	1.82mm	50 or 500 pcs
15	Silver	Single Luer Lock	n/a	TS15-1M-500	n/a	1.37mm	1.69mm	50 or 500 pcs
16	Silver	Single Luer Lock	n/a	TS16-1M-500	n/a	1.26mm	1.62mm	50 or 500 pcs

For the full website range, click [here](#)

ADSS All-Metal High Precision Tips

Nickel Plated Brass Luer Lock Hub to Stainless Steel Blunt End



AD Series All Metal Blunt End Tips

Materials: Aluminium Hub, Stainless Steel Tube
 Attachment: Luer Lock Thread (Single-Helix)
 Flow Pattern: Straight
 Maximum Pressure: 100 PSI
 Tube Length: 0.25", 0.50", 1.0", 1.5"
 Tube Outlet: Blunt-END
 Pack Sizes: 12 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 90289090
 Brand: Adhesive Dispensing Ltd



Our ADSS needle series consist of a nickel plated brass luer lock hub welded to a stainless steel blunt end tube. This high quality line of dispensing needles is burr-free, and electro-polished shaft for unobstructed and consistent material flow. Dispensing tips are designed to work with standard syringes and fittings. These tips are fully compatible with most low, medium and high viscosity fluids, adhesives, inks, pastes, gels and lubricant. Tube length of 0.25 inch.

Enhanced Flow Design for Optimal Performance

The all metal tips feature an advanced tapered internal design, where the stainless steel tube seamlessly integrates with the hub, minimizing back pressure and flow restriction.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our all metal series blunt tips are available in:

- Gauge sizes: 8 to 32 (3.28mm ID to 0.12mm ID)
- Tube lengths: 0.25" (6.35mm), 0.50" (12.7mm), 1.0" (25.4mm), 1.5" (38.1mm)
- Metal construction to protect against aggressive solvents and chemicals

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 12 Pieces
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide




Suitable for dispensing:

Adhesives & Glues
 Flowable Silicones
 Primers & Activators
 Solder Pastes & Fluxes
 Braze Pastes & Fluxes
 Chemicals
 UV Cure Adhesives
 Solvents
 Lubricants & Grease
 Many more...

Gauge Size	Colour	Connection	0.25" Long	0.5 Long	1" Long	1.5" Long	Tube ID	Tube OD	Pack Size
8	Silver	Single Luer Lock	AD8SS-1/4	AD8SS-1/2	AD8SS-1	AD8SS-15	3.28mm	4.04mm	12 pcs
10	Silver	Single Luer Lock	AD10SS-1/4	AD10SS-1/2	AD10SS-1	AD10SS-15	2.50mm	3.30mm	12 pcs
11	Silver	Single Luer Lock	AD11SS-1/4	AD11SS-1/2	AD11SS-1	AD11SS-15	2.30mm	2.95mm	12 pcs
12	Silver	Single Luer Lock	AD12SS-1/4	AD12SS-1/2	AD12SS-1	AD12SS-15	2.29mm	2.75mm	12 pcs
13	Silver	Single Luer Lock	AD13SS-1/4	AD13SS-1/2	AD13SS-1	AD13SS-15	1.94mm	2.40mm	12 pcs
14	Silver	Single Luer Lock	AD14SS-1/4	AD14SS-1/2	AD14SS-1	AD14SS-15	1.64mm	2.10mm	12 pcs
15	Silver	Single Luer Lock	AD15SS-1/4	AD15SS-1/2	AD15SS-1	AD15SS-15	1.38mm	1.84mm	12 pcs
16	Silver	Single Luer Lock	AD16SS-1/4	AD16SS-1/2	AD16SS-1	AD16SS-15	1.20mm	1.65mm	12 pcs
17	Silver	Single Luer Lock	AD17SS-1/4	AD17SS-1/2	AD17SS-1	AD17SS-15	1.10mm	1.49mm	12 pcs
18	Silver	Single Luer Lock	AD18SS-1/4	AD18SS-1/2	AD18SS-1	AD18SS-15	0.91mm	1.25mm	12 pcs
19	Silver	Single Luer Lock	AD19SS-1/4	AD19SS-1/2	AD19SS-1	AD19SS-15	0.70mm	1.10mm	12 pcs
20	Silver	Single Luer Lock	AD20SS-1/4	AD20SS-1/2	AD20SS-1	AD20SS-15	0.60mm	0.90mm	12 pcs
21	Silver	Single Luer Lock	AD21SS-1/4	AD21SS-1/2	AD21SS-1	AD21SS-15	0.51mm	0.81mm	12 pcs
22	Silver	Single Luer Lock	AD22SS-1/4	AD22SS-1/2	AD22SS-1	AD22SS-15	0.40mm	0.71mm	12 pcs
23	Silver	Single Luer Lock	AD23SS-1/4	AD23SS-1/2	AD23SS-1	AD23SS-15	0.34mm	0.64mm	12 pcs
24	Silver	Single Luer Lock	AD24SS-1/4	AD24SS-1/2	AD24SS-1	AD24SS-15	0.31mm	0.56mm	12 pcs
25	Silver	Single Luer Lock	AD25SS-1/4	AD25SS-1/2	AD25SS-1	AD25SS-15	0.26mm	0.52mm	12 pcs
26	Silver	Single Luer Lock	AD26SS-1/4	AD26SS-1/2	AD26SS-1	AD26SS-15	0.25mm	0.46mm	12 pcs
27	Silver	Single Luer Lock	AD27SS-1/4	AD27SS-1/2	AD27SS-1	AD27SS-15	0.21mm	0.42mm	12 pcs
28	Silver	Single Luer Lock	AD28SS-1/4	AD28SS-1/2	AD28SS-1	AD28SS-15	0.18mm	0.38mm	12 pcs
30	Silver	Single Luer Lock	AD30SS-1/4	AD30SS-1/2	AD30SS-1	AD30SS-15	0.16mm	0.31mm	12 pcs
32	Silver	Single Luer Lock	AD32SS-1/4	AD32SS-1/2	AD32SS-1	n/a	0.12mm	0.25mm	12 pcs

TSS All-Metal High Precision Tips

Nickel Plated Brass Luer Lock Hub to Stainless Steel Blunt End

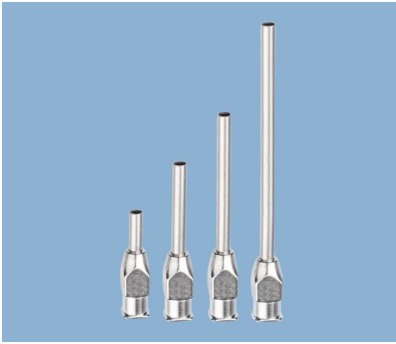

TSS Series All Metal Blunt End Tips

Materials: Aluminium Hub, Stainless Steel Tube
 Attachment: Luer Lock Thread (Single-Helix)
 Flow Pattern: Straight
 Maximum Pressure: 100 PSI
 Tube Length: 0.25", 0.5", 1", 1.5", 2", 3", 4", 5", 6"
 Pack Sizes: 10 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 90289090
 Brand: Adhesive Dispensing Ltd



Our highest quality TSS needle series consist of a nickel plated brass luer lock hub welded to a stainless steel blunt end tube. This high quality line of dispensing needles is burr-free, and electro-polished shaft for unobstructed and consistent material flow. Dispensing tips are designed to work with standard syringes and fittings. These tips are fully compatible with most low, medium and high viscosity fluids, adhesives, inks, pastes, gels and lubricant. Tube length of 0.25 inch.

Enhanced Flow Design for Optimal Performance

The all-metal tips feature an advanced tapered internal design, where the stainless steel tube seamlessly integrates with the hub, minimizing back pressure and flow restriction.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our all metal series blunt tips are available in:

- Gauge sizes: 4 to 30 (5.08mm ID to 0.16mm ID)
- Tube lengths: 0.25" (6.35mm), 0.5" (12.7mm), 1" (25.4mm), 1.5" (38.1mm), 2" (50.8mm), 3" (76.2mm), 4" (101.6mm), 5" (127mm), 6" (152.4mm)
- Metal construction to protect against aggressive solvents and chemicals

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 10 Pieces
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide




Suitable for dispensing:

- Adhesives & Glues
- Flowable Silicones
- Primers & Activators
- Solder Pastes & Fluxes
- Braze Pastes & Fluxes
- Chemicals
- UV Cure Adhesives
- Solvents
- Lubricants & Grease
- Many more...

Gauge	Colour	0.25" Long	0.5 Long	1" Long	1.5" Long	2" Long	3" Long	4" Long	5" Long	6" Long	Tube ID	Tube OD
4	Silver	n/a	TS4SS-1/2	TS4SS-1	TS4SS-15	TS4SS-2	TS4SS-3	TS4SS-4	TS4SS-5	TS4SS-6	5.08mm	6.00mm
5	Silver	n/a	TS5SS-1/2	TS5SS-1	TS5SS-15	TS5SS-2	TS5SS-3	TS5SS-4	TS5SS-5	TS5SS-6	4.50mm	5.50mm
6	Silver	TS6SS-1/4	TS6SS-1/2	TS6SS-1	TS6SS-15	TS6SS-2	TS6SS-3	TS6SS-4	TS6SS-5	TS6SS-6	4.04mm	4.98mm
7	Silver	TS7SS-1/4	TS7SS-1/2	TS7SS-1	TS7SS-15	TS7SS-2	TS7SS-3	TS7SS-4	TS7SS-5	TS7SS-6	3.66mm	4.49mm
8	Silver	TS8SS-1/4	TS8SS-1/2	TS8SS-1	TS8SS-15	TS8SS-2	TS8SS-3	TS8SS-4	TS8SS-5	TS8SS-6	3.28mm	4.04mm
9	Silver	TS9SS-1/4	TS9SS-1/2	TS9SS-1	TS9SS-15	TS9SS-2	TS9SS-3	TS9SS-4	TS9SS-5	TS9SS-6	2.87mm	3.69mm
10	Silver	TS10SS-1/4	TS10SS-1/2	TS10SS-1	TS10SS-15	TS10SS-2	TS10SS-3	TS10SS-4	TS10SS-5	TS10SS-6	2.50mm	3.30mm
11	Silver	TS11SS-1/4	TS11SS-1/2	TS11SS-1	TS11SS-15	TS11SS-2	TS11SS-3	TS11SS-4	TS11SS-5	TS11SS-6	2.30mm	2.95mm
12	Silver	TS12SS-1/4	TS12SS-1/2	TS12SS-1	TS12SS-15	TS12SS-2	TS12SS-3	TS12SS-4	TS12SS-5	TS12SS-6	2.29mm	2.75mm
13	Silver	TS13SS-1/4	TS13SS-1/2	TS13SS-1	TS13SS-15	TS13SS-2	TS13SS-3	TS13SS-4	TS13SS-5	TS13SS-6	1.94mm	2.40mm
14	Silver	TS14SS-1/4	TS14SS-1/2	TS14SS-1	TS14SS-15	TS14SS-2	TS14SS-3	TS14SS-5	TS14SS-5	TS14SS-6	1.64mm	2.10mm
15	Silver	TS15SS-1/4	TS15SS-1/2	TS15SS-1	TS15SS-15	TS15SS-2	TS15SS-3	TS15SS-4	TS15SS-5	TS15SS-6	1.38mm	1.84mm
16	Silver	TS16SS-1/4	TS16SS-1/2	TS16SS-1	TS16SS-15	TS16SS-2	TS16SS-3	TS16SS-4	TS16SS-5	TS16SS-6	1.20mm	1.65mm
17	Silver	TS17SS-1/4	TS17SS-1/2	TS17SS-1	TS17SS-15	TS17SS-2	TS17SS-3	TS17SS-4	TS17SS-5	TS17SS-6	1.09mm	1.59mm
18	Silver	TS18SS-1/4	TS18SS-1/2	TS18SS-1	TS18SS-15	TS18SS-2	TS18SS-3	TS18SS-4	TS18SS-5	TS18SS-6	0.91mm	1.25mm
19	Silver	TS19SS-1/4	TS19SS-1/2	TS19SS-1	TS19SS-15	TS19SS-2	TS19SS-3	TS19SS-4	TS19SS-5	TS19SS-6	0.70mm	1.10mm
20	Silver	TS20SS-1/4	TS20SS-1/2	TS20SS-1	TS20SS-15	TS20SS-2	TS20SS-3	TS20SS-4	TS20SS-5	TS20SS-6	0.60mm	0.90mm
21	Silver	TS21SS-1/4	TS21SS-1/2	TS21SS-1	TS21SS-15	TS21SS-2	TS21SS-3	TS21SS-4	TS21SS-5	TS21SS-6	0.51mm	0.81mm
22	Silver	TS22SS-1/4	TS22SS-1/2	TS22SS-1	TS22SS-15	TS22SS-2	TS22SS-3	TS22SS-4	TS22SS-5	TS22SS-6	0.40mm	0.71mm
23	Silver	TS23SS-1/4	TS23SS-1/2	TS23SS-1	TS23SS-15	TS23SS-2	TS23SS-3	TS23SS-4	TS23SS-5	TS23SS-6	0.34mm	0.64mm
24	Silver	TS24SS-1/4	TS24SS-1/2	TS24SS-1	TS24SS-15	TS24SS-2	TS24SS-3	TS24SS-5	TS24SS-5	TS24SS-6	0.31mm	0.56mm
25	Silver	TS25SS-1/4	TS25SS-1/2	TS25SS-1	TS25SS-15	TS25SS-2	TS25SS-3	TS25SS-4	TS25SS-5	TS25SS-6	0.26mm	0.51mm
26	Silver	TS26SS-1/4	TS26SS-1/2	TS26SS-1	TS26SS-15	TS26SS-2	TS26SS-3	TS26SS-4	TS26SS-5	TS26SS-6	0.25mm	0.46mm
27	Silver	TS27SS-1/4	TS27SS-1/2	TS27SS-1	TS27SS-15	TS27SS-2	TS27SS-3	TS27SS-4	TS27SS-5	TS27SS-6	0.21mm	0.41mm
28	Silver	TS28SS-1/4	TS28SS-1/2	TS28SS-1	TS28SS-15	TS28SS-2	n/a	n/a	n/a	n/a	0.18mm	0.36mm
29	Silver	TS29SS-1/4	TS29SS-1/2	TS29SS-1	TS29SS-15	TS29SS-2	n/a	n/a	n/a	n/a	0.17mm	0.34mm
30	Silver	TS30SS-1/4	TS30SS-1/2	TS30SS-1	TS30SS-15	n/a	n/a	n/a	n/a	n/a	0.16mm	0.31mm

ADSS Series 45° Bend Angled Tips

Nickel Plated Brass Luer Lock Hub to Stainless Steel Bent Blunt End

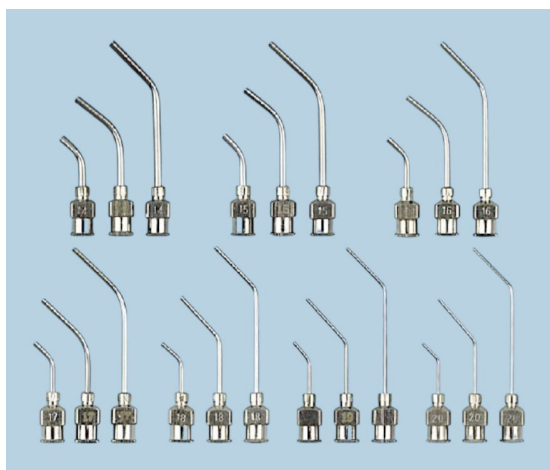

AD Series All Metal Blunt End 45° Angled Tips

Materials: Aluminium Hub, Stainless Steel Tube
 Attachment: Luer Lock Thread (Single-Helix)
 Flow Pattern: 45°
 Maximum Pressure: 100 PSI
 Tube Length: 0.50", 1.0", 1.5"
 Tube Outlet: Blunt-End
 Pack Sizes: 12 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 90289090
 Brand: Adhesive Dispensing Ltd



Our ADSS needle series consist of a nickel plated brass luer lock hub welded to a stainless steel blunt end tube. This high quality line of dispensing needles is burr-free, and electro-polished shaft for unobstructed and consistent material flow. Dispensing tips are designed to work with standard syringes and fittings. These tips are fully compatible with most low, medium and high viscosity fluids, adhesives, inks, pastes, gels and lubricant. With a 45° bend angled blunt-end tube. For reaching into more difficult areas.

Enhanced Flow Design for Optimal Performance

The all metal tips feature an advanced tapered internal design, where the stainless steel tube seamlessly integrates with the hub, minimizing back pressure and flow restriction.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our all metal bent series blunt tips are available in:

- Gauge sizes: 10 to 34 (2.50mm ID to 0.08mm ID)
- Tube lengths: 0.50" (12.7mm), 1.0" (25.4mm), 1.5" (38.1mm)
- Metal construction to protect against aggressive solvents and chemicals

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 12 Pieces
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide



Suitable for dispensing:

- Adhesives & Glues
- Flowable Silicones
- Primers & Activators
- Solder Pastes & Fluxes
- Braze Pastes & Fluxes
- Chemicals
- UV Cure Adhesives
- Solvents
- Lubricants & Grease
- Many more...

Gauge Size	Colour	Angle Bend	Connection	0.5 Long	1" Long	1.5" Long	Tube ID	Tube OD	Pack Size
10	Silver	45°	Single Luer Lock	AD10SS45-1/2	AD10SS45-1	AD10SS45-15	2.80mm	3.50mm	12 pcs
11	Silver	45°	Single Luer Lock	AD11SS45-1/2	AD11SS45-1	AD11SS45-15	2.40mm	3.10mm	12 pcs
12	Silver	45°	Single Luer Lock	AD12SS45-1/2	AD12SS45-1	AD12SS45-15	2.27mm	2.77mm	12 pcs
13	Silver	45°	Single Luer Lock	AD13SS45-1/2	AD13SS45-1	AD13SS45-15	1.94mm	2.40mm	12 pcs
14	Silver	45°	Single Luer Lock	AD14SS45-1/2	AD14SS45-1	AD14SS45-15	1.64mm	2.10mm	12 pcs
15	Silver	45°	Single Luer Lock	AD15SS45-1/2	AD15SS45-1	AD15SS45-15	1.43mm	1.83mm	12 pcs
16	Silver	45°	Single Luer Lock	AD16SS45-1/2	AD16SS45-1	AD16SS45-15	1.25mm	1.65mm	12 pcs
17	Silver	45°	Single Luer Lock	AD17SS45-1/2	AD17SS45-1	AD17SS45-15	1.11mm	1.29mm	12 pcs
18	Silver	45°	Single Luer Lock	AD18SS45-1/2	AD18SS45-1	AD18SS45-15	0.92mm	1.28mm	12 pcs
19	Silver	45°	Single Luer Lock	AD19SS45-1/2	AD19SS45-1	AD19SS45-15	0.72mm	1.08mm	12 pcs
20	Silver	45°	Single Luer Lock	AD20SS45-1/2	AD20SS45-1	AD20SS45-15	0.61mm	0.91mm	12 pcs
21	Silver	45°	Single Luer Lock	AD21SS45-1/2	AD21SS45-1	AD21SS45-15	0.52mm	0.82mm	12 pcs
22	Silver	45°	Single Luer Lock	AD22SS45-1/2	AD22SS45-1	AD22SS45-15	0.42mm	0.72mm	12 pcs
23	Silver	45°	Single Luer Lock	AD23SS45-1/2	AD23SS45-1	AD23SS45-15	0.34mm	0.64mm	12 pcs
24	Silver	45°	Single Luer Lock	AD24SS45-1/2	AD24SS45-1	AD24SS45-15	0.31mm	0.56mm	12 pcs
25	Silver	45°	Single Luer Lock	AD25SS45-1/2	AD25SS45-1	AD25SS45-15	0.26mm	0.52mm	12 pcs
26	Silver	45°	Single Luer Lock	AD26SS45-1/2	AD26SS45-1	AD26SS45-15	0.25mm	0.46mm	12 pcs
27	Silver	45°	Single Luer Lock	AD27SS45-1/2	AD27SS45-1	AD27SS45-15	0.21mm	0.42mm	12 pcs
28	Silver	45°	Single Luer Lock	AD28SS45-1/2	AD28SS45-1	AD28SS45-15	0.18mm	0.38mm	12 pcs
30	Silver	45°	Single Luer Lock	AD30SS45-1/2	AD30SS45-1	AD30SS45-15	0.16mm	0.31mm	12 pcs
32	Silver	45°	Single Luer Lock	AD32SS45-1/2	AD32SS45-1	n/a	0.12mm	0.25mm	12 pcs
34	Silver	45°	Single Luer Lock	AD34SS45-1/2	AD34SS45-1	n/a	0.08mm	0.21mm	12 pcs

For the full website range, click [here](#)

ADSS Series 90° Bend Angled Tips

Nickel Plated Brass Luer Lock Hub to Stainless Steel Bent Blunt End



AD Series All Metal Blunt End 90° Angled Tips

Materials:	Aluminium Hub, Stainless Steel Tube
Attachment:	Luer Lock Thread (Single-Helix)
Flow Pattern:	90°
Maximum Pressure:	100 PSI
Tube Length:	0.50", 1.0", 1.5"
Tube Outlet:	Blunt-End
Pack Sizes:	12 Pieces
Details:	Industrial Grade, Silicone Free
Commodity Code:	90289090
Brand:	Adhesive Dispensing Ltd



Our ADSS needle series consist of a nickel plated brass luer lock hub welded to a stainless steel blunt end tube. This high quality line of dispensing needles is burr-free, and electro-polished shaft for unobstructed and consistent material flow. Dispensing tips are designed to work with standard syringes and fittings. These tips are fully compatible with most low, medium and high viscosity fluids, adhesives, inks, pastes, gels and lubricant. With a 90° bend angled longer tube. For reaching into more difficult areas.

Enhanced Flow Design for Optimal Performance

The all metal tips feature an advanced tapered internal design, where the stainless steel tube seamlessly integrates with the hub, minimizing back pressure and flow restriction.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our all metal bent series blunt tips are available in:

- Gauge sizes: 14 to 34 (1.64mm ID to 0.08mm ID)
- Tube lengths: 0.50" (12.7mm), 1.0" (25.4mm), 1.5" (38.1mm)
- Metal construction to protect against aggressive solvents and chemicals

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 12 Pieces
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide

All-metal dispensing tips can be used with most materials including UV cure adhesives.



Suitable for dispensing:

- Adhesives & Glues
- Flowable Silicones
- Primers & Activators
- Solder Pastes & Fluxes
- Braze Pastes & Fluxes
- Chemicals
- UV Cure Adhesives
- Solvents
- Lubricants & Grease
- Many more...

Gauge Size	Colour	Connection	Angle Bend	0.5 Long	1" Long	1.5" Long	Tube ID	Tube OD	Pack Size
10	Silver	Single Luer Lock	90°	AD10SS90-1/2	AD10SS90-1	AD10SS90-15	2.80mm	3.50mm	12 pcs
11	Silver	Single Luer Lock	90°	AD11SS90-1/2	AD11SS90-1	AD11SS90-15	2.40mm	3.10mm	12 pcs
12	Silver	Single Luer Lock	90°	AD12SS90-1/2	AD12SS90-1	AD12SS90-15	2.27mm	2.77mm	12 pcs
13	Silver	Single Luer Lock	90°	AD13SS90-1/2	AD13SS90-1	AD13SS90-15	1.94mm	2.40mm	12 pcs
14	Silver	Single Luer Lock	90°	AD14SS90-1/2	AD14SS90-1	AD14SS90-15	1.64mm	2.10mm	12 pcs
15	Silver	Single Luer Lock	90°	AD15SS90-1/2	AD15SS90-1	AD15SS90-15	1.43mm	1.83mm	12 pcs
16	Silver	Single Luer Lock	90°	AD16SS90-1/2	AD16SS90-1	AD16SS90-15	1.25mm	1.65mm	12 pcs
17	Silver	Single Luer Lock	90°	AD17SS90-1/2	AD17SS90-1	AD17SS90-15	1.11mm	1.29mm	12 pcs
18	Silver	Single Luer Lock	90°	AD18SS90-1/2	AD18SS90-1	AD18SS90-15	0.92mm	1.28mm	12 pcs
19	Silver	Single Luer Lock	90°	AD19SS90-1/2	AD19SS90-1	AD19SS90-15	0.72mm	1.08mm	12 pcs
20	Silver	Single Luer Lock	90°	AD20SS90-1/2	AD20SS90-1	AD20SS90-15	0.61mm	0.91mm	12 pcs
21	Silver	Single Luer Lock	90°	AD21SS90-1/2	AD21SS90-1	AD21SS90-15	0.52mm	0.82mm	12 pcs
22	Silver	Single Luer Lock	90°	AD22SS90-1/2	AD22SS90-1	AD22SS90-15	0.42mm	0.72mm	12 pcs
23	Silver	Single Luer Lock	90°	AD23SS90-1/2	AD23SS90-1	AD23SS90-15	0.34mm	0.64mm	12 pcs
24	Silver	Single Luer Lock	90°	AD24SS90-1/2	AD24SS90-1	AD24SS90-15	0.31mm	0.56mm	12 pcs
25	Silver	Single Luer Lock	90°	AD25SS90-1/2	AD25SS90-1	AD25SS90-15	0.26mm	0.52mm	12 pcs
26	Silver	Single Luer Lock	90°	AD26SS90-1/2	AD26SS90-1	AD26SS90-15	0.25mm	0.46mm	12 pcs
27	Silver	Single Luer Lock	90°	AD27SS90-1/2	AD27SS90-1	AD27SS90-15	0.21mm	0.42mm	12 pcs
28	Silver	Single Luer Lock	90°	AD28SS90-1/2	AD28SS90-1	AD28SS90-15	0.18mm	0.38mm	12 pcs
30	Silver	Single Luer Lock	90°	AD30SS90-1/2	AD30SS90-1	AD30SS90-15	0.16mm	0.31mm	12 pcs
32	Silver	Single Luer Lock	90°	AD32SS90-1/2	AD32SS90-1	n/a	0.12mm	0.25mm	12 pcs
34	Silver	Single Luer Lock	90°	AD34SS90-1/2	AD34SS90-1	n/a	0.08mm	0.21mm	12 pcs

Dual Tube All-Metal High Precision Tips

Nickel Plated Brass Luer Lock Hub to Stainless Steel Blunt End Tubes



AD Series All Metal Blunt End Tips Dual Tubes

Materials:	Aluminium Hub, Stainless Steel Tube
Attachment:	Luer Lock Thread (Single-Helix)
Flow Pattern:	Straight
Maximum Pressure:	100 PSI
Tube Length:	0.25", 0.50", 1.0", 1.5"
Tubes:	2 In-Line Position
Tube Outlet:	Blunt-End
Pack Sizes:	12 Pieces
Details:	Industrial Grade, Silicone Free
Commodity Code:	90289090
Brand:	Adhesive Dispensing Ltd



Our DSS needle series consist of a nickel plated brass luer lock hub welded to dual stainless steel blunt end tubes. This high quality line of dispensing needles is burr-free, and electro-polished shaft for unobstructed and consistent material flow. Dispensing tips are designed to work with standard syringes and fittings. These tips are fully compatible with most low, medium and high viscosity fluids, adhesives, inks, pastes, gels and lubricant. Twin tubes for applications requiring this unique feature.

Enhanced Flow Design for Optimal Performance

The all metal tips feature an advanced tapered internal design, where the stainless steel tubes seamlessly integrate with the hub, minimizing back pressure and flow restriction.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our all metal series dual blunt tips are available in:

- Gauge sizes: 14 to 30 (1.64mm ID to 0.16mm ID)
- Tube lengths: 0.25" (6.35mm), 0.50" (12.7mm), 1.0" (25.4mm), 1.5" (38.1mm)
- Metal construction to protect against aggressive solvents and chemicals

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 12 Pieces
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide

All-metal dispensing tips can be used with most materials including UV cure adhesives.



Suitable for dispensing:

- Adhesives & Glues
- Flowable Silicones
- Primers & Activators
- Solder Pastes & Fluxes
- Braze Pastes & Fluxes
- Chemicals
- UV Cure Adhesives
- Solvents
- Lubricants & Grease
- Many more...

Gauge Size	Colour	Connection	No. of Tubes	0.25" Long	0.5 Long	1" Long	1.5" Long	Tube ID	Tube OD	Pack Size
14	Silver	Single Luer Lock	2	AD14DSS-1/4	AD14DSS-1/2	AD14DSS-1	AD14DSS-15	1.64mm	2.10mm	12 pcs
15	Silver	Single Luer Lock	2	AD15DSS-1/4	AD15DSS-1/2	AD15DSS-1	AD15DSS-15	1.43mm	1.83mm	12 pcs
16	Silver	Single Luer Lock	2	AD16DSS-1/4	AD16DSS-1/2	AD16DSS-1	AD16DSS-15	1.25mm	1.65mm	12 pcs
17	Silver	Single Luer Lock	2	AD17DSS-1/4	AD17DSS-1/2	AD17DSS-1	AD17DSS-15	1.11mm	1.29mm	12 pcs
18	Silver	Single Luer Lock	2	AD18DSS-1/4	AD18DSS-1/2	AD18DSS-1	AD18DSS-15	0.92mm	1.28mm	12 pcs
19	Silver	Single Luer Lock	2	AD19DSS-1/4	AD19DSS-1/2	AD19DSS-1	AD19DSS-15	0.72mm	1.08mm	12 pcs
20	Silver	Single Luer Lock	2	AD20DSS-1/4	AD20DSS-1/2	AD20DSS-1	AD20DSS-15	0.61mm	0.91mm	12 pcs
21	Silver	Single Luer Lock	2	AD21DSS-1/4	AD21DSS-1/2	AD21DSS-1	AD21DSS-15	0.52mm	0.82mm	12 pcs
22	Silver	Single Luer Lock	2	AD22DSS-1/4	AD22DSS-1/2	AD22DSS-1	AD22DSS-15	0.42mm	0.72mm	12 pcs
23	Silver	Single Luer Lock	2	AD23DSS-1/4	AD23DSS-1/2	AD23DSS-1	AD23DSS-15	0.34mm	0.64mm	12 pcs
24	Silver	Single Luer Lock	2	AD24DSS-1/4	AD24DSS-1/2	AD24DSS-1	AD24DSS-15	0.31mm	0.56mm	12 pcs
25	Silver	Single Luer Lock	2	AD25DSS-1/4	AD25DSS-1/2	AD25DSS-1	AD25DSS-15	0.26mm	0.52mm	12 pcs
26	Silver	Single Luer Lock	2	AD26DSS-1/4	AD26DSS-1/2	AD26DSS-1	n/a	0.25mm	0.46mm	12 pcs
27	Silver	Single Luer Lock	2	AD27DSS-1/4	AD27DSS-1/2	AD27DSS-1	n/a	0.21mm	0.42mm	12 pcs
28	Silver	Single Luer Lock	2	AD28DSS-1/4	AD28DSS-1/2	AD28DSS-1	n/a	0.18mm	0.35mm	12 pcs
30	Silver	Single Luer Lock	2	AD30DSS-1/4	AD30DSS-1/2	AD30DSS-1	n/a	0.16mm	0.31mm	12 pcs

Triple Tube All-Metal High Precision Tips

Nickel Plated Brass Luer Lock Hub to Stainless Steel Blunt End Tubes



AD Series All Metal Blunt End Tips Triple Tubes

Materials:	Aluminium Hub, Stainless Steel Tube
Attachment:	Luer Lock Thread (Single-Helix)
Flow Pattern:	Straight
Maximum Pressure:	100 PSI
Tube Lengths:	0.25", 0.50", 1.0"
Tubes:	3 In-Line Position
Tube Outlet:	Blunt-End
Pack Sizes:	12 Pieces
Details:	Industrial Grade, Silicone Free
Commodity Code:	90289090
Brand:	Adhesive Dispensing Ltd



Our TSS needle series consist of a nickel plated brass luer lock hub welded to triple stainless steel blunt end tubes. This high quality line of dispensing needles is burr-free, and electro-polished shaft for unobstructed and consistent material flow. Dispensing tips are designed to work with standard syringes and fittings. These tips are fully compatible with most low, medium and high viscosity fluids, adhesives, inks, pastes, gels and lubricant. Triple tubes for applications requiring this unique feature.

Enhanced Flow Design for Optimal Performance

The all metal tips feature an advanced tapered internal design, where the stainless steel tubes seamlessly integrate with the hub, minimizing back pressure and flow restriction.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our all metal triple series blunt tips are available in:

- Gauge sizes: 15 to 30 (1.43mm ID to 0.16mm ID)
- Tube lengths: 0.25" (6.35mm), 0.50" (12.7mm), 1.0" (25.4mm)
- Metal construction to protect against aggressive solvents and chemicals

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 12 Pieces
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide



Suitable for dispensing:

- Adhesives & Glues
- Flowable Silicones
- Primers & Activators
- Solder Pastes & Fluxes
- Braze Pastes & Fluxes
- Chemicals
- UV Cure Adhesives
- Solvents
- Lubricants & Grease
- Many more...

Gauge Size	Colour	Connection	No. of Tubes	0.25" Long	0.5 Long	1" Long	Tube ID	Tube OD	Pack Size
15	Silver	Single Luer Lock	3	n/a	AD15TSS-1/2	n/a	1.43mm	1.83mm	12 pcs
18	Silver	Single Luer Lock	3	AD18TSS-1/4	AD18TSS-1/2	AD18TSS-1	0.92mm	1.28mm	12 pcs
19	Silver	Single Luer Lock	3	AD19TSS-1/4	AD19TSS-1/2	AD19TSS-1	0.72mm	1.08mm	12 pcs
20	Silver	Single Luer Lock	3	AD20TSS-1/4	AD20TSS-1/2	AD20TSS-1	0.61mm	0.91mm	12 pcs
21	Silver	Single Luer Lock	3	AD21TSS-1/4	AD21TSS-1/2	AD21TSS-1	0.52mm	0.82mm	12 pcs
22	Silver	Single Luer Lock	3	AD22TSS-1/4	AD22TSS-1/2	AD22TSS-1	0.42mm	0.72mm	12 pcs
23	Silver	Single Luer Lock	3	AD23TSS-1/4	AD23TSS-1/2	AD23TSS-1	0.34mm	0.64mm	12 pcs
24	Silver	Single Luer Lock	3	AD24TSS-1/4	AD24TSS-1/2	AD24TSS-1	0.31mm	0.56mm	12 pcs
25	Silver	Single Luer Lock	3	AD25TSS-1/4	AD25TSS-1/2	AD25TSS-1	0.26mm	0.52mm	12 pcs
26	Silver	Single Luer Lock	3	AD26TSS-1/4	AD26TSS-1/2	AD26TSS-1	0.25mm	0.46mm	12 pcs
27	Silver	Single Luer Lock	3	AD27TSS-1/4	AD27TSS-1/2	AD27TSS-1	0.21mm	0.42mm	12 pcs
28	Silver	Single Luer Lock	3	AD28TSS-1/4	AD28TSS-1/2	AD28TSS-1	0.18mm	0.35mm	12 pcs
30	Silver	Single Luer Lock	3	AD30TSS-1/4	AD30TSS-1/2	AD30TSS-1	0.16mm	0.31mm	12 pcs

For the full website range, click [here](#)

Triple Tube Triangle All-Metal High Precision 0.5" Long Tips Nickel Plated Brass Luer Lock Hub to Stainless Steel Blunt End Tubes



AD Series All Metal Blunt End Tips 0.50" Long Triple Tubes
 Materials: Aluminium Hub, Stainless Steel Tube
 Attachment: Luer Lock Thread (Single-Helix)
 Flow Pattern: Straight
 Maximum Pressure: 100 PSI
 Tube Length: 0.50" - 12.7mm
 Tubes: 3 Triangle Position
 Tube Outlet: Blunt-End
 Pack Sizes: 12 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 90289090
 Brand: Adhesive Dispensing Ltd



Our TTSS needle series consist of a nickel plated brass luer lock hub welded to triple stainless steel blunt end tubes. This high quality line of dispensing needles is burr-free, and electro-polished shaft for unobstructed and consistent material flow. Dispensing tips are designed to work with standard syringes and fittings. These tips are fully compatible with most low, medium and high viscosity fluids, adhesives, inks, pastes, gels and lubricant. Tube length of 0.5 inch. Triple tubes for applications requiring this feature.

Enhanced Flow Design for Optimal Performance

The all metal tips feature an advanced tapered internal design, where the stainless steel tubes seamlessly integrate with the hub, minimizing back pressure and flow restriction.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our all metal triple series blunt tips are available in:

- Gauge sizes: 16 to 30 (1.43mm ID to 0.16mm ID)
- Tube length: 0.50" (12.7mm)
- Metal construction to protect against aggressive solvents and chemicals

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 12 Pieces
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide



Suitable for dispensing:

- Adhesives & Glues
- Flowable Silicones
- Primers & Activators
- Solder Pastes & Fluxes
- Braze Pastes & Fluxes
- Chemicals
- UV Cure Adhesives
- Solvents
- Lubricants & Grease
- Many more...

Gauge Size	Colour	Connection	No. of Tubes	Tube Layout	Connection	0.5 Long	Tube ID	Tube OD	Pack Size
16	Silver	Single Luer Lock	3	Triangle Shape	Single Luer Lock	AD16TTSS-1/2	1.43mm	1.83mm	12 pcs
17	Silver	Single Luer Lock	3	Triangle Shape	Single Luer Lock	AD17TTSS-1/2	1.11mm	1.19mm	12 pcs
18	Silver	Single Luer Lock	3	Triangle Shape	Single Luer Lock	AD18TTSS-1/2	0.92mm	1.28mm	12 pcs
19	Silver	Single Luer Lock	3	Triangle Shape	Single Luer Lock	AD19TTSS-1/2	0.72mm	1.08mm	12 pcs
20	Silver	Single Luer Lock	3	Triangle Shape	Single Luer Lock	AD20TTSS-1/2	0.61mm	0.91mm	12 pcs
21	Silver	Single Luer Lock	3	Triangle Shape	Single Luer Lock	AD21TTSS-1/2	0.52mm	0.82mm	12 pcs
22	Silver	Single Luer Lock	3	Triangle Shape	Single Luer Lock	AD22TTSS-1/2	0.42mm	0.72mm	12 pcs
23	Silver	Single Luer Lock	3	Triangle Shape	Single Luer Lock	AD23TTSS-1/2	0.34mm	0.64mm	12 pcs
24	Silver	Single Luer Lock	3	Triangle Shape	Single Luer Lock	AD24TTSS-1/2	0.31mm	0.56mm	12 pcs
25	Silver	Single Luer Lock	3	Triangle Shape	Single Luer Lock	AD25TTSS-1/2	0.26mm	0.52mm	12 pcs
26	Silver	Single Luer Lock	3	Triangle Shape	Single Luer Lock	AD26TTSS-1/2	0.25mm	0.46mm	12 pcs
27	Silver	Single Luer Lock	3	Triangle Shape	Single Luer Lock	AD27TTSS-1/2	0.21mm	0.42mm	12 pcs
28	Silver	Single Luer Lock	3	Triangle Shape	Single Luer Lock	AD28TTSS-1/2	0.18mm	0.35mm	12 pcs
30	Silver	Single Luer Lock	3	Triangle Shape	Single Luer Lock	AD30TTSS-1/2	0.16mm	0.31mm	12 pcs

Quad Tube All-Metal High Precision Tips

Nickel Plated Brass Luer Lock Hub to Stainless Steel Blunt End Tube



AD Series All Metal Blunt End Tips Quad Tubes

Materials:	Aluminium Hub, Stainless Steel Tube
Attachment:	Luer Lock Thread (Single-Helix)
Flow Pattern:	Straight
Maximum Pressure:	100 PSI
Tube Length:	0.25", 0.50", 1.0"
Tubes:	4
Pack Sizes:	12 Pieces
Details:	Industrial Grade, Silicone Free
Commodity Code:	90289090
Brand:	Adhesive Dispensing Ltd



Our QSS needle series consist of a nickel plated brass luer lock hub welded to quad stainless steel blunt end tubes. This high quality line of dispensing needles is burr-free, and electro-polished shaft for unobstructed and consistent material flow. Dispensing tips are designed to work with standard syringes and fittings. These tips are fully compatible with most low, medium and high viscosity fluids, adhesives, inks, pastes, gels and lubricant. Quad tubes for applications requiring this unique feature.

Enhanced Flow Design for Optimal Performance

The all metal tips feature an advanced tapered internal design, where the stainless steel tubes seamlessly integrate with the hub, minimizing back pressure and flow restriction.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our all metal series quad blunt tips are available in:

- Gauge sizes: 20 to 30 (0.61mm ID to 0.16mm ID)
- Tube lengths: 0.25" (6.35mm), 0.50" (12.7mm), 1.0" (25.4mm)
- Metal construction to protect against aggressive solvents and chemicals

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 12 Pieces
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide



Suitable for dispensing:

- Adhesives & Glues
- Flowable Silicones
- Primers & Activators
- Solder Pastes & Fluxes
- Braze Pastes & Fluxes
- Chemicals
- UV Cure Adhesives
- Solvents
- Lubricants & Grease
- Many more...

Gauge Size	Colour	Connection	No. of Tubes	0.25" Long	0.5 Long	1" Long	Tube ID	Tube OD	Pack Size
20	Silver	Single Luer Lock	3	AD20QSS-1/4	AD20QSS-1/2	AD20QSS-1	0.61mm	0.91mm	12 pcs
21	Silver	Single Luer Lock	3	AD21QSS-1/4	AD21QSS-1/2	AD21QSS-1	0.52mm	0.82mm	12 pcs
22	Silver	Single Luer Lock	3	AD22QSS-1/4	AD22QSS-1/2	AD22QSS-1	0.42mm	0.72mm	12 pcs
23	Silver	Single Luer Lock	3	AD23QSS-1/4	AD23QSS-1/2	AD23QSS-1	0.34mm	0.64mm	12 pcs
24	Silver	Single Luer Lock	3	AD24QSS-1/4	AD24QSS-1/2	AD24QSS-1	0.31mm	0.56mm	12 pcs
25	Silver	Single Luer Lock	3	AD25QSS-1/4	AD25QSS-1/2	AD25QSS-1	0.26mm	0.52mm	12 pcs
26	Silver	Single Luer Lock	3	AD26QSS-1/4	AD26QSS-1/2	AD26QSS-1	0.25mm	0.46mm	12 pcs
27	Silver	Single Luer Lock	3	AD27QSS-1/4	AD27QSS-1/2	AD27QSS-1	0.21mm	0.42mm	12 pcs
28	Silver	Single Luer Lock	3	AD28QSS-1/4	AD28QSS-1/2	AD28QSS-1	0.18mm	0.35mm	12 pcs
30	Silver	Single Luer Lock	3	AD30QSS-1/4	AD30QSS-1/2	AD30QSS-1	0.16mm	0.31mm	12 pcs

Oval Flat End All-Metal High Precision Tips

Nickel Plated Brass Luer Lock Hub to Stainless Steel Blunt End Tube



AD Series All Metal Oval Flat End Tips 0.25" Long Tubes

Materials: Aluminium Hub, Stainless Steel Tube
 Attachment: Luer Lock Thread (Single-Helix)
 Flow Pattern: Straight
 Maximum Pressure: 100 PSI
 Tube Length: 0.25", 0.50", 1.0", 1.5"
 Tubes: 1
 Pack Sizes: 12 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 90289090
 Brand: Adhesive Dispensing Ltd



Our SSVL series consist of a nickel plated brass luer lock hub welded to dual stainless steel blunt end oval shape tubes. This high quality line of dispensing needles is burr-free, and electro-polished shaft for unobstructed and consistent material flow. Dispensing tips are designed to work with standard syringes and fittings. These tips are fully compatible with most low, medium and high viscosity fluids, adhesives, inks, pastes, gels and lubricant. Tube length of 0.25 inch, 0.50", 1.0" or 1.5". Oval flat end tube tips provide a thinner and wider spread deposit of material.

Enhanced Flow Design for Optimal Performance

The all metal tips feature an advanced tapered internal design, where the stainless steel tube seamlessly integrates with the hub, minimizing back pressure and flow restriction.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our all metal series oval blunt tips are available in:

- Gauge sizes: 8 to 26 (3.28mm ID to 0.25mm ID)
- Tube lengths: 0.25" (6.35mm), 0.50" (12.7mm), 1.0" (25.4mm), 1.5" (38.1mm)
- Metal construction to protect against aggressive solvents and chemicals

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 12 Pieces
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide




Suitable for dispensing:

- Adhesives & Glues
- Flowable Silicones
- Primers & Activators
- Solder Pastes & Fluxes
- Braze Pastes & Fluxes
- Chemicals
- UV Cure Adhesives
- Solvents
- Lubricants & Grease
- Many more...

Gauge Size	Colour	Connection	No. of Tubes	0.25" Long	0.5 Long	1" Long	1.5" Long	Tube ID	Tube OD	Pack Size
8	Silver	Single Luer Lock	1	AD8SSVL-1/4	AD8SSVL-1/2	AD8SSVL-1	AD8SSVL-15	3.30mm	4.00mm	12 pcs
10	Silver	Single Luer Lock	1	AD10SSVL-1/4	AD10SSVL-1/2	AD10SSVL-1	AD10SSVL-15	2.80mm	3.50mm	12 pcs
11	Silver	Single Luer Lock	1	AD11SSVL-1/4	AD11SSVL-1/2	AD11SSVL-1	AD11SSVL-15	2.40mm	3.10mm	12 pcs
12	Silver	Single Luer Lock	1	AD12SSVL-1/4	AD12SSVL-1/2	AD12SSVL-1	AD12SSVL-15	2.27mm	2.77mm	12 pcs
13	Silver	Single Luer Lock	1	AD13SSVL-1/4	AD13SSVL-1/2	AD13SSVL-1	AD13SSVL-15	1.94..	2.40mm	12 pcs
14	Silver	Single Luer Lock	1	AD14SSVL-1/4	AD14SSVL-1/2	AD14SSVL-1	AD14SSVL-15	1.64mm	2.10mm	12 pcs
15	Silver	Single Luer Lock	1	AD15SSVL-1/4	AD15SSVL-1/2	AD15SSVL-1	AD15SSVL-15	1.43mm	1.83mm	12 pcs
16	Silver	Single Luer Lock	1	AD16SSVL-1/4	AD16SSVL-1/2	AD16SSVL-1	AD16SSVL-15	1.25mm	1.65mm	12 pcs
17	Silver	Single Luer Lock	1	AD17SSVL-1/4	AD17SSVL-1/2	AD17SSVL-1	AD17SSVL-15	1.11mm	1.29mm	12 pcs
18	Silver	Single Luer Lock	1	AD18SSVL-1/4	AD18SSVL-1/2	AD18SSVL-1	AD18SSVL-15	0.92mm	1.28mm	12 pcs
19	Silver	Single Luer Lock	1	AD19SSVL-1/4	AD19SSVL-1/2	AD19SSVL-1	AD19SSVL-15	0.72mm	1.08mm	12 pcs
20	Silver	Single Luer Lock	1	AD20SSVL-1/4	AD20SSVL-1/2	AD20SSVL-1	AD20SSVL-15	0.61mm	0.91mm	12 pcs
21	Silver	Single Luer Lock	1	AD21SSVL-1/4	AD21SSVL-1/2	AD21SSVL-1	AD21SSVL-15	0.52mm	0.82mm	12 pcs
22	Silver	Single Luer Lock	1	AD22SSVL-1/4	AD22SSVL-1/2	AD22SSVL-1	AD22SSVL-15	0.42mm	0.72mm	12 pcs
23	Silver	Single Luer Lock	1	AD23SSVL-1/4	AD23SSVL-1/2	AD23SSVL-1	AD23SSVL-15	0.34mm	0.64mm	12 pcs
24	Silver	Single Luer Lock	1	AD24SSVL-1/4	AD24SSVL-1/2	AD24SSVL-1	AD24SSVL-15	0.31mm	0.56mm	12 pcs
25	Silver	Single Luer Lock	1	AD25SSVL-1/4	AD25SSVL-1/2	AD25SSVL-1	AD25SSVL-15	0.26mm	0.52mm	12 pcs
26	Silver	Single Luer Lock	1	AD26SSVL-1/4	AD26SSVL-1/2	AD26SSVL-1	AD26SSVL-15	0.25mm	0.46mm	12 pcs

Chamfered End All-Metal High Precision Tips

Nickel Plated Brass Luer Lock Hub to Stainless Steel Blunt End Tube

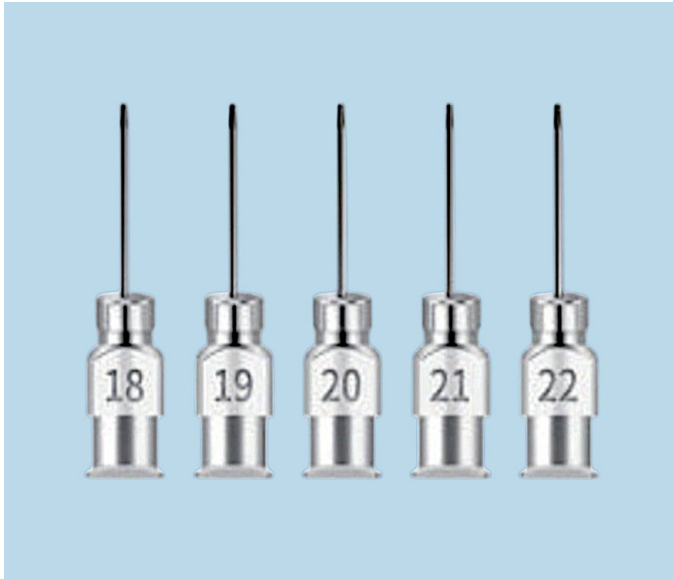

AD Series All Metal Chamfered End Tips 0.

Materials:	Aluminium Hub, Stainless Steel Tube
Attachment:	Luer Lock Thread (Single-Helix)
Flow Pattern:	Straight
Maximum Pressure:	100 PSI
Tube Length:	0.25", 0.50"
Tubes:	1
Pack Sizes:	12 Pieces
Details:	Industrial Grade, Silicone Free
Commodity Code:	90289090
Brand:	Adhesive Dispensing Ltd



Our CHT needle series consist of a nickel plated brass luer lock hub welded to stainless steel chamfered end tube. This high quality line of dispensing needles is burr-free, and electro-polished shaft for unobstructed and consistent material flow. Dispensing tips are designed to work with standard syringes and fittings. These tips are fully compatible with most low, medium and high viscosity fluids, adhesives, inks, pastes, gels and lubricant. Chamfered tube tips are for dispensing solvents, many other liquids as well as difficult to dispense adhesives or materials.

Enhanced Flow Design for Optimal Performance

The all metal tips feature an advanced tapered internal design, where the stainless steel tube seamlessly integrates with the hub, minimizing back pressure and flow restriction.

- ✓ Lower pressure requirement for smooth dispensing with inner hub design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the hub - guaranteeing consistent dispensing


Wide Range of Sizes & Configurations

Our all metal series chamfered end tips are available in:

- Gauge sizes: 18 to 30 (0.92mm ID to 0.16mm ID)
- Tube lengths: 0.25" (6.35mm), 0.50" (12.7mm), 1.0" (25.4mm), 1.5" (38.1mm)
- Metal construction to protect against aggressive solvents and chemicals

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 12 Pieces
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide

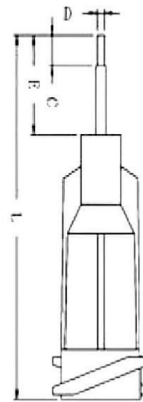

Suitable for dispensing:

- Adhesives & Glues
- Flowable Silicones
- Primers & Activators
- Solder Pastes & Fluxes
- Braze Pastes & Fluxes
- Chemicals
- UV Cure Adhesives
- Solvents
- Lubricants & Grease
- Many more...

Gauge Size	Colour	Connection	No. of Tubes	0.25" Long	0.5 Long	Tube ID	Tube OD	Pack Size
18	Silver	Single Luer Lock	1	CHT18025SS	CHT18050SS	0.92mm	1.28mm	12 pcs
19	Silver	Single Luer Lock	1	CHT19025SS	CHT19050SS	0.72mm	1.08mm	12 pcs
20	Silver	Single Luer Lock	1	CHT20025SS	CHT20050SS	0.61mm	0.91mm	12 pcs
21	Silver	Single Luer Lock	1	CHT21025SS	CHT21050SS	0.52mm	0.82mm	12 pcs
22	Silver	Single Luer Lock	1	CHT22025SS	CHT22050SS	0.42mm	0.72mm	12 pcs
23	Silver	Single Luer Lock	1	CHT23025SS	CHT23050SS	0.34mm	0.64mm	12 pcs
24	Silver	Single Luer Lock	1	CHT24025SS	CHT24050SS	0.31mm	0.56mm	12 pcs
25	Silver	Single Luer Lock	1	CHT25025SS	CHT25050SS	0.26mm	0.52mm	12 pcs
26	Silver	Single Luer Lock	1	CHT26025SS	CHT26050SS	0.25mm	0.46mm	12 pcs
27	Silver	Single Luer Lock	1	CHT27025SS	CHT27050SS	0.21mm	0.42mm	12 pcs
28	Silver	Single Luer Lock	1	CHT28025SS	CHT28050SS	0.18mm	0.25mm	12 pcs
30	Silver	Single Luer Lock	1	CHT30025SS	CHT30050SS	0.16mm	0.31mm	12 pcs

AD Series Standard Smooth Flow Taper Tips

Straight Colour Coded Plastic Luer Lock Dispensing Tip



AD Series Smooth Flow Tapered Tips 1.25" Long

Material:	Polyethylene (HDPE)
Attachment:	Luer Lock Thread (Double-Helix)
Flow Pattern:	Straight
Maximum Pressure:	100 PSI
Total Length:	1.25" - 31.75mm
Pack Sizes:	50, 500 or 1000 Pieces
Details:	Industrial Grade, Silicone Free
Commodity Code:	39269097
Brand:	Adhesive Dispensing Ltd



Our ADTT industrial-grade luer lock tips are silicone-free, ensuring contamination-free dispensing while safely operating at up to 100 PSI fluid pressure. Ideal for handling fluids, pastes, adhesives, lubricants, and solvent-based liquids, they deliver consistent flow and superior accuracy. Polyethylene material is compatible with most assembly fluids and adhesives.

Enhanced Flow Design for Optimal Performance

The AD series tapered tips feature a tapered design, minimizing back pressure and flow restriction and especially useful for handling higher viscosity materials.

- ✓ Lower pressure requirement for smooth dispensing with tapered design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the tip - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our AD series tapered tips are available in:

- Gauge sizes: 8 to 32 (3.50mm ID to 0.10mm ID)
- Industry-standard colour coding for quick identification
- UV-filtered hubs to protect against light exposure

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50, bulk packs of 500 or 1000
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide



Suitable for dispensing:

- Adhesives & Glues
- Silicones & Sealants
- Primers & Activators
- Solder Pastes & Solder Fluxes
- Braze Pastes
- SMT Adhesives
- UV Cure Adhesives
- Paints & Inks
- Lubricants & Grease
- Many more...

For adhesives that are affected by any exposure to UV light, please consider our black coloured tapered tips.

Gauge Size	Colour	Part Code	Connection	Material	Total Length	Outlet ID	Pack Sizes
8	Natural	AD8TT-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	3.50mm	50, 500 or 1000 pcs
10	Pale Green	AD10TT-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	3.00mm	50, 500 or 1000 pcs
11	Light Orange	A11TT-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	2.50mm	50, 500 or 1000 pcs
12	Light Blue	AD12TT-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	2.34mm	50, 500 or 1000 pcs
13	Magenta Red	AD13TT-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	2.00mm	50, 500 or 1000 pcs
14	Olive	AD14TT-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	1.60mm	50, 500 or 1000 pcs
15	Amber	AD15TT-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	1.37mm	50, 500 or 1000 pcs
16	Grey	AD16TT-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	1.22mm	50, 500 or 1000 pcs
18	Green	AD18T-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.84mm	50, 500 or 1000 pcs
20	Pink	AD20TT-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.61mm	50, 500 or 1000 pcs
21	Purple	AD21TT-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.51mm	50, 500 or 1000 pcs
22	Blue	AD22TT-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.41mm	50, 500 or 1000 pcs
23	Dark Orange	AD23TT-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.33mm	50, 500 or 1000 pcs
25	Red	AD25TT-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.25mm	50, 500 or 1000 pcs
26	Pale Orange	AD26TT-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.22mm	50, 500 or 1000 pcs
27	Clear	AD27TT-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.20mm	50, 500 or 1000 pcs
30	Lavender	AD30TT-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.15mm	50, 500 or 1000 pcs
32	Bright Yellow	AD32TT-B	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.10mm	50, 500 or 1000 pcs


TT Series DHUV Smooth Flow Taper Tips

Straight Colour Coded Plastic Luer Lock Dispensing Tip



TT Series Smooth Flow Tapered Tips 1.25" Long

Material:	Polyethylene (HDPE)
Attachment:	Luer Lock Thread (Double-Helix)
Flow Pattern:	Straight
Maximum Pressure:	100 PSI
Total Length:	1.25" - 31.75mm
Pack Sizes:	50, 500 or 1000 Pieces
Details:	Industrial Grade, Silicone Free
Commodity Code:	39269097
Brand:	Techcon



TT industrial-grade luer lock tips are silicone-free, ensuring contamination-free dispensing while safely operating at up to 100 PSI maximum fluid pressure. Ideal for handling fluids, pastes, adhesives, lubricants, and solvent-based liquids, they deliver consistent flow and superior accuracy. Polyethylene plastic material is compatible with most assembly fluids and adhesives.

Enhanced Flow Design for Optimal Performance

The TT series tapered tips feature a tapered design, minimizing back pressure and flow restriction and especially useful for handling higher viscosity materials.

- ✓ Lower pressure requirement for smooth dispensing with tapered design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the tip - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

TT series tapered tips are available in:

- Gauge sizes: 14 to 27 (1.60mm ID to 0.20mm ID)
- Industry-standard colour coding for quick identification
- UV-filtered hubs to protect against light exposure

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50, bulk packs of 500 or 1000
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide

For adhesives that are affected by any exposure to UV light, please consider our black coloured tapered tips.



Suitable for dispensing:

- Adhesives & Glues
- Silicones & Sealants
- Primers & Activators
- Solder Pastes & Solder Fluxes
- Braze Pastes
- SMT Adhesives
- UV Cure Adhesives
- Paints & Inks
- Lubricants & Grease
- Many more...



Colour	Gauge Size	Part Code	Connection	Material	Total Length	Outlet ID	Pack Sizes
Olive	14	TT14-DHUV-PK	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	1.60mm	50 or 1000 pcs
Grey	16	TT16-DHUV-PK	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	1.22mm	50 or 1000 pcs
Green	18	TT18-DHUV-PK	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.84mm	50 or 1000 pcs
Pink	20	TT20-DHUV-PK	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.61mm	50 or 1000 pcs
Blue	22	TT22-DHUV-PK	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.41mm	50 or 1000 pcs
Red	25	TT25-DHUV-PK	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.25mm	50 or 1000 pcs
Clear	27	TT27-DHUV-PK	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.20mm	50 or 1000 pcs

Colour	Gauge Size	Part Code	Connection	Material	Total Length	Outlet ID	Pack Sizes
Olive	14	TT14-RIGID-PK	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	1.60mm	50 or 1000 pcs
Grey	16	TT16-RIGID-PK	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	1.22mm	50 or 1000 pcs
Green	18	TT18-RIGID-PK	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.84mm	50 or 1000 pcs
Pink	20	TT20-RIGID-PK	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.61mm	50 or 1000 pcs
Blue	22	TT22-RIGID-PK	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.41mm	50 or 1000 pcs
Red	25	TT25-RIGID-PK	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.25mm	50 or 1000 pcs
Clear	27	TT27-RIGID-PK	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.20mm	50 or 1000 pcs

AD Series Extended Length Smooth Flow Taper Tips

Straight Colour Coded Plastic Luer Lock Dispensing Tip



AD Series Smooth Flow Tapered Tips 2.36" Long

Material: Polyethylene (HDPE)
 Attachment: Luer Lock Thread (Double-Helix)
 Flow Pattern: Straight
 Maximum Pressure: 100 PSI
 Total Length: 2.36" - 60.0mm
 Pack Sizes: 50 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 39269097
 Brand: Adhesive Dispensing Ltd



Our industrial-grade luer lock tips are silicone-free, ensuring contamination-free dispensing while safely operating at up to 100 PSI fluid pressure. Ideal for handling fluids, pastes, adhesives, lubricants, and solvent-based liquids, they deliver consistent flow and superior accuracy. Polyethylene material is compatible with most assembly fluids and adhesives.

Enhanced Flow Design for Optimal Performance

The AD series tapered tips feature a tapered design, minimizing back pressure and flow restriction and especially useful for handling higher viscosity materials.

- ✓ Lower pressure requirement for smooth dispensing with tapered design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the tip - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our AD series tapered tips are available in:

- Gauge sizes: 10 to 20 (3.0mm ID to 0.61mm ID)
- Industry-standard colour coding for quick identification
- UV-filtered hubs to protect against light exposure

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide

For adhesives that are affected by any exposure to UV light, please consider our black coloured tapered tips.



Suitable for dispensing:

- Adhesives & Glues
- Silicones & Sealants
- Primers & Activators
- Solder Pastes & Solder Fluxes
- Braze Pastes
- SMT Adhesives
- UV Cure Adhesives
- Paints & Inks
- Lubricants & Grease
- Many more...

Part Code	Gauge Size	Colour	Connection	Material	Total Length	Outlet ID	Pack Size
AD10TTL	10	Pale Green	Double-Helix Luer Lock	Polyethylene	2.36" - 60.0mm	3.00mm	50 pcs
AD11TTL	11	Light Orange	Double-Helix Luer Lock	Polyethylene	2.36" - 60.0mm	2.50mm	50 pcs
AD12TTL	12	Light Blue	Double-Helix Luer Lock	Polyethylene	2.36" - 60.0mm	2.34mm	50 pcs
AD13TTL	13	Magenta Red	Double-Helix Luer Lock	Polyethylene	2.36" - 60.0mm	2.00mm	50 pcs
AD14TTL	14	Olive	Double-Helix Luer Lock	Polyethylene	2.36" - 60.0mm	1.60mm	50 pcs
AD15TTL	15	Amber	Double-Helix Luer Lock	Polyethylene	2.36" - 60.0mm	1.37mm	50 pcs
AD16TTL	16	Grey	Double-Helix Luer Lock	Polyethylene	2.36" - 60.0mm	1.22mm	50 pcs
AD18TTL	18	Green	Double-Helix Luer Lock	Polyethylene	2.36" - 60.0mm	0.84mm	50 pcs
AD20TTL	20	Pink	Double-Helix Luer Lock	Polyethylene	2.36" - 60.0mm	0.61mm	50 pcs



For the full website range, click [here](#)

AD Series Angled Bend Smooth Flow Taper Tips

30° Colour Coded Plastic Luer Lock Dispensing Tip



AD Series Smooth Flow Angled Tapered Tips 1.25" Long

Material: Polyethylene (HDPE)
 Attachment: Luer Lock Thread (Double-Helix)
 Flow Pattern: 30° Bend
 Maximum Pressure: 100 PSI
 Total Length: 1.25" - 31.75mm
 Pack Sizes: 50 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 39269097
 Brand: Adhesive Dispensing Ltd



Our industrial-grade luer lock tips are silicone-free, ensuring contamination-free dispensing while safely operating at up to 100 PSI fluid pressure. Ideal for handling fluids, pastes, adhesives, lubricants, and solvent-based liquids, they deliver consistent flow and superior accuracy. Polyethylene material is compatible with most assembly fluids and adhesives. 30° bend for dispensing into hard to reach places.

Enhanced Flow Design for Optimal Performance

The AD series tapered tips feature a tapered design, minimizing back pressure and flow restriction and especially useful for handling higher viscosity materials.

- ✓ Lower pressure requirement for smooth dispensing with tapered design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the tip - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our AD series tapered tips are available in:

- Gauge sizes: 8 to 30 (3.50mm ID to 0.16mm ID)
- Industry-standard colour coding for quick identification
- UV-filtered hubs to protect against light exposure

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide

For adhesives that are affected by any exposure to UV light, please consider our black coloured tapered tips.



Suitable for dispensing:

- Adhesives & Glues
- Silicones & Sealants
- Primers & Activators
- Solder Pastes & Solder Fluxes
- Braze Pastes
- SMT Adhesives
- UV Cure Adhesives
- Paints & Inks
- Lubricants & Grease
- Many more...

Part Code	Gauge Size	Colour	Flow Pattern	Connection	Material	Total Length	Outlet ID	Pack Size
AD8TTA	8	Yellow	30° Bend	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	3.50mm	50 pcs
AD10TTA	10	Light Green	30° Bend	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	3.00mm	50 pcs
AD11TTA	11	Light Orange	30° Bend	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	2.50mm	50 pcs
AD12TTA	12	Light Blue	30° Bend	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	2.34mm	50 pcs
AD13TTA	13	Magenta Red	30° Bend	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	2.00mm	50 pcs
AD14TTA	14	Olive	30° Bend	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	1.60mm	50 pcs
AD15TTA	15	Amber	30° Bend	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	1.37mm	50 pcs
AD16TTA	16	Grey	30° Bend	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	1.22mm	50 pcs
AD18TTA	18	Green	30° Bend	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.84mm	50 pcs
AD20TTA	20	Pink	30° Bend	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.61mm	50 pcs
AD21TTA	21	Purple	30° Bend	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.51mm	50 pcs
AD22TTA	22	Blue	30° Bend	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.41mm	50 pcs
AD23TTA	23	Orange	30° Bend	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.33mm	50 pcs
AD25TTA	25	Red	30° Bend	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.25mm	50 pcs
AD27TTA	27	Clear	30° Bend	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.20mm	50 pcs
AD27TTAB	27	Black	30° Bend	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.20mm	50 pcs
AD30TTA	30	Natural	30° Bend	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.16mm	50 pcs

AD Series UV Block Smooth Flow Taper Tips

Straight Black Plastic Luer Lock Dispensing Tip



AD Series Smooth Flow UV Tapered Tips 1.25" Long

Material:	Polyethylene (HDPE)
Attachment:	Luer Lock Thread (Double-Helix)
Flow Pattern:	Straight
Colour:	Black
Maximum Pressure:	100 PSI
Total Length:	1.25" - 31.75mm
Pack Sizes:	50 Pieces
Details:	Industrial Grade, Silicone Free
Commodity Code:	39269097
Brand:	Adhesive Dispensing Ltd



Our UV industrial-grade luer lock tips are silicone-free, ensuring contamination-free dispensing while safely operating at up to 100 PSI fluid pressure. Ideal for handling fluids, pastes, adhesives, lubricants, and solvent-based liquids, they deliver consistent flow and superior accuracy. Polyethylene material is compatible with most assembly fluids and adhesives. Black opaque UV block protects all light sensitive and UV cure adhesives to ensure no affect whilst being dispensed.

Enhanced Flow Design for Optimal Performance

The UV series tapered tips feature a tapered design, minimizing back pressure and flow restriction and especially useful for handling higher viscosity materials.

- ✓ Lower pressure requirement for smooth dispensing with tapered design
- ✓ Unobstructed material flow ensures efficiency and precision
- ✓ No protrusions inside the tip - guaranteeing consistent dispensing

Wide Range of Sizes & Configurations

Our AD series UV tapered tips are available in:

- Gauge sizes: 14 to 30 (1.60mm ID to 0.10mm ID)
- Industry-standard colour coding for quick identification
- UV-filtered hubs to protect against light exposure

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide

These tips are suitable for UV cure adhesives and light sensitive adhesives but can be used with standard materials.

Use ESD safe black tips for electronic PCB applications.



Suitable for dispensing:

- Adhesives & Glues
- Silicones & Sealants
- Primers & Activators
- Solder Pastes & Solder Fluxes
- Braze Pastes
- SMT Adhesives
- UV Cure Adhesives
- Paints & Inks
- Lubricants & Grease
- Many more...

Part Code	Gauge Size	Colour	Connection	Material	Total Length	Outlet ID	Pack Size
TT14-UV	14	Black	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	1.60mm	50 pcs
TT16-UV	16	Black	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	1.22mm	50 pcs
TT18-UV	18	Black	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.84mm	50 pcs
TT20-UV	20	Black	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.61mm	50 pcs
TT22-UV	22	Black	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.41mm	50 pcs
TT25-UV	25	Black	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.25mm	50 pcs
TT27-UV	27	Black	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.20mm	50 pcs
TT30-UV	30	Black	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.15mm	50 pcs



For the full website range, click [here](#)

AD Series ESD Safe Smooth Flow Taper Tips

Straight Black Plastic Luer Lock Dispensing Tip



AD Series Smooth Flow ESD Tapered Tips 1.25" Long

Material: Polyethylene (HDPE)
 Attachment: Luer Lock Thread (Double-Helix)
 Flow Pattern: Straight
 Colour: Black
 Maximum Pressure: 100 PSI
 Total Length: 1.25" - 31.75mm
 Pack Sizes: 50 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 39269097
 Brand: Adhesive Dispensing Ltd



Our ESD industrial-grade luer lock tips are silicone-free, ensuring contamination-free dispensing while safely operating at up to 100 PSI fluid pressure. Ideal for handling fluids, pastes, adhesives, lubricants, and solvent-based liquids, they deliver consistent flow and superior accuracy. Polyethylene material is compatible with most assembly fluids and adhesives. Additive in the plastic to prevent any static build-up ESD and avoids damage to sensitive electronic components.

Enhanced Flow Design for Optimal Performance

- ✓ ESD Safe: Additive in the plastic to prevent static build-up ESD and avoids damage to sensitive electronic components.
- ✓ UV Block Black Colour – Dispense UV cure and light sensitive adhesives without any affect.
- ✓ Smooth Flow Tapered Design – Ideal for high-viscosity materials, enabling efficient dispensing at lower pressures.
- ✓ Safety Locking Double Helix Hub – Secure, leak-free attachment with Luer lock compatibility.
- ✓ Versatile Application – Compatible with syringe barrels, cartridges (using a tip adapter), and metering valves.
- ✓ Industrial Grade & Silicone-Free – Ensuring clean and precise dispensing for manufacturing and assembly applications.
- ✓ Reliable Performance – Designed to maintain consistent flow rates for all fluid types.
- ✓ No protrusions inside the tip - guaranteeing consistent dispensing
- ✓ Lower pressure requirement for smooth dispensing with tapered design
- ✓ Unobstructed material flow ensures efficiency and precision

Wide Range of Sizes & Configurations

Our AD series ESD tapered tips are available in:

- Gauge sizes: 14 to 27 (1.60mm ID to 0.20mm ID)
- Industry-standard colour coding for quick identification
- UV-filtered hubs to protect against light exposure

Reliable Supply & Fast Global Delivery

- ✓ Pack sizes: Securely sealed boxes of 50
- ✓ Batch-coded for full traceability
- ✓ Available for fast delivery worldwide

These tips are suitable for UV cure adhesives and light sensitive adhesives but can be used with standard materials.



Suitable for dispensing:
 Adhesives & Glues
 Silicones & Sealants
 Primers & Activators
 Solder Pastes & Solder Fluxes
 Braze Pastes
 SMT Adhesives
 UV Cure Adhesives
 Paints & Inks
 Lubricants & Grease
 Many more...

Part Code	Gauge Size	Colour	Connection	Material	Total Length	Outlet ID	Pack Size
ADTT14-ESD	14	Black	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	1.60mm	50 pcs
ADTT16-ESD	16	Black	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	1.22mm	50 pcs
ADTT18-ESD	18	Black	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.84mm	50 pcs
ADTT20-ESD	20	Black	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.61mm	50 pcs
ADTT22-ESD	22	Black	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.41mm	50 pcs
ADTT25-ESD	25	Black	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.25mm	50 pcs
ADTT27-ESD	27	Black	Double-Helix Luer Lock	Polyethylene	1.25" - 31.75mm	0.20mm	50 pcs



For the full website range, click [here](#)

MMT High Precision Taper Tips

Straight Stainless Steel Luer Lock Dispensing Tip



MMT Series Smooth Flow Tapered Tips Stainless Steel

Material: Stainless Steel
 Attachment: Luer Lock Thread (Single-Helix)
 Flow Pattern: Straight
 Maximum Pressure: 100 PSI
 Total Length: 0.72" - 18.25mm
 Pack Size: Per Tip
 Details: Industrial Grade, Silicone Free
 Commodity Code: 90289090
 Brand: Adhesive Dispensing Ltd



Optimise precision and efficiency with our industrial-grade stainless-steel tapered dispensing tips. Designed for seamless use with syringe barrels, dispense bottles, valves, and robots. Built for reliability, all tips are certified silicone-free and safe for air pressures up to 100 PSI. The luer-lock single (MMT) secure attachment ensures a twist-on, leak-free dispensing performance.

Dispense nozzles for high accuracy micro-dot dispensing. MMT tapered tip nozzles have a super low resistance molecular fluid flow. Significant cost savings over inferior nozzles without sacrificing placement precision or deposition accuracy.

A primary design feature of this unique luer lock dispensing nozzle is the stream-line conical fluid path which delivers substantially higher fluid flow rates and lower dispense pump back pressures, resulting in improved dispensing accuracy and component life.

The design also employs very thin rigid walls offering a larger I.D. fluid path which enables the use of smaller O.D. nozzles without sacrificing dispense rates. Additionally, the thin walls further enhance the accuracy and definition of dots, lines, or special patterns while at the same time dramatically reducing fluid stringing or tailing tendencies.

Key Features:

- ✓ Smooth Flow Tapered Design – Ideal for high-viscosity materials, enabling efficient dispensing at lower pressures.
- ✓ Safety Locking Hub – Secure, leak-free attachment with Luer-lock compatibility.
- ✓ Versatile Application – Compatible with syringe barrels, cartridges (using a tip adapter), and metering valves.
- ✓ Industrial Grade & Silicone-Free – Ensuring clean and precise dispensing for manufacturing and assembly applications.
- ✓ Reliable Performance. Designed to maintain consistent flow rates for all fluid types.
- ✓ Stainless Steel Quality. Compatible with most materials including UV cure adhesives.
- ✓ Sealed Boxes. Ensures tips are received dust free and easy to stack.
- ✓ Competitive Pricing. We constantly monitor our competitors to ensure our products offer our customers the best value.



Suitable for dispensing:

- SMT Adhesives
- Silicones & Sealants
- Primers & Activators
- Solder Pastes & Solder Fluxes
- Braze Pastes
- UV Cure Adhesives
- Paints & Inks
- Lubricants & Grease
- Many more...

Part Code	Colour	Attachment	Material	Total Length	Outlet ID	Outlet OD	Pack Size
MMT015	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	0.15mm	0.23mm	1 Piece
MMT018	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	0.18mm	0.27mm	1 Piece
MMT020	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	0.20mm	0.28mm	1 Piece
MMT023	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	0.23mm	0.29mm	1 Piece
MMT025	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	0.25mm	0.30mm	1 Piece
MMT030	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	0.30mm	0.35mm	1 Piece
MMT035	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	0.35mm	0.40mm	1 Piece
MMT040	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	0.40mm	0.50mm	1 Piece
MMT045	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	0.45mm	0.55mm	1 Piece
MMT050	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	0.50mm	0.60mm	1 Piece
MMT060	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	0.60mm	0.70mm	1 Piece
MMT070	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	0.70mm	0.80mm	1 Piece
MMT080	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	0.80mm	0.90mm	1 Piece
MMT090	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	0.90mm	1.10mm	1 Piece
MMT100	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	1.00mm	1.30mm	1 Piece
MMT110	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	1.10mm	1.40mm	1 Piece
MMT120	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	1.20mm	1.50mm	1 Piece
MMT130	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	1.30mm	1.70mm	1 Piece
MMT140	Silver	Single Helix Luer Lock	Stainless Steel	18.25mm	1.40mm	1.80mm	1 Piece

MMTL High Precision Taper Tips

Straight Stainless Steel Luer Lock Dispensing Tip



MMTL Series Smooth Flow Tapered Tips Stainless Steel

Material:	Stainless Steel
Attachment:	Luer Lock Thread (Double-Helix)
Flow Pattern:	Straight
Maximum Pressure:	100 PSI
Total Length:	0.72" - 18.25mm
Pack Size:	Per Tip
Details:	Industrial Grade, Silicone Free
Commodity Code:	90289090
Brand:	Adhesive Dispensing Ltd



Optimise precision and efficiency with our industrial-grade stainless-steel tapered dispensing tips. Designed for seamless use with syringe barrels, dispense bottles, valves, and robots. Built for reliability, all tips are certified silicone-free and safe for air pressures up to 100 PSI. The luer-lock double helix (MMTL) secure attachment ensures a twist-on, leak-free dispensing performance.

Dispense nozzles for high accuracy micro-dot dispensing. MMTL tapered tip nozzles have a super low resistance molecular fluid flow. Significant cost savings over inferior nozzles without sacrificing placement precision or deposition accuracy.

A primary design feature of this unique luer lock dispensing nozzle is the stream-line conical fluid path which delivers substantially higher fluid flow rates and lower dispense pump back pressures, resulting in improved dispensing accuracy and component life.

The design also employs very thin rigid walls offering a larger I.D. fluid path which enables the use of smaller O.D. nozzles without sacrificing dispense rates. Additionally, the thin walls further enhance the accuracy and definition of dots, lines, or special patterns while at the same time dramatically reducing fluid stringing or tailing tendencies.

Key Features:

- ✓ Smooth Flow Tapered Design – Ideal for high-viscosity materials, enabling efficient dispensing at lower pressures.
- ✓ Safety Locking Double Helix Hub – Secure, leak-free attachment with Luer-lock compatibility.
- ✓ Versatile Application – Compatible with syringe barrels, cartridges (using a tip adapter), and metering valves.
- ✓ Industrial Grade & Silicone-Free – Ensuring clean and precise dispensing for manufacturing and assembly applications.
- ✓ Reliable Performance. Designed to maintain consistent flow rates for all fluid types.
- ✓ Stainless Steel Quality. Compatible with most materials including UV cure adhesives.
- ✓ Sealed Boxes. Ensures tips are received dust free and easy to stack.



Suitable for dispensing:
 SMT Adhesives
 Silicones & Sealants
 Primers & Activators
 Solder Pastes & Solder Fluxes
 UV Cure Adhesives
 Paints & Inks
 Lubricants & Grease

Part Code	Colour	Attachment	Material	Total Length	Outlet ID	Outlet OD	Pack Size
MMTL010	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	0.10mm	0.18mm	1 Piece
MMTL125	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	0.125mm	0.21mm	1 Piece
MMTL015	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	0.15mm	0.23mm	1 Piece
MMTL018	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	0.18mm	0.27mm	1 Piece
MMTL020	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	0.20mm	0.28mm	1 Piece
MMTL023	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	0.23mm	0.29mm	1 Piece
MMTL025	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	0.25mm	0.30mm	1 Piece
MMTL030	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	0.30mm	0.35mm	1 Piece
MMTL035	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	0.35mm	0.40mm	1 Piece
MMTL045	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	0.45mm	0.55mm	1 Piece
MMTL050	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	0.50mm	0.60mm	1 Piece
MMTL060	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	0.60mm	0.70mm	1 Piece
MMTL070	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	0.70mm	0.80mm	1 Piece
MMTL080	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	0.80mm	0.90mm	1 Piece
MMTL090	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	0.90mm	1.10mm	1 Piece
MMTL100	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	1.00mm	1.30mm	1 Piece
MMTL110	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	1.10mm	1.40mm	1 Piece
MMTL120	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	1.20mm	1.50mm	1 Piece
MMTL130	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	1.30mm	1.70mm	1 Piece
MMTL140	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	1.40mm	1.80mm	1 Piece
MMTL150	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	1.50mm	1.90mm	1 Piece
MMTL160	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	1.60mm	2.00mm	1 Piece
MMTL170	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	1.70mm	2.10mm	1 Piece
MMTL180	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	1.80mm	2.20mm	1 Piece
MMTL190	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	1.90mm	2.30mm	1 Piece
MMTL200	Silver	Double Helix Luer Lock	Stainless Steel	18.25mm	2.00mm	2.40mm	1 Piece


Flexible PTFE Tube Tips

Colour Coded Plastic Luer Lock Hub to Flexible Soft Teflon Tube



PTFE Series Flexible Tips

Material:	Polypropylene, PTFE
Tube Length:	0.25", 0.5", 1", 1.5", 2", 3", 4", 5", 6"
Attachment:	Luer Lock Thread (Double-Helix)
Flow Pattern:	Straight
Maximum Pressure:	100 PSI
Pack Size:	50 Pieces
Details:	Industrial Grade, Silicone Free
Commodity Code:	39269097
Brand:	Adhesive Dispensing Ltd



Our PTFE dispensing tips feature a flexible, transparent tube bonded to a threaded, colour-coded polypropylene luer lock hub. This durable tip connection ensures secure attachment to syringe barrels or dispensing valves, even under high pressure environments - up to 100 psi.

Engineered for Cyanoacrylates and Reactive Fluids

Ideal for low viscosity adhesives, PTFE tips are specially designed to prevent clogging and crystallisation when dispensing Cyanoacrylates and other reactive liquids. The combination of soft PTFE tubing and polypropylene hubs resists chemical interaction, delivering consistent flow and extended tip life compared to standard needle-style dispensers.

Clarity and Precision in Every Dispense

The transparent PTFE tube allows visual monitoring of fluid flow, while the soft tubing prevents scratching on sensitive substrates. Tips can be cut to a custom length for optimized control and precision across a wide range of dispensing tasks.

Universal Compatibility Across Syringe Systems

Our PTFE tips are compatible with standard luer lock and luer slip syringe barrels and fittings. They perform reliably with a broad spectrum of fluids including instant adhesives, inks, primers, and activators. Certified silicone-free, these tips maintain purity and prevent contamination during sensitive dispensing applications.

Key Features:

- ✓ PTFE Tube - Stops instant glues from rapid curing in the tip.
- ✓ Safety Locking Double Helix Hub – Secure, leak-free attachment with Luer-lock compatibility.
- ✓ Versatile Application – Compatible with syringe barrels, cartridges (using a tip adapter), and metering valves.
- ✓ Industrial Grade & Silicone-Free – Ensuring clean and precise dispensing for manufacturing and assembly applications.
- ✓ Reliable Performance. Designed to maintain consistent flow rates for all fluid types.
- ✓ Vast Range of Lengths. Can be custom made to any tube length.
- ✓ Sealed Boxes of 50 Pieces. Ensures tips are received dust free and easy to stack.

The PTFE tip range uses a double-helix luer lock thread attachment for a leak-free connection.



Suitable for dispensing:
 Cyanoacrylate Adhesives
 Primers & Activators
 Flowable Silicones
 UV Cure Adhesives
 Marking Paints & Inks
 Lubricants & Grease

Gauge	Size	Hub Colour	0.25" Long	0.5 Long	1" Long	1.5" Long	2" Long	3" Long	4" Long	5" Long	6" Long	Tube ID	Tube OD
12		Blue	ADTF12-1/4	ADTF12-1/2	ADTF12-1	ADTF12-15	ADTF12-2	ADTF12-3	ADTF12-4	ADTF12-5	ADTF12-6	2.16mm	2.76mm
13		Magenta	ADTF13-1/4	ADTF13-1/2	ADTF13-1	ADTF13-15	ADTF13-2	ADTF13-3	ADTF13-4	ADTF13-5	ADTF13-6	1.68mm	2.23mm
14		Dark Green	ADTF14-1/4	ADTF14-1/2	ADTF14-1	ADTF14-15	ADTF14-2	ADTF14-3	ADTF14-4	ADTF14-5	ADTF14-6	1.67mm	2.08mm
15		Olive	ADTF15-1/4	ADTF15-1/2	ADTF15-1	ADTF15-15	ADTF15-2	ADTF15-3	ADTF15-4	ADTF15-5	ADTF15-6	1.50mm	2.05mm
16		Amber	ADTF16-1/4	ADTF16-1/2	ADTF16-1	ADTF16-15	ADTF16-2	ADTF16-3	ADTF16-4	ADTF16-5	ADTF16-6	1.34mm	1.94mm
17		Dark Grey	ADTF17-1/4	ADTF17-1/2	ADTF17-1	ADTF17-15	ADTF17-2	ADTF17-3	ADTF17-4	ADTF17-5	ADTF17-6	1.19mm	1.79mm
18		Light Amber	ADTF18-1/4	ADTF18-1/2	ADTF18-1	ADTF18-15	ADTF18-2	ADTF18-3	ADTF18-4	ADTF18-5	ADTF18-6	1.07mm	1.67mm
19		Light Brown	ADTF19-1/4	ADTF19-1/2	ADTF19-1	ADTF19-15	ADTF19-2	ADTF19-3	ADTF19-4	ADTF19-5	ADTF19-6	0.96mm	1.56mm
20		Brown	ADTF20-1/4	ADTF20-1/2	ADTF20-1	ADTF20-15	ADTF20-2	ADTF20-3	ADTF20-4	ADTF20-5	ADTF20-6	0.86mm	1.46mm
21		Dark Brown	ADTF21-1/4	ADTF21-1/2	ADTF21-1	ADTF21-15	ADTF21-2	ADTF21-3	ADTF21-4	ADTF21-5	ADTF21-6	0.81mm	1.31mm
22		Green	ADTF22-1/4	ADTF22-1/2	ADTF22-1	ADTF22-15	ADTF22-2	ADTF22-3	ADTF22-4	ADTF22-5	ADTF22-6	0.71mm	1.21mm
23		Brown	ADTF23-1/4	ADTF23-1/2	ADTF23-1	ADTF23-15	ADTF23-2	ADTF23-3	ADTF23-4	ADTF23-5	ADTF23-6	0.66mm	1.16mm
24		Purple	ADTF24-1/4	ADTF24-1/2	ADTF24-1	ADTF24-15	ADTF24-2	ADTF24-3	ADTF24-4	ADTF24-5	ADTF24-6	0.56mm	1.06mm
26		Pink	ADTF26-1/4	ADTF26-1/2	ADTF26-1	ADTF26-15	ADTF26-2	ADTF26-3	ADTF26-4	ADTF26-5	ADTF26-6	0.46mm	0.86mm
28		Blue	ADTF28-1/4	ADTF28-1/2	ADTF28-1	ADTF28-15	ADTF28-2	ADTF28-3	ADTF28-4	ADTF28-5	ADTF28-6	0.38mm	0.78mm
30		Orange	ADTF30-1/4	ADTF30-1/2	ADTF30-1	ADTF30-15	ADTF30-2	ADTF30-3	ADTF30-4	ADTF30-5	ADTF30-6	0.31mm	0.63mm

PTFE Lined Crimped Tips

Colour Coded Plastic Luer Lock Hub to Soft Teflon Tube Inside Tip



PTFE Series Crimped Tube Tips Straight or Angled

Material: Polypropylene, PTFE, Stainless Steel
 Tube Lengths: 0.25" - 6.35mm, 0.50" - 12.70mm, 1.0" - 25.4mm
 Attachment: Luer Lock Thread (Double-Helix)
 Flow Pattern: Straight Version or 45° Bend Version
 Maximum Pressure: 100 PSI
 Pack Size: 50 Pieces or 1000 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 90289090
 Brand: Adhesive Dispensing Ltd



Our PTFE lined crimped tube dispensing tips feature a rigid, stainless steel tube bonded to a threaded, colour-coded polypropylene luer lock hub. The PTFE tube is crimped inside the stainless steel tube. This provides a durable tip connection ensures secure attachment to syringe barrels or dispensing valves, even under high pressure environments - up to 100 psi.

Engineered for Cyanoacrylates and Reactive Fluids

Ideal for low viscosity adhesives, PTFE crimped tips are specially designed to prevent clogging and crystallisation when dispensing Cyanoacrylates and other reactive liquids. The combination of soft PTFE tubing and polypropylene hubs resists chemical interaction, delivering consistent flow and extended tip life compared to standard needle-style dispensers.

Precision in Every Dispense

The PTFE soft tubing prevents scratching on sensitive substrates. The PTFE tube protrudes 1/8" out from the end of the stainless steel tube.

Universal Compatibility Across Syringe Systems

Our PTFE crimped tips are compatible with standard luer lock and luer slip syringe barrels and fittings. They perform reliably with a broad spectrum of fluids including instant adhesives, inks, primers, and activators. Certified silicone-free, these tips maintain purity and prevent contamination during sensitive dispensing applications.

Key Features:

- ✓ PTFE Crimped Tube – Stops instant glues from rapid curing in the tip.
- ✓ Safety Locking Double Helix Hub – Secure, leak-free attachment with Luer-lock compatibility.
- ✓ Versatile Application – Compatible with syringe barrels, cartridges (using a tip adapter), and metering valves.
- ✓ Industrial Grade & Silicone-Free – Ensuring clean and precise dispensing for manufacturing and assembly applications.
- ✓ Reliable Performance. Designed to maintain consistent flow rates for all fluid types.
- ✓ A Range of Lengths. 0.25", 0.50", 1.0", 1.0", 1.5"
- ✓ Sealed Boxes. Ensures tips are received dust free and easy to stack.

Suitable for dispensing:

- Cyanoacrylate Adhesives
- Primers & Activators
- Flowable Silicones
- UV Cure Adhesives
- Marking Paints & Inks
- Lubricants & Grease



The PTFE lined tip range uses a double-helix luer lock thread attachment for a leak-free connection

ADL brand TLC version



Gauge Size	Hub Colour	Connection	Flow Pattern	0.25" Long	0.5 Long	1.0" Long	Tube ID	Pack Size
14	Olive	Double-Helix Luer Lock	Straight	5114TLC-1/4	5114TLC-1/2	5114TLC-1	1.40mm	50 pcs or 1000 pcs
21	Grey	Double-Helix Luer Lock	Straight	5121TLC-1/4	5121TLC-1/2	5121TLC-1	0.51mm	50 pcs or 1000 pcs
25	Pink	Double-Helix Luer Lock	Straight	5125TLC-1/4	5125TLC-1/2	5125TLC-1	0.30mm	50 pcs or 1000 pcs
27	Red	Double-Helix Luer Lock	Straight	5127TLC-1/4	5127TLC-1/2	5127TLC-1	0.20mm	50 pcs or 1000 pcs

Gauge Size	Hub Colour	Connection	Flow Pattern	0.5 Long	1.0" Long	1.5" Long	Tube ID	Pack Size
14	Olive	Double-Helix Luer Lock	45° Bend	5114TLCS-45	5114TLC-1-45	5114TLC-15-45	1.40mm	50 pcs or 1000 pcs
21	Grey	Double-Helix Luer Lock	45° Bend	5121TLCS-45	5121TLC-1-45	5121TLC-15-45	0.51mm	50 pcs or 1000 pcs
25	Pink	Double-Helix Luer Lock	45° Bend	5125TLCS-45	5125TLC-1-45	5125TLC-15-45	0.30mm	50 pcs or 1000 pcs
27	Red	Double-Helix Luer Lock	45° Bend	5127TLCS-45	5127TLC-1-45	5127TLC-15-45	0.20mm	50 pcs or 1000 pcs

TECHCON brand TLC version



Gauge Size	Hub Colour	Connection	Flow Pattern	0.5 Long	1.0" Long	1.5" Long	Tube ID	Pack Size
21	Grey	Double-Helix Luer Lock	Straight	5121TLCS-45	5121TLC-1-45	5121TLC-15-45	0.51mm	50 pcs or 1000 pcs
25	Pink	Double-Helix Luer Lock	Straight	5125TLCS-45	5125TLC-1-45	5125TLC-15-45	0.30mm	50 pcs or 1000 pcs

For the full website range, click [here](#)

Flexible Polypro Tube Tips

Colour Coded Plastic Luer Lock Hub to Flexible Soft Polypropylene Tube



Polypro Series Flexible Tips 0.25" Long

Material: Polypropylene
 Tube Lengths: 0.25", 0.5", 1", 1.5", 2"
 Attachment: Luer Lock Thread (Double-Helix)
 Flow Pattern: Straight
 Maximum Pressure: 100 PSI
 Pack Size: 50 Pieces or 1000 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 39269097
 Brand: Adhesive Dispensing Ltd



Our Polypro dispensing tips feature a flexible, white tube bonded to a threaded, colour-coded polypropylene luer lock hub. This versatile tip connection ensures secure attachment to syringe barrels or dispensing valves, even under high pressure environments - up to 100 psi.

Engineered for Cyanoacrylates and Reactive Fluids

Ideal for low viscosity adhesives, Polypro tips are specially designed to prevent clogging and crystallisation when dispensing Cyanoacrylates and other reactive liquids. The combination of soft tubing and polypropylene hubs resists chemical interaction, delivering consistent flow and extended tip life compared to standard needle-style dispensers.

Precision in Every Dispense

The soft tubing prevents scratching on sensitive substrates. Tips can be cut to a custom length for optimized control and precision across a wide range of dispensing tasks.

Universal Compatibility Across Syringe Systems

Our polypro tips are compatible with standard luer lock and luer slip syringe barrels and fittings. They perform reliably with a broad spectrum of fluids including instant adhesives, inks, primers, and activators. Certified silicone-free, these tips maintain purity and prevent contamination during sensitive dispensing applications.

Key Features:

- ✓ Polypro Tube – Stops instant glues from rapid curing in the tip.
- ✓ Safety Locking Double Helix Hub – Secure, leak-free attachment with Luer-lock compatibility.
- ✓ Versatile Application – Compatible with syringe barrels, cartridges (using a tip adapter), and metering valves.
- ✓ Industrial Grade & Silicone-Free – Ensuring clean and precise dispensing for manufacturing and assembly applications.
- ✓ Reliable Performance. Designed to maintain consistent flow rates for all fluid types.
- ✓ Vast Range of Lengths. From 0.25" to 2".
- ✓ Sealed Boxes. Ensures tips are received dust free and easy to stack.

The Polypro tip range uses a double-helix luer lock thread attachment for a leak-free connection.




Suitable for dispensing:
 Cyanoacrylate Adhesives
 Primers & Activators
 Flowable Silicones
 UV Cure Adhesives
 Marking Paints & Inks
 Lubricants & Grease

Gauge Size	Hub Colour	Connection	0.25" Long	0.5 Long	1" Long	1.5" Long	2" Long	Tube ID	Tube OD	Pack Size
14	Olive	Double-Helix Luer Lock	AD3114PP-1/4	AD3114PP-1/2	AD3114PP-1	AD3114PP-15	AD3114PP-2	1.60mm	1.80mm	50 or 1000 pcs
15	Amber	Double-Helix Luer Lock	AD3115PP-1/4	AD3115PP-1/2	AD3115PP-1	AD3115PP-15	AD3115PP-2	1.35mm	1.65mm	50 or 1000 pcs
16	Grey	Double-Helix Luer Lock	AD3116PP-1/4	AD3116PP-1/2	AD3116PP-1	AD3116PP-15	AD3116PP-2	1.19mm	1.55mm	50 or 1000 pcs
17	Light Brown	Double-Helix Luer Lock	AD3117PP-1/4	AD3117PP-1/2	AD3117PP-1	AD3117PP-15	AD3117PP-2	1.05mm	1.45mm	50 or 1000 pcs
18	Green	Double-Helix Luer Lock	AD3118PP-1/4	AD3118PP-1/2	AD3118PP-1	AD3118PP-15	AD3118PP-2	0.84mm	1.20mm	50 or 1000 pcs
19	Brown	Double-Helix Luer Lock	AD3119PP-1/4	AD3119PP-1/2	AD3119PP-1	AD3119PP-15	AD3119PP-2	0.70mm	1.10mm	50 or 1000 pcs
20	Pink	Double-Helix Luer Lock	AD3120PP-1/4	AD3120PP-1/2	AD3120PP-1	AD3120PP-15	AD3120PP-2	0.60mm	0.90mm	50 or 1000 pcs
21	Purple	Double-Helix Luer Lock	AD3121PP-1/4	AD3121PP-1/2	AD3121PP-1	AD3121PP-15	AD3121PP-2	0.51mm	0.81mm	50 or 1000 pcs
22	Blue	Double-Helix Luer Lock	AD3122PP-1/4	AD3122PP-1/2	AD3122PP-1	AD3122PP-15	AD3122PP-2	0.41mm	0.71mm	50 or 1000 pcs
23	Orange	Double-Helix Luer Lock	AD3123PP-1/4	AD3123PP-1/2	AD3123PP-1	AD3123PP-15	AD3123PP-2	0.31mm	0.63mm	50 or 1000 pcs
25	Red	Double-Helix Luer Lock	AD3125PP-1/4	AD3125PP-1/2	AD3125PP-1	AD3125PP-15	AD3125PP-2	0.25mm	0.41mm	50 or 1000 pcs
27	Light Red	Double-Helix Luer Lock	AD3127PP-1/4	AD3127PP-1/2	AD3127PP-1	AD3127PP-15	AD3127PP-2	0.21mm	0.41mm	50 or 1000 pcs

Flexible Tube TSP Polypropylene Tips

Plastic Luer Lock Hub to Flexible Soft Polypropylene Tube

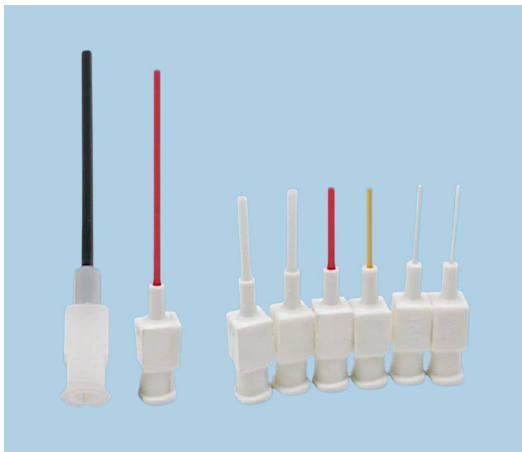

TSP Polypro Series Flexible Tips

Material: Polypropylene
 Tube Lengths: 0.50" - 12.7mm, 1" - 25.4mm, 1.5" 38.1mm, 2.0" - 50.8mm
 Attachment: Luer Lock Thread (Single-Helix)
 Maximum Pressure: 100 PSI
 Pack Sizes: 50 Pieces or 500 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 39269097



TSP Polypro dispensing tips feature a flexible tube bonded to a threaded, polypropylene luer lock hub. This versatile tip connection ensures secure attachment to syringe barrels or dispensing valves, even under high pressure environments - up to 100 psi.

Engineered for Cyanoacrylates and Reactive Fluids

Ideal for dispensing low viscosity adhesives, TSP Polypro tips are specially designed to prevent clogging and crystallisation when dispensing Cyanoacrylates and other reactive liquids. The combination of soft tubing and polypropylene hubs resists chemical interaction, delivering consistent flow and extended tip life compared to standard needle-style dispensers.

Precision in Every Dispense

The soft tubing prevents scratching on sensitive substrates. Tips can be cut to a custom length for optimized control and precision across a wide range of dispensing tasks.

Universal Compatibility Across Syringe Systems

TSP Polypro tips are compatible with standard luer lock and luer slip syringe barrels and fittings. They perform reliably with a broad spectrum of fluids including instant adhesives, inks, primers, and activators. Certified silicone-free, these tips maintain purity and prevent contamination during sensitive dispensing applications.

Key Features:

- ✓ TSP Polypro Tube – Stops instant glues from rapid curing in the tip.
- ✓ Safety Locking Single Helix Hub – Secure, leak-free attachment with Luer-lock compatibility.
- ✓ Versatile Application – Compatible with syringe barrels, cartridges (using a tip adapter), and metering valves.
- ✓ Industrial Grade & Silicone-Free – Ensuring clean and precise dispensing for manufacturing and assembly applications.
- ✓ Reliable Performance. Designed to maintain consistent flow rates for all fluid types.
- ✓ Optional Tube Lengths. 0.50", 1", 1.5", 2".
- ✓ Sealed Boxes. Ensures tips are received dust free and easy to stack.

The TSP Polypro tip range uses a single-helix luer lock thread attachment for a leak-free connection.



Suitable for dispensing:
 Cyanoacrylate Adhesives
 Primers & Activators
 Flowable Silicones
 UV Cure Adhesives
 Marking Paints & Inks
 Lubricants & Grease

ADL brand TSP version



Gauge Size	Tube Colour	Connection	Material	0.5 Long Tube	1" Long Tube	1.5" Long Tube	2" Long Tube	Tube ID	Tube OD	Pack Size
14	White	Single Luer Lock	Polypropylene	TSP14-1/2	TSP14-1	TSP14-15	TSP14-2	1.30mm	1.78mm	50 or 500 pcs
15	White	Single Luer Lock	Polypropylene	TSP15-1/2	TSP15-1	TSP15-15	n/a	1.10mm	1.65mm	50 or 500 pcs
18	White	Single Luer Lock	Polypropylene	TSP18-1/2	TSP18-1	TSP18-15	n/a	0.84mm	1.30mm	50 or 500 pcs
20	Yellow	Single Luer Lock	Polypropylene	TSP20-1/2	TSP20-1	TSP20-15	n/a	0.60mm	0.93mm	50 or 500 pcs
22	White	Single Luer Lock	Polypropylene	TSP22-1/2	TSP22-1	TSP22-15	n/a	0.41mm	0.70mm	50 or 500 pcs
25	Red	Single Luer Lock	Polypropylene	TSP25-1/2	TSP25-1	TSP25-15	n/a	0.32mm	0.65mm	50 or 500 pcs

TECHCON brand TSP version



Gauge Size	Tube Colour	Connection	Material	1.5" Long Tube	Tube ID	Tube OD	Pack Size
15	Grey	Single Luer Lock	Polypropylene	TS15P-1-1/2	1.37mm	1.65mm	50 or 500 pcs
16	Brown	Single Luer Lock	Polypropylene	TS16P-1-1/2	1.19mm	1.47mm	50 or 500 pcs
18	Pink	Single Luer Lock	Polypropylene	TS18P-1-1/2	0.84mm	1.27mm	50 or 500 pcs
20	Yellow	Single Luer Lock	Polypropylene	TS20P-1-1/2	0.58mm	0.91mm	50 or 500 pcs
22	Black	Single Luer Lock	Polypropylene	TS22P-1-1/2	0.48mm	0.80mm	50 or 500 pcs
25	Red	Single Luer Lock	Polypropylene	TS25P-1-1/2	0.35mm	0.67mm	50 or 500 pcs

For the full website range, click [here](#)

Brush Dispensing Tips Round Style

Plastic Luer Lock Hub to Soft or Stiff Bristle Brush



AD Series Brush Tips Round Bristle

Material: Polypropylene, Stainless Steel, Nylon
 Tube Lengths: 1.5" - 38.1mm
 Brush Widths: 2mm, 3mm, 3.5mm, 4mm, 5mm, 6mm, 7mm
 Brush Colours: Yellow for Stiff, White for Soft
 Attachment: Luer Lock Thread (Double-Helix)
 Maximum Pressure: 100 PSI
 Pack Sizes: 1 Piece or 10 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 39269097
 Brand: Adhesive Dispensing Ltd



Tailored for Precision Application

Our double helix luer lock brush dispensing tips are ideal for spread applications, making them perfect for dispensing adhesives, greases, primers, activators, paints, and more.

Choose from:

- Brush Material: Stiffer Nylon Bristle or Softer Nylon Bristles
- Brush Shape: Round Style
- Bristle Widths: 2mm, 3mm, 3.5mm, 4mm, 5mm, 6mm, 7mm Wide
- Tip Gauge Size & Tube Diameter: From 14 Gauge to 32 Gauge Sizes
- Pack Sizes: Order 1 Piece or Packs of 10



Built for Industrial Use

Designed for seamless compatibility with syringe guns, pneumatic dispensers, metering valves, and XYZ robotic systems, our brush dispensing tips feature a threaded luer lock helix hub for secure attachment and safe use at high pressures.

Universal Compatibility Across Syringe Systems

Our brush tips are compatible with standard luer lock and luer slip syringe barrels and fittings. They perform reliably with a broad spectrum of fluids including adhesives, inks, primers, inks, paints, lubricants and activators. Certified silicone-free, these tips maintain purity and prevent contamination during sensitive dispensing applications.

Key Features:

- ✓ Soft or Hard Brushes for Spreading or Coating Applications.
- ✓ Safety Locking Double Helix Hub – Secure, leak-free attachment with Luer-lock compatibility.
- ✓ Versatile Application – Compatible with syringe barrels, cartridges (using a tip adapter), and metering valves.
- ✓ Industrial Grade & Silicone-Free – Ensuring clean and precise dispensing for manufacturing and assembly applications.
- ✓ Reliable Performance. Designed to maintain consistent flow rates for all fluid types.
- ✓ Wide Range of Bristle Widths. Wide Range of Gauge Sizes.
- ✓ Sealed Boxes. Ensures tips are received dust free and easy to stack.

Suitable for dispensing:

- Primers & Activators
- Flowable Gels
- Glues & Adhesives
- Marking Paints & Inks
- Lubricants & Grease

For the full website range, click [here](#)

Gauge	Hub Colour	Brush Type	2mm Wide	3mm Wide	3.5mm Wide	4mm Wide	5mm Wide	6mm Wide	7mm Wide	Tube ID
14	Olive	Stiff	n/a	n/a	n/a	AD-1005-14BT	AD-1006-14BT	AD-1009-14BT	AD-1018-14BT	1.60mm
15	Amber	Stiff	n/a	n/a	n/a	AD-1005-15BT	AD-1006-15BT	AD-1009-15BT	AD-1018-15BT	1.37mm
16	Grey	Stiff	n/a	n/a	n/a	AD-1005-16BT	AD-1006-16BT	AD-1009-18BT	AD-1018-18BT	1.22mm
18	Green	Stiff	n/a	AD-1003-18BT	AD-1004-18BT	AD-1005-18BT	AD-1006-18BT	AD-1009-20BT	AD-1018-20BT	0.89mm
20	Pink	Stiff	AD-1001-20BT	AD-1003-20BT	AD-1004-20BT	AD-1005-20BT	AD-1006-20BT	AD-1009-21BT	AD-1018-21BT	0.60mm
21	Purple	Stiff	AD-1001-21BT	AD-1003-21BT	AD-1004-21BT	AD-1005-21BT	AD-1006-21BT	AD-1009-22BT	AD-1018-22BT	0.51mm
22	Blue	Stiff	AD-1001-22BT	AD-1003-22BT	AD-1004-22BT	AD-1005-22BT	AD-1006-22BT	AD-1009-23BT	AD-1018-23BT	0.43mm
23	Orange	Stiff	AD-1001-23BT	AD-1003-23BT	AD-1004-23BT	AD-1005-23BT	AD-1006-23BT	AD-1009-25BT	AD-1018-25BT	0.33mm
25	Red	Stiff	AD-1001-25BT	AD-1003-25BT	AD-1004-25BT	AD-1005-25BT	AD-1006-25BT	AD-1009-27BT	AD-1018-27BT	0.25mm
27	Clear	Stiff	AD-1001-27BT	AD-1003-27BT	AD-1004-27BT	AD-1005-27BT	AD-1006-27BT	n/a	n/a	0.20mm
30	Lavender	Stiff	AD-1001-30BT	AD-1003-30BT	n/a	n/a	n/a	n/a	n/a	0.15mm
32	Yellow	Stiff	AD-1001-32BT	n/a	n/a	n/a	n/a	n/a	n/a	0.10mm

Gauge	Hub Colour	Brush Type	2mm Wide	3mm Wide	3.5mm Wide	4mm Wide	5mm Wide	6mm Wide	7mm Wide	Tube ID
14	Olive	Soft	n/a	n/a	n/a	AD-1005-14BTS	AD-1006-14BTS	AD-1009-14BTS	AD-1018-14BTS	1.60mm
15	Amber	Soft	n/a	n/a	n/a	AD-1005-15BTS	AD-1006-15BTS	AD-1009-15BTS	AD-1018-15BTS	1.37mm
16	Grey	Soft	n/a	n/a	n/a	AD-1005-16BTS	AD-1006-16BTS	AD-1009-18BTS	AD-1018-18BTS	1.22mm
18	Green	Soft	n/a	AD-1003-18BTS	AD-1004-18BTS	AD-1005-18BTS	AD-1006-18BTS	AD-1009-20BTS	AD-1018-20BTS	0.89mm
20	Pink	Soft	AD-1001-20BTSS	AD-1003-20BTS	AD-1004-20BTS	AD-1005-20BTS	AD-1006-20BTS	AD-1009-21BTS	AD-1018-21BTS	0.60mm
21	Purple	Soft	AD-1001-21BTS	AD-1003-21BTS	AD-1004-21BTS	AD-1005-21BTS	AD-1006-21BTS	AD-1009-22BTS	AD-1018-22BTS	0.51mm
22	Blue	Soft	AD-1001-22BTS	AD-1003-22BTS	AD-1004-22BTS	AD-1005-22BTS	AD-1006-22BTS	AD-1009-23BTS	AD-1018-23BTS	0.43mm
23	Orange	Soft	AD-1001-23BTS	AD-1003-23BTS	AD-1004-23BTS	AD-1005-23BTS	AD-1006-23BTS	AD-1009-25BTS	AD-1018-25BTS	0.33mm
25	Red	Soft	AD-1001-25BTS	AD-1003-25BTS	AD-1004-25BTS	AD-1005-25BTS	AD-1006-25BTS	AD-1009-27BTS	AD-1018-27BTS	0.25mm
27	Clear	Soft	AD-1001-27BTS	AD-1003-27BTS	AD-1004-27BTS	AD-1005-27BTS	AD-1006-27BTS	n/a	n/a	0.20mm
30	Purple	Soft	AD-1001-30BTS	AD-1003-30BTS	n/a	n/a	n/a	n/a	n/a	0.15mm
32	Yellow	Soft	AD-1001-32BTS	n/a	n/a	n/a	n/a	n/a	n/a	0.10mm

Brush Dispensing Tips Flat Style

Plastic Luer Lock Hub to Soft or Stiff Bristle Brush



AD Series Brush Tips Flat Bristle

Material:	Polypropylene, Stainless Steel, Nylon
Tube Lengths:	1.5" - 38.1mm
Brush Widths:	6mm, 7mm, 10mm, 11mm, 12mm, 14mm Wide
Attachment:	Luer Lock Thread (Double-Helix)
Flow Pattern:	Straight
Maximum Pressure:	100 PSI
Pack Sizes:	1 Piece or 10 Pieces
Details:	Industrial Grade, Silicone Free
Commodity Code:	39269097
Brand:	Adhesive Dispensing Ltd



Tailored for Precision Application

Our double helix luer lock brush dispensing tips are ideal for spread applications, making them perfect for dispensing adhesives, greases, primers, activators, paints, and more.

Choose from:

- Brush Material: Stiffer Nylon Bristle or Softer Nylon Bristles
- Brush Shape: Flat Style
- Bristle Widths: 6mm Wide, 7mm Wide
- Tip Gauge Size & Tube Diameter: From 14 Gauge to 27 Gauge Size
- Pack Sizes: Order 1 Piece or Packs of 10

Built for Industrial Use

Designed for seamless compatibility with syringe guns, pneumatic dispensers, metering valves, and XYZ robotic systems, our brush dispensing tips feature a threaded luer lock helix hub for secure attachment and safe use at high pressures.

Universal Compatibility Across Syringe Systems

Our brush tips are compatible with standard luer lock and luer slip syringe barrels and fittings. They perform reliably with a broad spectrum of fluids including adhesives, inks, primers, inks, paints, lubricants and activators. Certified silicone-free, these tips maintain purity and prevent contamination during sensitive dispensing applications.

Key Features:

- ✓ Soft or Hard Brushes for Spreading or Coating Applications.
- ✓ Safety Locking Double Helix Hub – Secure, leak-free attachment with Luer-lock compatibility.
- ✓ Versatile Application – Compatible with syringe barrels, cartridges (using a tip adapter), and metering valves.
- ✓ Industrial Grade & Silicone-Free – Ensuring clean and precise dispensing for manufacturing and assembly applications.
- ✓ Reliable Performance. Designed to maintain consistent flow rates for all fluid types.
- ✓ Wide Range of Bristle Widths. Wide Range of Gauge Sizes.
- ✓ Sealed Boxes. Ensures tips are received dust free and easy to stack.

Suitable for dispensing:

- Primers & Activators
- Flowable Gels
- Glues & Adhesives
- Marking Paints & Inks
- Lubricants & Grease

Gauge	Hub Colour	Brush Type	6mm Wide	7mm Wide	10mm Wide	11mm Wide	12mm Wide	14mm Wide	Tube ID
14	Olive	Stiff	AD-1008-14BT	AD-1010-14BT	AD-1011-14BT	AD-1011-14BTS	AD-1019-14BT	AD-1020-14BT	1.60mm
15	Amber	Stiff	AD-1008-15BT	AD-1010-15BT	AD-1011-15BT	AD-1011-15BTS	AD-1019-15BT	AD-1020-15BT	1.37mm
18	Green	Stiff	AD-1008-18BT	AD-1010-18BT	AD-1011-18BT	AD-1011-18BTS	AD-1019-18BT	AD-1020-18BT	1.22mm
20	Pink	Stiff	AD-1008-20BT	AD-1010-20BT	AD-1011-20BT	AD-1011-20BTS	AD-1019-20BT	AD-1020-20BT	0.89mm
21	Purple	Stiff	AD-1008-21BT	AD-1010-21BT	AD-1011-21BT	AD-1011-21BTS	AD-1019-21BT	AD-1020-21BT	0.60mm
22	Blue	Stiff	AD-1008-22BT	AD-1010-22BT	AD-1011-22BT	AD-1011-22BTS	AD-1019-22BT	AD-1020-22BT	0.51mm
23	Orange	Stiff	AD-1008-23BT	AD-1010-23BT	AD-1011-23BT	AD-1011-23BTS	AD-1019-23BT	AD-1020-23BT	0.43mm
25	Red	Stiff	AD-1008-25BT	AD-1010-25BT	AD-1011-25BT	AD-1011-25BTS	AD-1019-25BT	AD-1020-25BT	0.33mm
27	Clear	Stiff	AD-1008-27BT	AD-1010-27BT	AD-1011-27BT	AD-1011-27BTS	AD-1019-27BT	AD-1020-27BT	0.25mm

Gauge	Hub Colour	Brush Type	6mm Wide	7mm Wide	10mm Wide	11mm Wide	12mm Wide	14mm Wide	Tube ID
14	Olive	Soft	AD-1008-14BTS	AD-1010-14BTS	AD-1012-14BT	AD-1012-14BTS	AD-1019-14BTS	AD-1020-14BTS	1.60mm
15	Amber	Soft	AD-1008-15BTS	AD-1010-15BTS	AD-1012-15BT	AD-1012-15BTS	AD-1019-15BTS	AD-1020-15BTS	1.37mm
18	Green	Soft	AD-1008-18BTS	AD-1010-18BTS	AD-1012-18BT	AD-1012-18BTS	AD-1019-18BTS	AD-1020-18BTS	1.22mm
20	Pink	Soft	AD-1008-20BTS	AD-1010-20BTS	AD-1012-20BT	AD-1012-20BTS	AD-1019-20BTS	AD-1020-20BTS	0.89mm
21	Purple	Soft	AD-1008-21BTS	AD-1010-21BTS	AD-1012-21BT	AD-1012-21BTS	AD-1019-21BTS	AD-1020-21BTS	0.60mm
22	Blue	Soft	AD-1008-22BTS	AD-1010-22BTS	AD-1012-22BT	AD-1012-22BTS	AD-1019-22BTS	AD-1020-22BTS	0.51mm
23	Orange	Soft	AD-1008-23BTS	AD-1010-23BTS	AD-1012-23BT	AD-1012-23BTS	AD-1019-23BTS	AD-1020-23BTS	0.43mm
25	Red	Soft	AD-1008-25BTS	AD-1010-25BTS	AD-1012-25BT	AD-1012-25BTS	AD-1019-25BTS	AD-1020-25BTS	0.33mm
27	Clear	Soft	AD-1008-27BTS	AD-1010-27BTS	AD-1012-27BT	AD-1012-27BTS	AD-1019-27BTS	AD-1020-27BTS	0.25mm

For the full website range, click [here](#)

Brush Dispensing Tips Horsehair Flat Style

Plastic Luer Lock Hub to Soft Horse Hair Bristle Brush



AD Series Brush Tips 4mm, 5mm or 10mm Wide Flat

Material: Polypropylene, Stainless Steel, Sable
 Tube Lengths: 1.5" - 38.1mm
 Brush Widths: 4mm, 5mm, 10mm
 Brush Style: Flat
 Attachment: Luer Lock Thread (Double-Helix)
 Flow Pattern: Straight
 Maximum Pressure: 100 PSI
 Pack Sizes: 1 Piece
 Details: Industrial Grade, Silicone Free
 Commodity Code: 39269097
 Brand: Adhesive Dispensing Ltd



Tailored for Precision Application

Our double helix luer lock brush dispensing tips are ideal for spread applications, making them perfect for dispensing adhesives, greases, primers, activators, paints, and more.

Choose from:

- Brush Material: Super Soft Horse Hair Bristles
- Brush Shape: Flat Style
- Bristle Width: 4mm Wide, 5mm Wide, 10mm Wide
- Tip Gauge Size & Tube Diameter: From 14 Gauge to 27 Gauge Size
- Pack Sizes: Packs of 1

Built for Industrial Use

Designed for seamless compatibility with syringe guns, pneumatic dispensers, metering valves, and XYZ robotic systems, our brush dispensing tips feature a threaded luer lock helix hub for secure attachment and safe use at high pressures.

Universal Compatibility Across Syringe Systems

Our brush tips are compatible with standard luer lock and luer slip syringe barrels and fittings. They perform reliably with a broad spectrum of fluids including adhesives, inks, primers, inks, paints, lubricants and activators. Certified silicone-free, these tips maintain purity and prevent contamination during sensitive dispensing applications.

Key Features:

- ✓ Soft or Hard Brushes for Spreading or Coating Applications.
- ✓ Safety Locking Double Helix Hub – Secure, leak-free attachment with Luer-lock compatibility.
- ✓ Versatile Application – Compatible with syringe barrels, cartridges (using a tip adapter), and metering valves.
- ✓ Industrial Grade & Silicone-Free – Ensuring clean and precise dispensing for manufacturing and assembly applications.
- ✓ Reliable Performance. Designed to maintain consistent flow rates for all fluid types.
- ✓ Wide Range of Bristle Widths. Wide Range of Gauge Sizes.
- ✓ Sealed Boxes. Ensures tips are received dust free and easy to stack.


Suitable for dispensing:

- Primers & Activators
- Flowable Gels
- Glues & Adhesives
- Marking Paints & Inks
- Lubricants & Grease

Gauge Size	Hub Colour	Connection	4mm Wide	5mm Wide	10mm Wide	Brush Colour	Total Length	Tube ID	Pack Size
14	Olive	Double-Helix Luer Lock	AD-1017-14-BAR-4	AD-1017-14-BAR-5	AD-1017-14-BAR-10	Brown	1.5" - 38.1mm	1.60mm	1
15	Amber	Double-Helix Luer Lock	AD-1017-15-BAR-4	AD-1017-15-BAR-5	AD-1017-15-BAR-10	Brown	1.5" - 38.1mm	1.37mm	1
18	Green	Double-Helix Luer Lock	AD-1017-18-BAR-4	AD-1017-18-BAR-5	AD-1017-18-BAR-10	Brown	1.5" - 38.1mm	0.89mm	1
20	Pink	Double-Helix Luer Lock	AD-1017-20-BAR-4	AD-1017-20-BAR-5	AD-1017-20-BAR-10	Brown	1.5" - 38.1mm	0.60mm	1
21	Purple	Double-Helix Luer Lock	AD-1017-21-BAR-4	AD-1017-21-BAR-5	AD-1017-21-BAR-10	Brown	1.5" - 38.1mm	0.51mm	1
22	Blue	Double-Helix Luer Lock	AD-1017-22-BAR-4	AD-1017-22-BAR-5	AD-1017-22-BAR-10	Brown	1.5" - 38.1mm	0.43mm	1
23	Orange	Double-Helix Luer Lock	AD-1017-23-BAR-4	AD-1017-23-BAR-5	AD-1017-23-BAR-10	Brown	1.5" - 38.1mm	0.33mm	1
25	Red	Double-Helix Luer Lock	AD-1017-25-BAR-4	AD-1017-25-BAR-5	AD-1017-25-BAR-10	Brown	1.5" - 38.1mm	0.25mm	1
27	Clear	Double-Helix Luer Lock	AD-1017-27-BAR-4	AD-1017-27-BAR-5	AD-1017-27-BAR-10	Brown	1.5" - 38.1mm	0.20mm	1

Brush Dispensing Tips Pointed Style

Plastic Luer Lock Hub to Soft or Stiff Bristle Brush

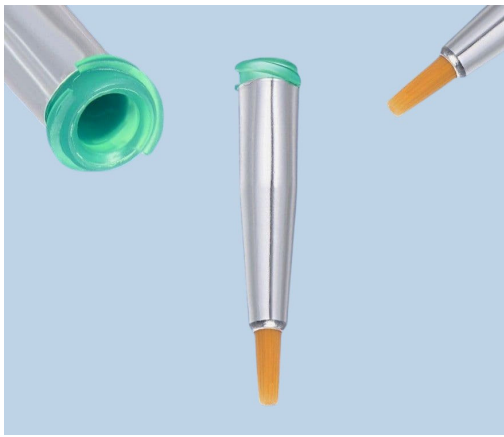

AD Series Brush Tips 4mm Wide Pointed

Material: Polypropylene, Stainless Steel, Nylon
 Tube Lengths: 1.5" - 38.1mm
 Brush Widths: 4mm
 Attachment: Luer Lock Thread (Double-Helix)
 Flow Pattern: Straight
 Maximum Pressure: 100 PSI
 Pack Sizes: 1 Piece or 10 Pieces
 Details: Industrial Grade, Silicone Free
 Commodity Code: 39269097
 Brand: Adhesive Dispensing Ltd



Tailored for Precision Application

Our double helix luer lock brush dispensing tips are ideal for spread applications, making them perfect for dispensing adhesives, greases, primers, activators, paints, and more.

Choose from:

- Brush Material: Stiffer Nylon Bristle or Softer Nylon Bristles
- Brush Shape: Pointed Style
- Bristle Width: 4mm Wide
- Tip Gauge Size & Tube Diameter: From 14 Gauge to 27 Gauge Size
- Pack Sizes: Order 1 Piece or Packs of 10

Built for Industrial Use

Designed for seamless compatibility with syringe guns, pneumatic dispensers, metering valves, and XYZ robotic systems, our brush dispensing tips feature a threaded luer lock helix hub for secure attachment and safe use at high pressures.

Universal Compatibility Across Syringe Systems

Our brush tips are compatible with standard luer lock and luer slip syringe barrels and fittings. They perform reliably with a broad spectrum of fluids including adhesives, inks, primers, inks, paints, lubricants and activators. Certified silicone-free, these tips maintain purity and prevent contamination during sensitive dispensing applications.

Key Features:

- ✓ Soft or Hard Brushes for Spreading or Coating Applications.
- ✓ Safety Locking Double Helix Hub – Secure, leak-free attachment with Luer-lock compatibility.
- ✓ Versatile Application – Compatible with syringe barrels, cartridges (using a tip adapter), and metering valves.
- ✓ Industrial Grade & Silicone-Free – Ensuring clean and precise dispensing for manufacturing and assembly applications.
- ✓ Reliable Performance. Designed to maintain consistent flow rates for all fluid types.
- ✓ Wide Range of Bristle Widths. Wide Range of Gauge Sizes.
- ✓ Sealed Boxes. Ensures tips are received dust free and easy to stack.



Suitable for dispensing:

- Primers & Activators
- Flowable Gels
- Glues & Adhesives
- Marking Paints & Inks
- Lubricants & Grease


Gauge Size	Hub Colour	Connection	Part Code	Brush Width	Brush Colour	Brush Type	Total Length	Tube ID
14	Olive	Double-Helix Luer Lock	AD-1013-14BT	4mm	Yellow	Hard	1.5" - 38.1mm	1.60mm
15	Amber	Double-Helix Luer Lock	AD-1013-15BT	4mm	Yellow	Hard	1.5" - 38.1mm	1.37mm
16	Grey	Double-Helix Luer Lock	AD-1013-16BT	4mm	Yellow	Hard	1.5" - 38.1mm	1.22mm
18	Green	Double-Helix Luer Lock	AD-1013-18BT	4mm	Yellow	Hard	1.5" - 38.1mm	0.89mm
20	Pink	Double-Helix Luer Lock	AD-1013-20BT	4mm	Yellow	Hard	1.5" - 38.1mm	0.60mm
21	Purple	Double-Helix Luer Lock	AD-1013-21BT	4mm	Yellow	Hard	1.5" - 38.1mm	0.51mm
22	Blue	Double-Helix Luer Lock	AD-1013-22BT	4mm	Yellow	Hard	1.5" - 38.1mm	0.43mm
23	Orange	Double-Helix Luer Lock	AD-1013-23BT	4mm	Yellow	Hard	1.5" - 38.1mm	0.33mm
25	Red	Double-Helix Luer Lock	AD-1013-25BT	4mm	Yellow	Hard	1.5" - 38.1mm	0.25mm
27	Clear	Double-Helix Luer Lock	AD-1013-27BT	4mm	Yellow	Hard	1.5" - 38.1mm	0.20mm

Gauge Size	Hub Colour	Connection	Part Code	Brush Width	Brush Colour	Brush Type	Total Length	Tube ID
14	Olive	Double-Helix Luer Lock	AD-1013-14BTS	4mm	White	Soft	1.5" - 38.1mm	1.60mm
15	Amber	Double-Helix Luer Lock	AD-1013-15BTS	4mm	White	Soft	1.5" - 38.1mm	1.37mm
16	Grey	Double-Helix Luer Lock	AD-1013-16BTS	4mm	White	Soft	1.5" - 38.1mm	1.22mm
18	Green	Double-Helix Luer Lock	AD-1013-18BTS	4mm	White	Soft	1.5" - 38.1mm	0.89mm
20	Pink	Double-Helix Luer Lock	AD-1013-20BTS	4mm	White	Soft	1.5" - 38.1mm	0.60mm
21	Purple	Double-Helix Luer Lock	AD-1013-21BTS	4mm	White	Soft	1.5" - 38.1mm	0.51mm
22	Blue	Double-Helix Luer Lock	AD-1013-22BTS	4mm	White	Soft	1.5" - 38.1mm	0.43mm
23	Orange	Double-Helix Luer Lock	AD-1013-23BTS	4mm	White	Soft	1.5" - 38.1mm	0.33mm
25	Red	Double-Helix Luer Lock	AD-1013-25BTS	4mm	White	Soft	1.5" - 38.1mm	0.25mm
27	Clear	Double-Helix Luer Lock	AD-1013-27BTS	4mm	White	Soft	1.5" - 38.1mm	0.20mm

For the full website range, click [here](#)

Sponge Dispensing Tips

Plastic or Aluminium Luer Lock Hub to White Sponge Head

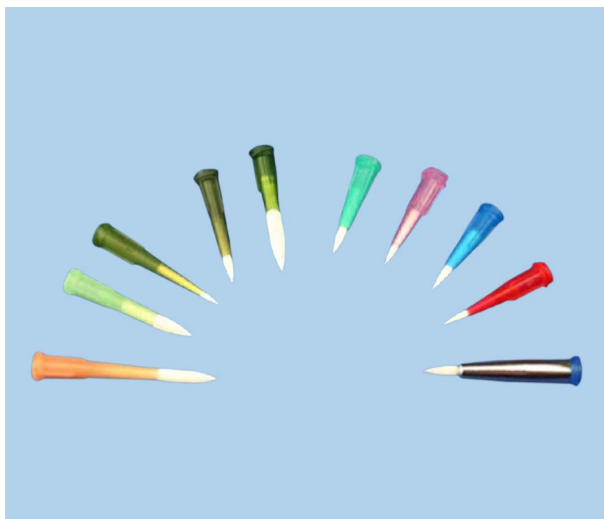

AD Series Sponge Tips

Material:	Polypropylene, Stainless Steel, Aluminium, Sponge
Attachment:	Luer Lock Thread (Double-Helix)
Flow Pattern:	Straight
Maximum Pressure:	100 PSI
Pack Sizes:	1 Piece
Details:	Industrial Grade, Silicone Free
Commodity Code:	39269097
Brand:	Adhesive Dispensing Ltd



Tailored for Precision Application

Soft sponge head tips for coating and spreading. Inner diameter sizes of 3.10mm to 0.20mm. For use with oils, paints, inks, coatings, primers, activators and other low viscosity liquids. The soft sponge head will not damage sensitive substrates or scratch surfaces. Double helix luer lock colour coded hubs. High quality tips for spreading, coating and bonding applications. In packs of 1.

Built for Industrial Use

Designed for seamless compatibility with syringe guns, pneumatic dispensers, metering valves, and XYZ robotic systems, our sponge dispensing tips feature a threaded luer lock helix hub for secure attachment and safe use at high pressures.

Universal Compatibility Across Syringe Systems

Our sponge tips are compatible with standard luer lock and luer slip syringe barrels and fittings. They perform reliably with a broad spectrum of fluids including adhesives, inks, primers, inks, paints, lubricants and activators. Certified silicone-free, these tips maintain purity and prevent contamination during sensitive dispensing applications.

Key Features:

- ✓ Soft for Spreading or Coating Applications.
- ✓ Safety Locking Double Helix Hub – Secure, leak-free attachment with Luer-lock compatibility.
- ✓ Versatile Application – Compatible with syringe barrels, cartridges (using a tip adapter), and metering valves.
- ✓ Industrial Grade & Silicone-Free – Ensuring clean and precise dispensing for manufacturing and assembly applications.
- ✓ Reliable Performance. Designed to maintain consistent flow rates for all fluid types.
- ✓ Range of Gauge Sizes.
- ✓ Sealed Boxes. Ensures tips are received dust free and easy to stack.

Suitable for dispensing:

- Primers & Activators*
- Flowable Liquids*
- Water Based Glues & Adhesives*
- Marking Paints & Inks*
- Lubricants & Grease*

Gauge Size	Tip Colour	Connection	Part Code	Sponge Length	Sponge Colour	Body Type	Tip Length	Tip ID	Pack Size
10	Lime	Double-Helix Luer Lock	AD-BT-PS-10	8.0mm	White	Plastic	38.0mm	3.10mm	1
14	Olive	Double-Helix Luer Lock	AD-BT-PS-14	8.0mm	White	Plastic	38.0mm	1.60mm	1
18	Green	Double-Helix Luer Lock	AD-BT-PS-18	8.0mm	White	Plastic	38.0mm	0.84mm	1
20	Pink	Double-Helix Luer Lock	AD-BT-PS-20	8.0mm	White	Plastic	28.0mm	0.61mm	1
22	Blue	Double-Helix Luer Lock	AD-BT-PS-22	8.0mm	White	Plastic	25.0mm	0.41mm	1
23	Orange	Double-Helix Luer Lock	AD-BT-PS-23	8.0mm	White	Plastic	25.0mm	0.33mm	1
25	Red	Double-Helix Luer Lock	AD-BT-PS-25	8.0mm	White	Plastic	30.0mm	0.25mm	1

Gauge Size	Hub Colour	Connection	Part Code	Sponge Length	Sponge Width	Body Type	Tip Length	Tip ID	Pack Size
20	Pink	Double-Helix Luer Lock	AD-BT-PM-20	9.0mm	3.0mm	Aluminium	40.0mm	0.61mm	1
21	Purple	Double-Helix Luer Lock	AD-BT-PM-21	9.0mm	3.0mm	Aluminium	40.0mm	0.51mm	1
22	Blue	Double-Helix Luer Lock	AD-BT-PM-22	9.0mm	3.0mm	Aluminium	40.0mm	0.41mm	1
23	Orange	Double-Helix Luer Lock	AD-BT-PM-23	9.0mm	3.0mm	Aluminium	40.0mm	0.33mm	1
24	Dark Red	Double-Helix Luer Lock	AD-BT-PM-24	9.0mm	3.0mm	Aluminium	40.0mm	0.27mm	1
25	Red	Double-Helix Luer Lock	AD-BT-PM-25	9.0mm	3.0mm	Aluminium	40.0mm	0.25mm	1
26	Light Orange	Double-Helix Luer Lock	AD-BT-PM-26	9.0mm	3.0mm	Aluminium	40.0mm	0.24mm	1
27	Clear	Double-Helix Luer Lock	AD-BT-PM-27	9.0mm	3.0mm	Aluminium	40.0mm	0.20mm	1

For the full website range, click [here](#)

Dispensing Tip Kits

Assorted Tip Kits for Test and Evaluation



AD Series Luer Lock Tip Kits

Attachment: Luer Lock Thread (Double-Helix)
 Maximum Pressure: 100 PSI
 Pack Sizes: Assorted
 Details: Industrial Grade, Silicone Free
 Commodity Code: 39269097
 Brand: Adhesive Dispensing Ltd



High-Performance Dispensing Tips for Precision Fluid Application

Adhesive Dispensing Ltd supplies industrial-grade dispensing tips designed for accurate, consistent application of a wide range of fluids. Our tips are compatible with syringe barrels, dispensing valves, and fluid fittings, all featuring a secure Luer lock hub connection to ensure leak-free performance.

Product Highlights:

- Colour-coded hubs for easy identification of gauge size
- Available in a variety of styles
- Precision stainless steel tips
- Smooth-flow tapered tips
- Flexible polypropylene tips
- Soft brush tips
- PTFE-lined tips
- Angled and specialty tips
- Supplied in sealed, batch-coded packs for full traceability
- Certified silicone-free and rated up to 100 PSI
- Ideal for evaluating performance across different applications



Suitable for dispensing:

- Most Adhesives & Glues
- Solvent Based Glues
- UV Cure Adhesives
- Silicones & RTVs
- Activators & Primers
- Solder Pastes & Fluxes
- Braze Pastes & Fluxes
- SMT Adhesives
- Threadlockers
- Paints & Inks
- Lubricants & Grease
- Many more...

Our tip kits offer a convenient and cost-effective way to trial multiple dispensing tip styles before selecting the best match for your application.

Part Code	Gauge Sizes	Tip Types	IDs	Pack Size
DCK600	14 to 30	Tapered, Blunt End 0.5", 45°, 90° 0.5", Tip Caps, Boxed Kit	1.60mm to 0.15mm	145 pcs
DCK700	14 to 30	Tapered, Blunt End 0.5", Flexible Polypro, Teflon Lined Crimped, Tip Caps, Boxed Kit	1.60mm to 0.15mm	145 pcs
TN00DKIT	14 to 30	Tapered, Blunt End 0.5", 45°, 90° 0.5", Tip Caps, Boxed Kit	1.60mm to 0.15mm	145 pcs
DCK500	14 to 30	Tapered, Blunt End 0.5", Flexible Polypro, Teflon Lined Crimped, Tip Caps, Barrels, Pistons	1.60mm to 0.15mm	145 pcs
QK-NSK	14 to 32	Tapered, Blunt End 0.5", Flexible Polypro, Teflon Lined Crimped	1.60mm to 0.10mm	50 pcs
SA7521	14 to 27	Smooth Flow Tapered Tip Small Kit	1.60mm to 0.20mm	21 pcs
SA7781	14 to 22	Smooth Flow Tapered Tip Medium Kit	1.60mm to 0.41mm	50 pcs
SA7400	14 to 32	Smooth Flow Tapered Tip Medium Kit	1.60mm to 0.10mm	50 pcs
SA7771	14 to 32	Smooth Flow Tapered Tip Large Kit	1.60mm to 0.10mm	70 pcs
SA7519	14 to 26	Smooth Flow Tapered Tip Large Kit	1.60mm to 0.22mm	175 pcs
SA7580	10 to 32	Smooth Flow Tapered Tip Complete Kit	1.60mm to 0.10mm	800 pcs
SA7500	10 to 13	Smooth Flow Tapered Tip Large Diameter Kit	3.0mm to 2.0mm	150 pcs
SA7501	8 to 13	Smooth Flow Tapered Tip Large Diameter Kit	3.5mm to 2.0mm	200 pcs
SA7502	27 to 32	Smooth Flow Tapered Tip Micro Diameter Kit	0.20mm to 0.10mm	150 pcs
SA303234	30 to 34	General Purpose AD Series Blunt End Tips 0.25" Tube Length	0.15mm to 0.08mm	50 pcs
SA7522	14 to 32	General Purpose AD Series Blunt End Tips 0.5" Tube Length	1.60mm to 0.10mm	34 pcs
SA7523	14 to 30	General Purpose E Series Blunt End Tips 0.5" Tube Length	1.60mm to 0.18mm	26 pcs
SA7122	12 to 32	General Purpose AD Series Blunt End Tips 1" Tube Length	2.26mm to 0.10mm	95 pcs
SA7524	14 to 30	General Purpose AD Series Blunt End Tips 1" Tube Length	1.60mm to 0.15mm	50 pcs
SA7204	14 to 28	General Purpose AD Series Blunt End Tips 2", 3", 4", 5" Tube Length	1.60mm to 0.18mm	84 pcs
AD14SS-050	14 to 18	All Metal Blunt End Precision Tips 0.5" Tube Length	1.60mm to 0.84mm	50 pcs
QK-SSTK	13 to 30	All Metal Blunt End Precision Tips 0.5" Tube Length	1.94mm to 0.15mm	12 pcs
AD14SS-1	14 to 18	All Metal Blunt End Precision Tips 1" Tube Length	1.60mm to 0.84mm	50 pcs
SA7955	14 to 30	PTFE Flexible Tube 0.5" Long Assorted Tip Kit	1.68mm to 0.30mm	16 pcs
SA7549	14 to 25	Polypro Flexible Tube 0.5" & 1" Long Assorted Tip Kit	1.40mm to 0.35mm	40 pcs
SA7899	14 to 30	Flexible Polypro, Flexible PTFE, Teflon Lined Crimped	1.40mm to 0.20mm	52 pcs
SA7893	14 to 30	Flexible Polypro, Flexible PTFE, Teflon Lined Crimped	1.40mm to 0.20mm	72 pcs

High-quality plastic and metal dispensing tips that are used by the most demanding industries in the world.

Adhesive Dispensing Ltd products are accepted by the aerospace, medical device, automotive, consumer electronics and military & defence sectors.

Through months of research and refinement, testing and trial & error, Adhesive Dispensing Ltd is proud to announce our new level of quality standards for cleanliness, consistency, purity, resistance to impact, high pressure, or extreme temperatures, for all our plastic packaging products.

Our focus is not on meeting standards set by local, national, or global authorities. Our focus is on exceeding your standards. And continuing to raise our own.

ADHESIVE DISPENSING LTD TIP STANDARDS 2026

When you purchase from our line of high-quality dispensing luer lock tips, you can rest assured each piece was produced while adhering to the **ADHESIVE DISPENSING LTD TIP STANDARDS**:

- Meet or exceed industry standards for repeatability
- Meet or exceed industry standards for UV blockage
- Meet or exceed global ROHS and REACH standards
- Achieve Impact resistance two-times industry requirements
- Produced in a Silicon-free, Chloride-free environment
- Approved for operating pressures up to 100 psi/6.9 bar
- Approved for storage temperatures as low as -40 F/-40° C and as high as 100 F/38° C

Adhesive Dispensing Tip Standards require that all parts are completely free of:

- ✓ Loose Debris ✓ Cold Slugs ✓ Waviness ✓ Contamination ✓ Delamination ✓ Grease ✓ Blush ✓ Orange Peel ✓ Lubricants ✓ Flow Lines ✓ Cracking ✓ Burns
- ✓ Knit Lines ✓ Cracking ✓ Gas Marks ✓ Weld Lines ✓ Nicks/Gouges ✓ Marbling ✓ Loose Debris, Contamination ✓ Burrs

Adhesive Dispensing Ltd Precision Dispensing Tips are designed to meet the most demanding manufacturing standards. Leading edge materials and advanced engineering design make our tips unparalleled in dispensing performance.

ADHESIVE DISPENSING LTD CLEANLINESS STATEMENT

All Adhesive Dispensing Ltd tips packaging products are moulded and assembled in a controlled clean environment to ensure the highest standards of cleanliness and that our products are free of loose contaminants or debris.

INDUSTRIAL CERTIFICATION

Adhesive Dispensing Ltd certifies that our Precision Dispensing Tip Components meet or exceed ASTM and industry standards, as tested in laboratory conditions, in the following areas:

Accuracy and Repeatability – Meet or exceed the repeatability requirement for industrial dispensing use. For the highest rate of dispensing accuracy and repeatability.

Silicone and Chloride Free – Moulded or assembled in a Silicone- and Chloride-free environment to prevent contamination.

ROHS and REACH Compliant – Adhesive Dispensing Ltd takes every precaution to ensure none of our tip products contain any SVHC (Substances of Very High Concern).

Pressure Strength – Designed for operating pressures up to 100 psi (6.9 bar). All tips pass the destructive pressure burst test.

Storage Temperature – Can be stored (with no pressure applied) between -40 F° and 100 F° (-40° C - 38° C).

UV Block Capability – UV designed tip products meet or exceed industry standards for UV blockage.

Transportation – Dispensing tips are safe to transport by ground, sea, or air.

WARRANTY

Adhesive Dispensing Tip Consumable Warranty Policy

“Consumables” are primarily plastic and metal disposable parts, such as syringes, pistons, dispense tips, taper tips, cartridges, plungers, etc. and designed for single use.

Adhesive Dispensing Ltd warrants these products against dimensional issues, visual defects, or damage. Adhesive Dispensing Ltd will replace defective consumable items free of charge at its sole discretion.

Replacement of consumable parts is determined on a case-by-case basis and normally validated by return of sample parts to Adhesive Dispensing Ltd for inspection.

A Return Material Authorisation (RMA) number must be obtained before returning any goods. The customer pays for inbound freight, and Adhesive Dispensing Ltd pays for return freight of the same category for replaced consumables.

If it is determined that the products have been misused, such as using the products for purposes they were not designed for, or if there are unauthorised modifications, then the guarantee is void.

Please note: Plastic and metal consumables have a recommended “shelf life” or “use by” of two (2) years from the date of delivery. If the consumables are stored appropriately, they may be usable beyond that date. Adhesive Dispensing Ltd cannot guarantee their quality after the two-year period.

PLACING ORDERS

Our websites allow customers to place orders securely online and make payments. Account customers can login and use an official company PO number to place an order.

Once the order is made, our support team will email an acknowledgement confirming an expected shipping date. We use only tracked couriers such as DHL, FedEx or UPS.

Prices are subject to change without notice. Please check our websites for the latest pricing. We carry extensive volumes of dispensing tips but some are made to order and there can be a lead time. For urgent requirements, please phone our sales team on +44 (0) 1908 686660.

Statements, technical information and recommendations contained herein are based on tests we believe to be reliable but they are not to be construed in any manner as warranties expressed or implied. The user shall determine the suitability of the product for his intended use and the user assumes all risk and liability whatsoever in connection therewith.

HOW TO ORDER

Simply quote our part number, quantity required, your order number or reference and delivery address - it couldn't be easier.

1

BY TELEPHONE:
01908 686660

2

BY FAX:
01908 686836

3

FROM OUR WEBSITE:
adhesivedispensers.co.uk

4

BY EMAIL:
orders@adhesivedispensers.co.uk

HOURS OF BUSINESS

MONDAY TO FRIDAY 9AM TO 5.30PM

Reasons to use our dispensing components

- Industrial grade** - certified safe for use to 025 psi. Will not break when in use under pneumatic or mechanical pressure.
- Certified Silicone-Free**. Our components will not contaminate fluids placed when in use including specialist adhesives.
- Burr-free**. All blunt tips are electro-polished and produced to a high precision finish.
- Widest range** - we stock millions of parts in many different styles and an extensive range of cartridges, nozzles, mixers.
- Fast lead times**. Most products are held in stock and available within days not weeks.
- Boxed** - most of our tips are supplied in sealed boxes for easy identification and protection against contamination.
- Batch codes** - all labelled with batch codes for traceability.
- Expert support**. We recommend our products to ensure our customers receive the right solution for their application.



British
Chambers of
Commerce



HOW TO PAY

We are happy to accept payment by the following methods:

CREDIT CARD

Please quote your card number, start and expiry dates and security digits together with your name, address and delivery address.



CHEQUE

Cheques for collection must be supported by a valid bank guarantee card.

ACCOUNT

Accounts may be opened within 4 hours, subject to status, following receipt of a completed account application form. Please contact our Accounts Department direct on **01908 686663** for further details.


PRICES GIVEN ARE IN POUNDS STERLING AND MAY BE SUBJECT TO CHANGE

ALL PRICES ARE SUBJECT TO VAT

Standard Terms and Conditions apply

GOODS COLLECTION

Pre-ordered goods can be collected from our Milton Keynes warehouse facility by arrangement only.

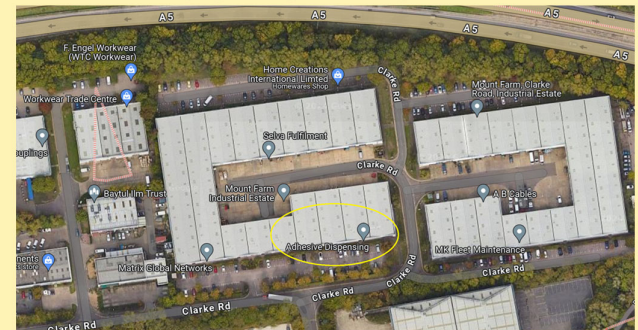

Overseas Delivery Charges

We ship goods into Europe, North and South America, Asia, Middle East, Australia and Africa. We use UPS, FedEx, DHL and Postal Services. Please contact us for specific pricing and options for all overseas shipping.

Visit our growing customer tech knowledge base for more product information, data sheets, videos and advice.

https://www.adhesivedispensing.net/kb_results.asp



Adhesive Dispensing Ltd
Solutions customers stick with...

Adhesive Dispensing Ltd
14 Clarke Road
Milton Keynes
Buckinghamshire, MK1 1LG, UK
Tel. +44 (0) 1908 686660
Fax. +44 (0) 1908 686836
orders@adhesivedispensing.com
www.adhesivedispensing.co.uk

© 2026 Adhesive Dispensing Ltd